Driver and Event

Name	Tom Cockerill
Date	Dec '13
Event	MCCD Christmas Race
Weather	Indoors
Result	3rd

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	Sanwa
Reciever	KO
Batteries	Nosram Saddle 5800
Motor	Nosram Pure 2 6.5
Spur Gear	98T [x] 95T [ ]
Pinion	19
LH Cell Position	Forward [ ] Backward [x]

Track Conditions

Surface	Carpet
Grip Level	Medium > Low
Track Condition	Smooth, Wooden Jumps

Wheels and Tyres

Rear Wheels	Schumacher Hex
Rear Tyre	Handout Out
Rear Insert	Sch Medium (U6734)
Front Wheels	Schumacher Hex
Front Tyre	Handout
Front Insert	Sch Medium (U6733)

Diff Type

			Diff Oil
Front	Ball [ ]	Gear [x]	20,000
Rear	Ball [ ]	Gear [x]	20,000

Additional Settings

Car Weight	1746
Weights Added	None
Chassis Carbon [x]	Option [ ]
Wing Gurney Height	Cut mm

NOTES

Core RC Springs & Oil
Vented Shock Caps (U4209)
Alloy Yokes (U3404)

Front Shocks

Oil 450	Spring Red	Shock Cap Vented [ ]	Sealed [ ] Emulsion [x]
Piston 2 Hole			
Drilled [x]	Hole Size 1.7 mm		



Shock Length 82.00 mm

Rear Shocks

Oil 350	Spring Red	Shock Cap Vented [ ]	Sealed [ ] Emulsion [x]
Piston 2 Hole			
Drilled [x]	Hole Size 1.8 mm		



Shock Length 96.60 mm


Front Suspension

Anti roll bar No [ ] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height -2.0 Deg

Toe-In -1.0 Deg


Ride Height 18 mm



Track Washers None mm

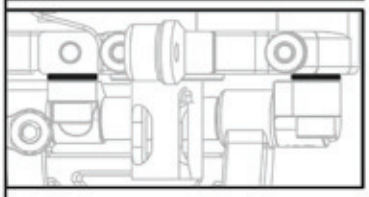


Blocks Moulded [x] Alloy [ ]

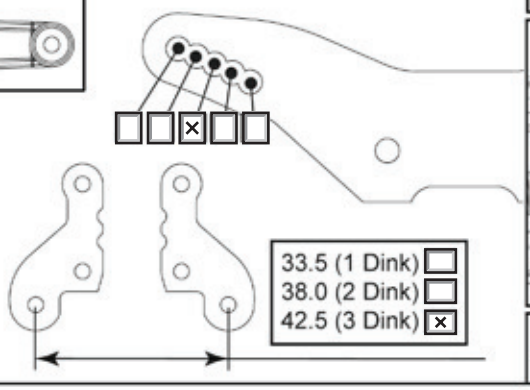


33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Link Washers 2.0 mm



Front Rake
10.0 Deg [x] 7.5 Deg [ ]

Washers 1.0 mm



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [x]

Rear Suspension

Anti roll bar No [x] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -2.0 Deg


Ride Height 18 mm

Wheelbase Short [ ] Med [ ] Long [x]


Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [•]
3.00 Difference = 3.90° Toe-in [ ]

Rear N/A mm Front N/A mm

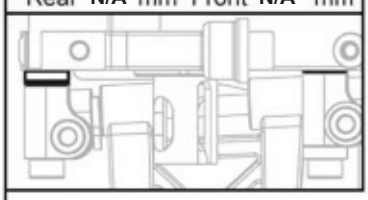

Blocks Moulded [x] Alloy [ ]

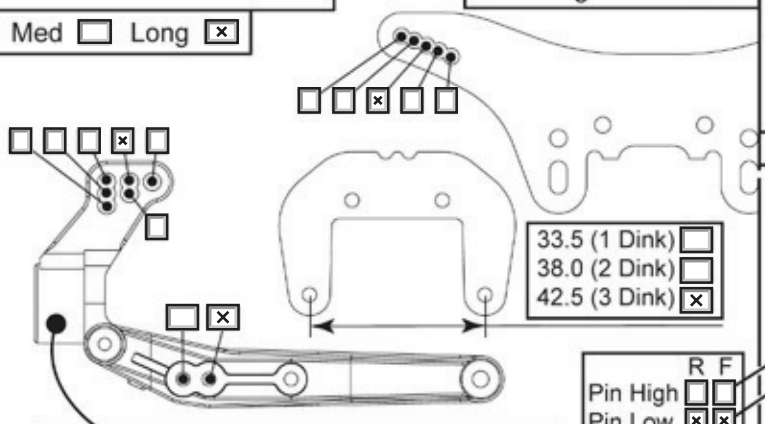

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [x]

Rear Hub Carrier Alloy [ ] Std [x]


Alloy Hub Carrier +1° [ ] -1° [ ]

Pin High R [ ] F [ ]
Pin Low R [x] F [x]

Anti-squat Washers

0.00 Difference = 0.00° Anti-squat [ ]
0.50 Difference = 0.60° Anti-squat [ ]
1.00 Difference = 1.30° Anti-squat [ ]
1.50 Difference = 1.95° Anti-squat [ ]
2.00 Difference = 2.60° Anti-squat [•]
2.50 Difference = 3.25° Anti-squat [ ]
3.00 Difference = 3.90° Anti-squat [ ]

Rear N/A mm Front N/A mm

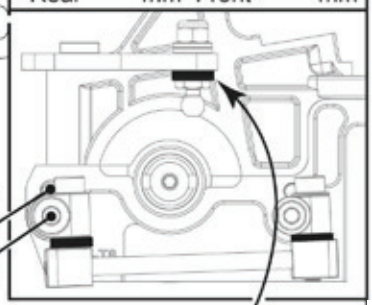

Link Washers 3.0 mm