Driver and Event

Name	Tom Cockerill
Date	June '13
Event	Belgium GP
Weather	Dry
Result	TQ & Win

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	Spektrum
Reciever	KO
Batteries	Nosram 5800
Motor	Nosram Pure 2 7.5
Spur Gear	98T [X] 95T [ ]
Pinion	20
LH Cell Position	Forward [ ] Backward [X]

Track Conditions

Surface	Astroturf
Grip Level	High
Track Condition	Smooth

Wheels and Tyres

Rear Wheels	Schumacher FlexLite
Rear Tyre	Sch Yellow MiniSpike
Rear Insert	Schumacher Medium
Front Wheels	Schumacher FlexLite
Front Tyre	Sch Yellow MiniSpike
Front Insert	Schumacher Medium

Diff Type

		Diff Oil
Front	Ball [X] Gear [ ]	N/A
Rear	Ball [ ] Gear [X]	5000

CAT K1

Additional Settings


Car Weight	1754g
Weights Added	N/A
Chassis	Alloy [X] Option [ ]

NOTES

CoreRC Springs & Oil
2 Outer 1 Inner Rows Removed on Front Tyre
Big Bore Shocks

Rear Shocks


Oil	350	Spring	Blue
Shock Cap	Sealed [ ]	Vented [ ]	Emulsion [X]
Piston	3 Hole		
Drilled [X]	Hole Size	1.70	mm



Shock Length 96.0 mm

Front Shocks

Oil	450	Spring	Red
Shock Cap	Sealed [ ]	Vented [ ]	Emulsion [X]
Piston	3 Hole (Standard)		
Drilled [ ]	Hole Size		mm



Shock Length 84.25 mm

Rear Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Wheelbase Short [ ] Med [ ] Long [X]


Camber at Ride Height -2.0 Deg

Ride Height 21 mm


Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [X]
3.00 Difference = 3.90° Toe-in [ ]

Rear 0 mm Front 0 mm



Blocks Moulded [X] Alloy [ ]

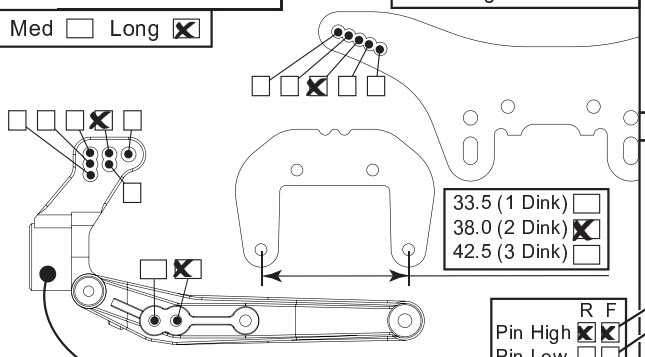

33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

R F
Pin High [X] [X]
Pin Low [ ] [ ]


Rear Hub Carrier Alloy [ ] Std [X]

Alloy Hub Carrier +1° [ ] -1° [ ]

Anti-squat Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [X]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [ ]
3.00 Difference = 3.90° Toe-in [ ]

Rear mm Front mm



Link Washers 1.0 mm

Front Suspension


Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -1.5 Deg


Ride Height 20 mm

Toe-In +/- 0 Deg


Washers 2.0 mm



Track Washers 1.0 mm




Blocks Moulded [ ] Alloy [X]

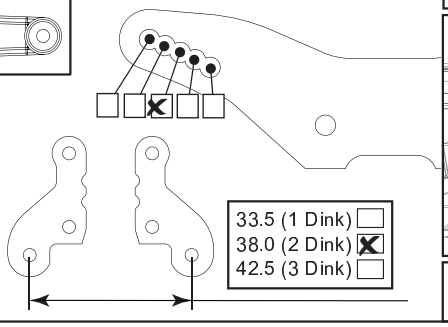


33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

Link Washers 2.0 mm



Front Rake
10.0 Deg [X] 7.5 Deg [ ]



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [X]