Driver and Event

Name	Tom Cockerill
Date	May '13
Event	Southport National
Weather	Dry
Result	4th

Electrics and Gearing

E.S.C	Nosram Comet HD
Servo	Spektrum
Reciever	KO
Batteries	Nosram 5800 Saddle
Motor	Nosram Pure2 6.5
Spur Gear	98T [X] 95T [ ]
Pinion	20
LH Cell Position	Forward [ ] Backward [X]

Track Conditions

Surface	AstroTurf
Grip Level	High
Track Condition	Bumpy

Wheels and Tyres

Rear Wheels	Schumacher RevLite
Rear Tyre	Schumacher MiniSpike
Rear Insert	Schumacher Medium
Front Wheels	Schumacher RevLite
Front Tyre	Sch Slim MiniSpike
Front Insert	Schumacher Medium

Diff Type

		Diff Oil
Front	Ball [X] Gear [ ]	
Rear	Ball [X] Gear [ ]	

CAT K1

Additional Settings


Car Weight	1760
Weights Added	35g FR Corner
Chassis	Alloy [ ] Option [X]

NOTES

Core RC Springs & Oil
Big Bore Shocks
S1 Chassis

Rear Shocks


Oil 400	Spring Blue	Shock Cap Sealed [ ] Vented [ ] Emulsion [X]
Piston 2 Hole		
Drilled [X]	Hole Size 1.70 mm	



Shock Length 96.0 mm

Front Shocks

Oil 450	Spring Blue	Shock Cap Sealed [ ] Vented [ ] Emulsion [X]
Piston 3 Hole		
Drilled [X]	Hole Size 1.70 mm	



Shock Length 84.25mm

Rear Suspension

Anti roll bar No [ ] 1.00 [X] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Wheelbase Short [ ] Med [X] Long [ ]


Camber at Ride Height -1.5 Deg

Ride Height 19 mm


Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [ ]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [X]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear 3.0 mm Front 0.5 mm



Blocks Moulded [ ] Alloy [X]

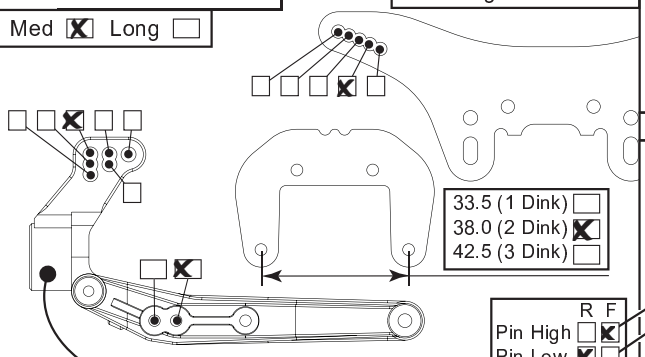

33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

R F
Pin High [ ] [X]
Pin Low [X] [ ]


Rear Hub Carrier Alloy [ ] Std [X]

Alloy Hub Carrier +1° [ ] -1° [ ]

Anti-squat Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [X]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [ ]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear 0 mm Front 3.0 mm



Link Washers 3.0 mm


Front Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height -1.5 Deg

Ride Height 19 mm


Toe-In +/- 0 Deg



Track Washers 0 mm




Blocks Moulded [X] Alloy [ ]

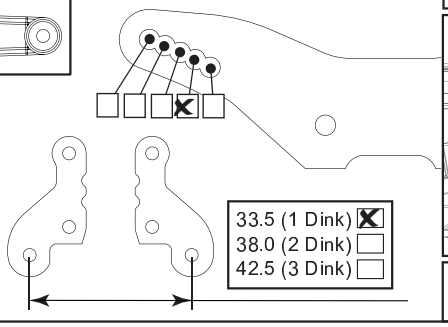


33.5 (1 Dink) [X]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [ ]

Link Washers 2.0 mm



Front Rake
10.0 Deg [X] 7.5 Deg [ ]

Washers 0 mm



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [X]