Driver and Event

Name	LANTHEAUME Armand
Date	09/10.03.2013
Event	CF1 Louvre
Weather	
Result	Q:3 F:3

Electrics and Gearing

E.S.C	SP reventon Pro
Servo	Savox 1258TG
Reciever	Sanwa
Batteries	Nosram 5600
Motor	PRT 5.5
Spur Gear	98T [X] 95T [ ]
Pinion	19
LH Cell Position	Forward [ ] Backward [X]

Track Conditions

Surface	Carpet
Grip Level	Low/Meduim
Track Condition	

Wheels and Tyres

Rear Wheels	Revlite
Rear Tyre	Mini-pin Yellow
Rear Insert	Schum hard ultra wide
Front Wheels	Revlite
Front Tyre	Min-pin Yellow
Front Insert	Schum hard

Diff Type

			Diff Oil
Front	Ball [X]	Gear [ ]	
Rear	Ball [X]	Gear [ ]	

CAT KI

Additional Settings

Car Weight 1770g

Weights Added

Chassis Alloy [ ] Option [X]

NOTES


-Shock absorber rear behind arms
-Carbon chassis
-Big Bore shocks

Rear Shocks

Oil 55 | Spring 2.5 | Shock Cap Sealed [ ] Vented [ ] Emulsion [ ]

Piston 4

Drilled [ ] | Hole Size mm




Shock Length Full mm

Front Shocks

Oil 55 | Spring 3.5 | Shock Cap Sealed [ ] Vented [ ] Emulsion [ ]

Piston 3

Drilled [ ] | Hole Size mm



Shock Length Full mm

Rear Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Wheelbase Short [ ] Med [ ] Long [X]


Camber at Ride Height -2 Deg


Ride Height 18 mm

Rear Toe-in & Track Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [ ]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [X]
2.50 Difference = 3.25° Toe-in [ ]
3.00 Difference = 3.90° Toe-in [ ]

Rear 2 mm Front 0 mm

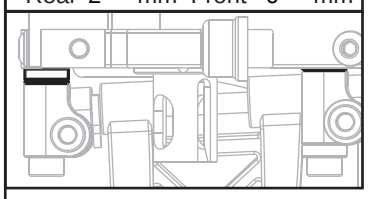

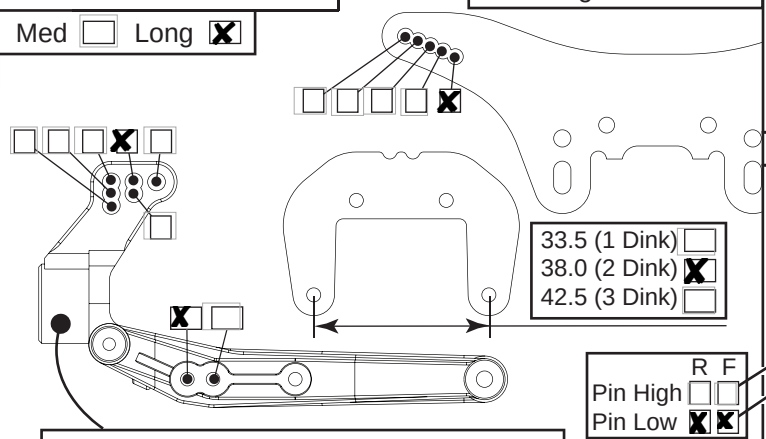

33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

R F
Pin High [ ] [ ]
Pin Low [X] [X]

Rear Hub Carrier Alloy [ ] Std [X]


Alloy Hub Carrier +1° [ ] -1° [ ]

Blocks Moulded [ ] Alloy [X]

Anti-squat Washers

0.00 Difference = 0.00° Toe-in [ ]
0.50 Difference = 0.60° Toe-in [ ]
1.00 Difference = 1.30° Toe-in [X]
1.50 Difference = 1.95° Toe-in [ ]
2.00 Difference = 2.60° Toe-in [ ]
2.50 Difference = 3.25° Toe-in [ ]
3.00 Difference = 3.90° Toe-in [ ]

Rear 2 mm Front 1 mm

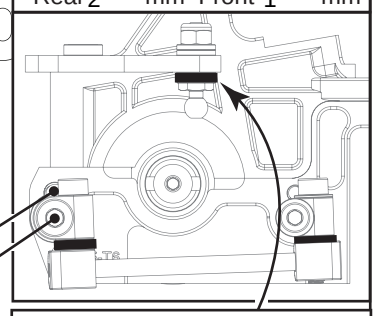

Link Washers 4 mm


Front Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]


Camber at Ride Height 1 Deg


Toe-In 0 Deg

Ride Height 18 mm

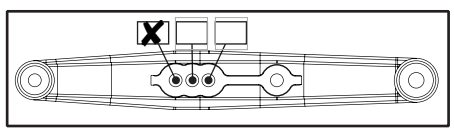


Track Washers mm

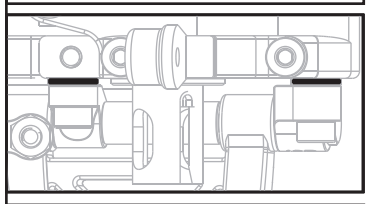

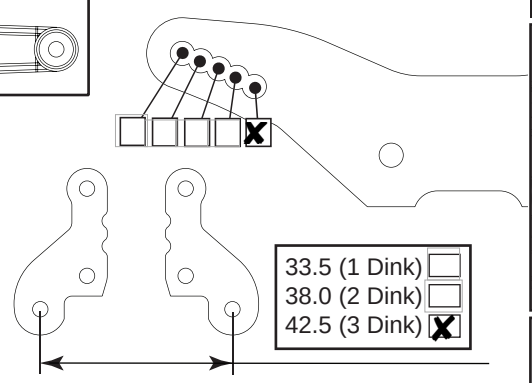


33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [X]

Link Washers 3 mm



Front Rake
10.0 Deg [X] 7.5 Deg [ ]

Washers 3 mm



Front Yoke
Kit
12.5 [ ] 10.0 [ ] 7.5 [X]

Blocks Moulded [ ] Alloy [X]