Driver and Event

Name	Tom Cockerill
Date	Jan '13
Event	EOS Rd 2
Weather	
Result	6th

Electrics and Gearing

E.S.C	Speed Passion Reventon Pro
Servo	GM
Reciever	KO
Batteries	Speed Power 4200
Motor	Speed Passion 6.5R
Spur Gear	98T [X] 95T [ ]
Pinion	18
LH Cell Position	Forward [X] Backward [ ]

Track Conditions

Surface	Carpet/Wood
Grip Level	High
Track Condition	

Wheels and Tyres

Rear Wheels	Schumacher FlexLite
Rear Tyre	Handout
Rear Insert	Schumacher Medium
Front Wheels	Schumacher FlexLite
Front Tyre	Handout
Front Insert	Schumacher Medium

Diff Type

		Diff Oil
Front	Ball [X] Gear [ ]	
Rear	Ball [X] Gear [ ]	

CAT K1

Additional Settings


Car Weight	1688g
Weights Added	
Chassis	Alloy [X] Option [ ]

NOTES

Core Springs

Rear Shocks


Oil 550	Spring Green	Shock Cap	Sealed [ ] Vented [ ] Emulsion [X]
Piston Red			
Drilled [ ]	Hole Size Std mm		



Shock Length 95.5 mm

Front Shocks

Oil 800	Spring Blue	Shock Cap	Sealed [ ] Vented [ ] Emulsion [X]
Piston Black			
Drilled [ ]	Hole Size Std mm		



Shock Length 82.7 mm

Rear Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Wheelbase Short [ ] Med [ ] Long [X]


Camber at Ride Height -1.5 Deg

Ride Height 19 mm


Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [ ]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [X]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear 0.5 mm Front 0.5 mm



Blocks Moulded [X] Alloy [ ]

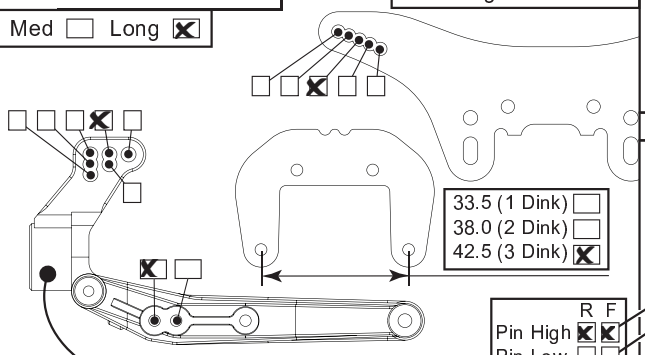

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [X]

	R	F
Pin High	[X]	[X]
Pin Low	[ ]	[ ]


Rear Hub Carrier Alloy [ ] Std [X]

Alloy Hub Carrier +1° [ ] -1° [ ]

Anti-squat Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [X]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [ ]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear mm Front mm



Link Washers 2.0 mm

Front Suspension


Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -1.5 Deg


Ride Height 18 mm

Toe-In +/- 0 Deg


Washers 2.0 mm



Track Washers 1.0 mm




Blocks Moulded [X] Alloy [ ]

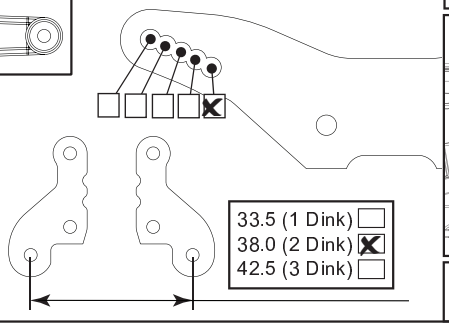


33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

Link Washers 1.0 mm



Front Rake
10.0 Deg [X] 7.5 Deg [ ]



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [X]