Driver and Event

Name	Tom Cockerill
Date	Dec '12
Event	Area 51
Weather	N/A
Result	TQ & Win

Electrics and Gearing

E.S.C	Speed Passion Reventon Pro
Servo	GM
Reciever	KO
Batteries	Speed Power 4200
Motor	Speed Passion 5.5 V3.0
Spur Gear	98T [X] 95T [ ]
Pinion	18
LH Cell Position	Forward [X] Backward [ ]

Track Conditions

Surface	Astroturf
Grip Level	High
Track Condition	Smooth, Indoor

Wheels and Tyres

Rear Wheels	Schumacher FlexLite
Rear Tyre	Schamcher MiniSpike
Rear Insert	Schumacher Medium
Front Wheels	Schumacher FlexLite
Front Tyre	Sch Slim MiniSpike
Front Insert	Schumacher Medium

Diff Type

	Diff Oil
Front Ball [X] Gear [ ]	
Rear Ball [X] Gear [ ]	

Additional Settings


Car Weight	1692g
Weights Added	N/A
Chassis	Alloy [X] Option [ ]

NOTES

Core Springs

Rear Shocks


Oil 550	Spring Black	Shock Cap	Sealed [ ] Vented [ ] Emulsion [X]
Piston Red			
Drilled [ ]	Hole Size Std mm		



Shock Length 95.5 mm

Front Shocks

Oil 700	Spring Blue	Shock Cap	Sealed [ ] Vented [X] Emulsion [ ]
Piston Black			
Drilled [ ]	Hole Size Std mm		



Shock Length 82.65 mm

Rear Suspension

Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Wheelbase Short [ ] Med [ ] Long [X]


Camber at Ride Height -1.0 Deg

Ride Height 18 mm


Rear Toe-in & Track Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [ ]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [X]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear 0.5 mm Front 0.5 mm



Blocks Moulded [X] Alloy [ ]

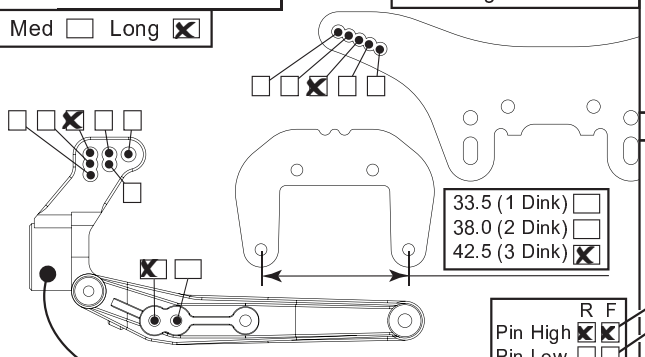

33.5 (1 Dink) [ ]
38.0 (2 Dink) [ ]
42.5 (3 Dink) [X]

	R	F
Pin High	[X]	[X]
Pin Low	[ ]	[ ]


Rear Hub Carrier Alloy [ ] Std [X]

Alloy Hub Carrier +1° [ ] -1° [ ]

Anti-squat Washers

- 0.00 Difference = 0.00° Toe-in [ ]
- 0.50 Difference = 0.60° Toe-in [ ]
- 1.00 Difference = 1.30° Toe-in [ ]
- 1.50 Difference = 1.95° Toe-in [X]
- 2.00 Difference = 2.60° Toe-in [ ]
- 2.50 Difference = 3.25° Toe-in [ ]
- 3.00 Difference = 3.90° Toe-in [ ]

Rear n/a mm Front n/a mm



Link Washers 2.0 mm

Front Suspension


Anti roll bar No [X] 1.00 [ ] 1.20 [ ] 1.40 [ ] 1.60 [ ]

Camber at Ride Height -2.0 Deg


Toe-In +/- 0 Deg

Ride Height 17 mm


Washers 0 mm



Track Washers 1.0 mm




Blocks Moulded [X] Alloy [ ]

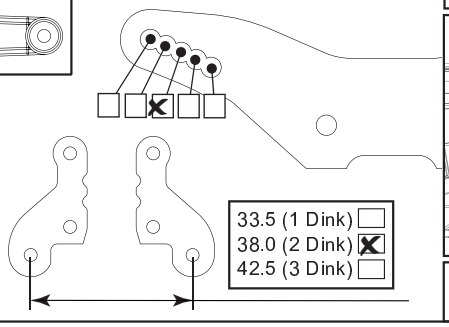


33.5 (1 Dink) [ ]
38.0 (2 Dink) [X]
42.5 (3 Dink) [ ]

Link Washers 1.0 mm



Front Rake
10.0 Deg [ ] 7.5 Deg [X]



Front Yoke
12.5 [ ] (Kit 10.0) [ ] 7.5 [X]