Driver & Event

Name	TEST DRIVER
Date	SEPT 16 Event TESTING
Weather	INDOOR
Result	

Track Conditions

Grip Level	High ☑	Med ☐	Low ☐	
Type	Tight ☐	Open ☐	Mixed ☑	
Surface	Clay ☐	Astro ☐	Grass ☐	
	Mixed ☐	Carpet ☑		
Condition	Smooth ☑	Bumpy ☐		

Diff Type

Ball ☐	Gear ☑	Diff Oil	10,000 cSt
Diff Height	High ☐	Mid ☑	Low ☐

Electrics & Chassis

E.S.C	NOSRAM		
Servo	KO		
Reciever	KO	Lipo	SHORTY LIPO
Front Top Deck	Yes ☐	No ☑	
Shorty LiPo	Front ☐	Middle ☑	Rear ☐
Trans Position	1 ☐	2 ☐	3 ☐ 4 ☑
Chassis	Alloy ☑	Carbon ☐	

Wheels & Tyres

Rr Tyre	MINIPIN PRE-GLUED
Rr Wheel	STD
Rr Insert	STD MEDIUM
Fr Tyre	CUT STAGGER PRE-GLUED
Fr Wheel	STD
Fr Insert	NONE

Motor & Gearing

Motor	6.5	
Rotor Diameter	STD	mm
Timing	STD	Deg
Spur	83	
Pinion	22	

Other settings

Car Weight			g
Wing Gurney Height Front	-4.0		mm
Wing Gurney Height Rear	-8.0		mm
Front Wing ☑	small ☑	big ☐	
Alloy Sidepods			☑
Front Brass Weight			☑
Multi Plate Slipper			☐
Narrow Rear Wheel Hex			☐

Front Shocks

Oil 500 cSt	Spring 4.0 lb/in	Shock Cap	Sealed ☐
		Vented ☐	Aeration ☑
Piston WHITE	Drilled ☐	Hole Size	mm
Internal Limiters 2.0 mm		Small Bore Shocks	☐

Shock Length 22.0 mm



Rear Shocks

Oil 400 cSt	Spring 2.2 lb/in	Shock Cap	Sealed ☐
		Vented ☐	Aeration ☑
Piston BLACK	Drilled ☐	Hole Size	mm
Internal Limiters 1.0 mm		Small Bore Shocks	☐
Shock Postion	Rear Mounted ☐	Front Mounted ☑	

Shock Length 27.3 mm



Front Suspension


Toe	-1.0 Deg
Yoke	0° ☐ 5° ☑ Alloy ☐


Anti Roll Bar: No ☐ 0.9 ☑ 1.1 ☐ 1.2 ☐ 1.3 ☐

C.T.R: Kit ☐ Alloy ☑

Ride Height: 17.0 mm


Camber at Ride Height: -1.0 Deg






Link Washers: 1.0 mm




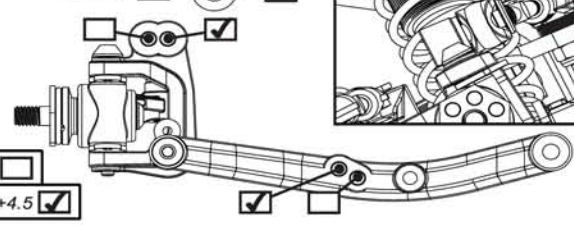



Hub Carrier	Kit ☐ Alloy ☑
Hub Height	High ☐ Middle ☑ Low ☐
Wheelbase	0 ☐ +1.5 ☐ +3.0 ☐ +4.5 ☑

Link Mount: Kit ☐ Alloy ☑




Rear Suspension


Anti Roll Bar: No ☐ 1.0 ☑ 1.2 ☐ 1.4 ☐ 1.6 ☐


Wing Washer: No ☐ Yes ☑

Ride Height	17.0 mm
Camber at Ride Height	-1.0 Deg
Toe In (Kit Blocks)	3° ☑ 2.5° ☐
Toe In (4/1.5° Blocks)	4° ☐ 1.5° ☐

Link Washers: 2.0 mm

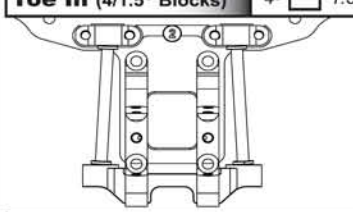




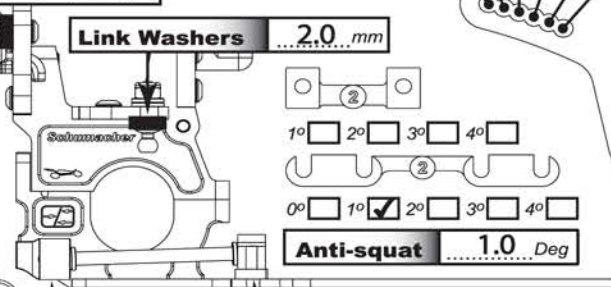


1° ☐ 2° ☐ 3° ☐ 4° ☐


0° ☐ 1° ☑ 2° ☐ 3° ☐ 4° ☐

Anti-squat: 1.0 Deg

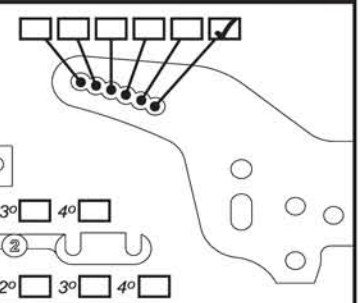

Hub Washers: 2.0 mm






Rear Strap: Kit ☑ Wide Brass 3.5° ☐

Rear Strap: High Pin (With front Riser) ☐ Low Pin (Kit) ☑

Hub Carrier	
Kit	☐
Alloy	+1° ☐ -1° ☐
Brass insert	Hi-Pin ☐ Low-Pin ☑
Wheelbase	Short ☑ Med ☐ Long ☐



Link Mount: Kit ☑ Alloy ☐

Notes