SETUP SHEET Project 4X

DRIVER, TRACK AND RESULTS

DRIVER Default Setup Carpet COUNTRY | **WEATHER** AIR TEMP TRACK TEMP ☐ DRY ☐ INTERMEDIATE ☐ WET

TRACK **SURFACE** ☐ ASPHALT ☑ CARPET **TRACTION** ☐ LOW ☐ MEDIUM ☐ HIGH **COMMENTS**

RACE DATE Sept 14th 2016 QUALY POS. QUALY TIME STARTING POS. FINAL POS.

DRIVE TRAIN

FRONT	REAR
☐ GEAR DIFF cst	☑ GEAR DIFF 2000 cst
☑ SPOOL	

FLEX CONFIGURATION

CHASSIS	STIFFENERS	TOP DECK
☑ STD ☐ FLEX	☑ FRONT ☑ REAR	☑ NONE ☐ mm

HEAVE DAMPER

FRONT	REAR
OIL 2000 cst	OIL 2000 cst
SPRINGS 5.5	SPRINGS 5.5
☐ ☑ ☐	☐ ☑ ☐
N HOLES Ø mm	N HOLES Ø mm

ROLL DAMPER

FRONT	REAR
OIL 3000 cst	OIL 3000 cst
SPRINGS 8.4	SPRINGS 8.4
☐ ☑ ☐	☐ ☑ ☐
N HOLES Ø mm	N HOLES Ø mm

TYRES

FRONT **TYRES** Controlled Tyre ☐ REAR

MAKE AND TYPE	
INSERTS	
ADDITIVE	
ADDITIVE TIMING	

ELECTRONICS

BATTERY
BRAND CAPACITY mAh

MOTOR
BRAND TYPE TIMING


ESC
BRAND TYPE

RATIO CONFIGURATION

	PITCH **SPUR GEAR** TEETH	
	PITCH **PINION** TEETH	
FINAL DRIVE RATIO	ROLL OUT	mm


AERODYNAMIC CONFIGURATION

BODY BRAND
BODY TYPE
BODY POSITION mm

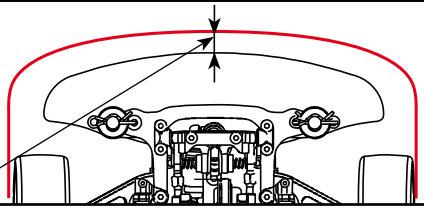

REMARKS

FRONT	REAR
PULLROD LENGTH 15.5 mm	ROLL CENTER SHIMS 3 mm
WHEEL HEX -0.75 mm	
DOWN STOP 2.5 mm	DOWN STOP 2.0 mm
UPPER ARM INSERT	UPPER ARM INSERT
FRONT CAMBER R -2 ° L -2 °	REAR CAMBER R -2 ° L -2 °
RIDE HEIGHT 5.0 mm WITH TYRE Ø mm	RIDE HEIGHT 5.5 mm WITH TYRE Ø mm
CASTER 3 mm	SPACERS 6 mm
FRONT TOE -0.5 °	REAR TOE 3.0 °
OUTER ACKERMANN	INNER ACKERMANN
	REAR REACTIVE SYSTEM SHIMS 0 mm SHIMS 2 mm
WHEEL BASE ☐ 0 ☐ 1 ☑ 2 ☐ 3 ☐ 4	WHEEL BASE ☐ 0 ☐ 1 ☐ 2 ☑ 3 ☐ 4
SHIMS 2 mm	
ROLL CENTER BOTTOM INSERTS MID LOW ● MID HIGH ○ HIGH	ROLL CENTER BOTTOM INSERTS MID LOW ● MID HIGH ○ HIGH

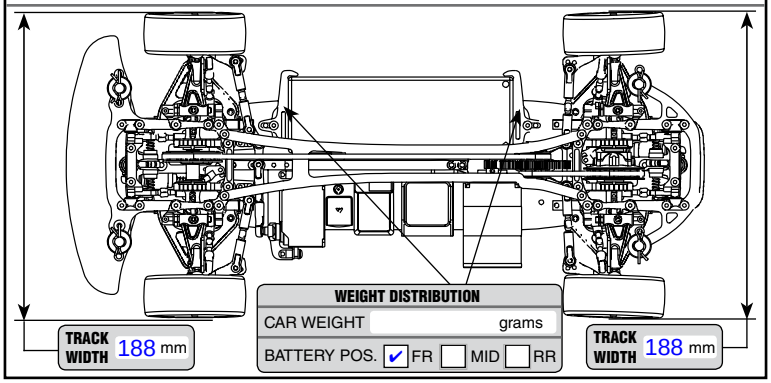

WEIGHT DISTRIBUTION
CAR WEIGHT grams
BATTERY POS. ☑ FR ☐ MID ☐ RR

TRACK WIDTH 188 mm | TRACK WIDTH 188 mm