SET UP

Serpent 748 NATRIX electric powered

RACE	DEFAULT	DATE	
TRACK		QUALIFYING POSITION	
DRIVER		QUALIFYING TIME	
TRACTION: LOW ☐ MEDIUM ☐ HIGH ☐		STARTING POSITION	
TRACK TEMP		AIR TEMP	FINAL POSITION

FRONT DRIVE TRAIN REAR

FRONT	REAR
☑ GEAR DIFF 1.000.000 cst	☑ GEAR DIFF 100.000 cst
☐ ONE WAY	☐ SOLID
☐ SPOOL	

SHOCK ABSORBERS

FRONT	REAR
OIL 1000 cst	OIL 1000 cst
SPRINGS RED	SPRINGS RED

○ Open ● Closed

FRONT ANTI-ROLL BARS REAR

FRONT				REAR				
☐ 1.8	☐ 2.2	☑ 2.5	☐ 2.8	☐ 1.6	☑ 1.8	☐ 2.0	☐ 2.2	☐ 2.5

FRONT TYRES REAR

RIGHT	LEFT	Controlled Tyre ☐	RIGHT	LEFT
		MAKE		
		SHORE		
		DIAMETER		
		5-MIN WEAR		

RATIO CONFIGURATION

SPUR GEAR

PITCH 48 TEETH 75

PINION

PITCH 48 TEETH

FINAL DRIVE RATIO | ROLL OUT mm

ELECTRONICS

BATTERY: 2S ☐ 3S ☐ 4S ☐

BRAND CAPACITY

MOTOR

BRAND TYPE TIMING

ESC

BRAND TYPE

CONFIGURATION

AERODYNAMIC CONFIGURATION

BODY


BRAND TYPE

BODY POSITION

mm

BUMPER HOLES CUT

☐ YES ☑ NO

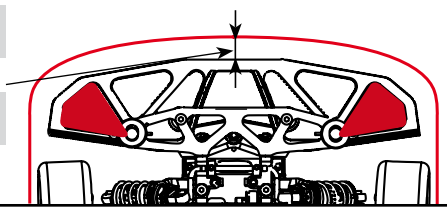

REMARKS

