AWESOMATIX A12X

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

SETUP SHEET
210426

NAME	Josh Flanagan	DATE	18/10/2026
RACE	LMGT3 Super Cup Round 2	TEMPERATURE AIR / TRACK	0 °C / 0 °C
TRACK	Stoke	SURFACE	ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
COUNTRY	UK	TRACK CONDITIONS	BUMPY ☐ FLAT ☑ TECHNICAL ☐ MIXED ☑ FAST ☐
CLASS	LMGT3	TRACTION	LOW ☑ MEDIUM ☐ HIGH ☐

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER ____ °

SUSPENSION PLATE
C1205-X ☐ C1205AFS ☑
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER ____


SERVO PLATE
C1201-X ☐ C1201AFS ☑
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER ____

STEERING BLOCKS
AT1204-X ☑ OTHER ____
AT1204-ZTX ☐
BUMPSTEER SHIMS 2 mm

FRONT BUMPER
P1215 ☐
OTHER Sagami GT
SPACER 0 mm

REAR SPRING
SPR12XR-C0.8 ☑ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☐
SPR12XR-C1.2 ☐ OTHER ____

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT 1 mm
REAR 1.5 mm

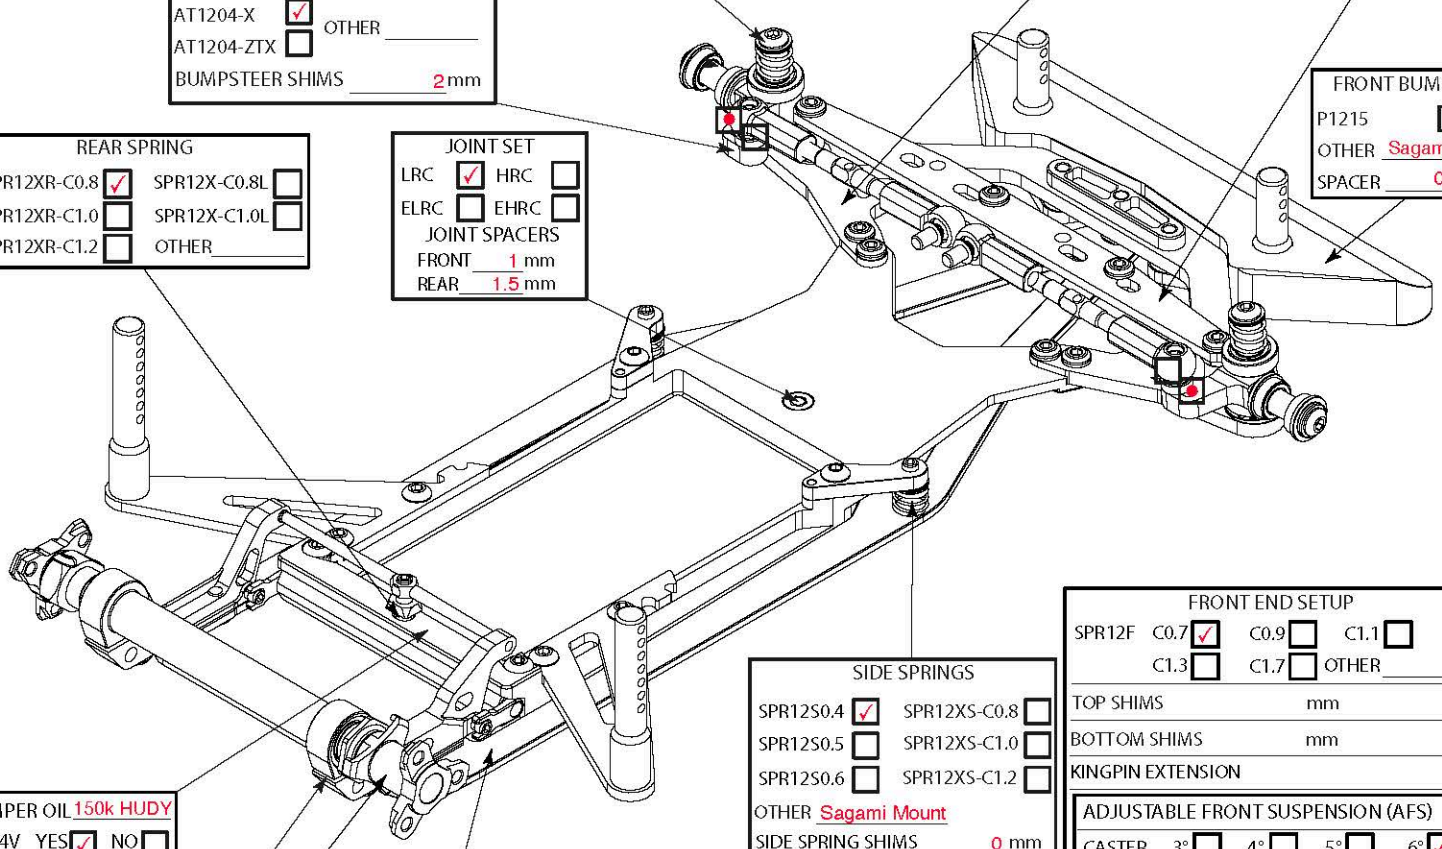

SIDE SPRINGS
SPR12S0.4 ☑ SPR12XS-C0.8 ☐
SPR12S0.5 ☐ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER Sagami Mount
SIDE SPRING SHIMS 0 mm
SIDE SPRING GAP 0 mm

FRONT END SETUP
SPR12F C0.7 ☑ C0.9 ☐ C1.1 ☐
C1.3 ☐ C1.7 ☐ OTHER ____

TOP SHIMS	mm	pcs
BOTTOM SHIMS	mm	pcs
KINGPIN EXTENSION	mm	

ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.25 ° DROOP 1 mm
SPRING PRELOAD mm

O-RINGS 0pcs ☐ 1pcs ☑ 2pcs ☐
O-RING TYPE Kit
GREASE MXLR 15K

DAMPER OIL 150k HUDY
OR14V YES ☑ NO ☐

RIDE HEIGHT SPACERS 0.5 mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND ____
STEEL ☐ OIL ____

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☑
AM1204WC ☐
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.4 mm	FRONT DROOP (FD)	1 mm
REAR RIDE HEIGH (RRH)	3.6 mm	REAR DOWNSTOP (RD)	mm
GAP UNDER DAMPER (GUD)	1.8 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	mm	FRONT	0.5 inside mm
SPRING ROD HEIGHT (SRH)	2.6 mm	REAR	172 mm

BATTERY	ABM 4400	
BATTERY PLUGS	FRONT ☑	BACK ☐
SERVO POSITION	LEFT ☐	RIGHT ☑
ESC POSITION	LEFT ☑	RIGHT ☐

SERVO	Sanwa
SERVO SAVER	HUDY
SHIMS ON SERVO SAVER	2 mm
TOE OUT	1.5 °
STEER. TRAVEL IN	28 ° OUT °

TIRES	FRONT	REAR
BRAND	ULTI	ULTI
TYPE	Blue Stripe 38SH	Blue Stripe 38SH
DIAMETER	41 mm	41.4 mm
GLUED SIDEWALLS	FRONT ☐	REAR ☐

ADDITIVE Spider Blue
FRONT 12 mm REAR
TIME 5 min TIME 45 min

MOTOR	Team Powers V4 25.5	TOTAL WEIGHT	733g
SPUR 1 PINION 1	ROLLOUT 130,0€	F/R WEIGHT DISTRIBUTION	
ESC	Team Powers Mini Radon	RECEIVER	SMD FH5
ESC SETTINGS		RADIO	Sanwa M17S
BODY	Zoo Racing Zerda	REAR BODY HEIGHT (SIDE DAMS)	mm
BEST LAPTIME	10.70	QUALIF / FINAL POSITION	1 / 1

COMMENTS:

Sagami Fab Spring mounts
Damper 170 on SkyRC Diff Checker
Kit O Ring in Front hubs no shims fitted
0.8 rear up travel