TRF416 TAMIYA RACING FACTORY

CHASSIS KIT


1/10 SCALE R/C 4WD RACING CAR
TRF416 CHASSIS KIT

SETTING SHEET

Name	Date	Air Temp.	Humidity
Weisskopf Lars	31.07-02.08.09	18-28°	44-60%


Track	Track Condition	Track Temp
Luxenburg EM	med.grip	25-35°

[FRONT]




Upper Arm Pos.

Upper Arm Spacer
6.0 mm

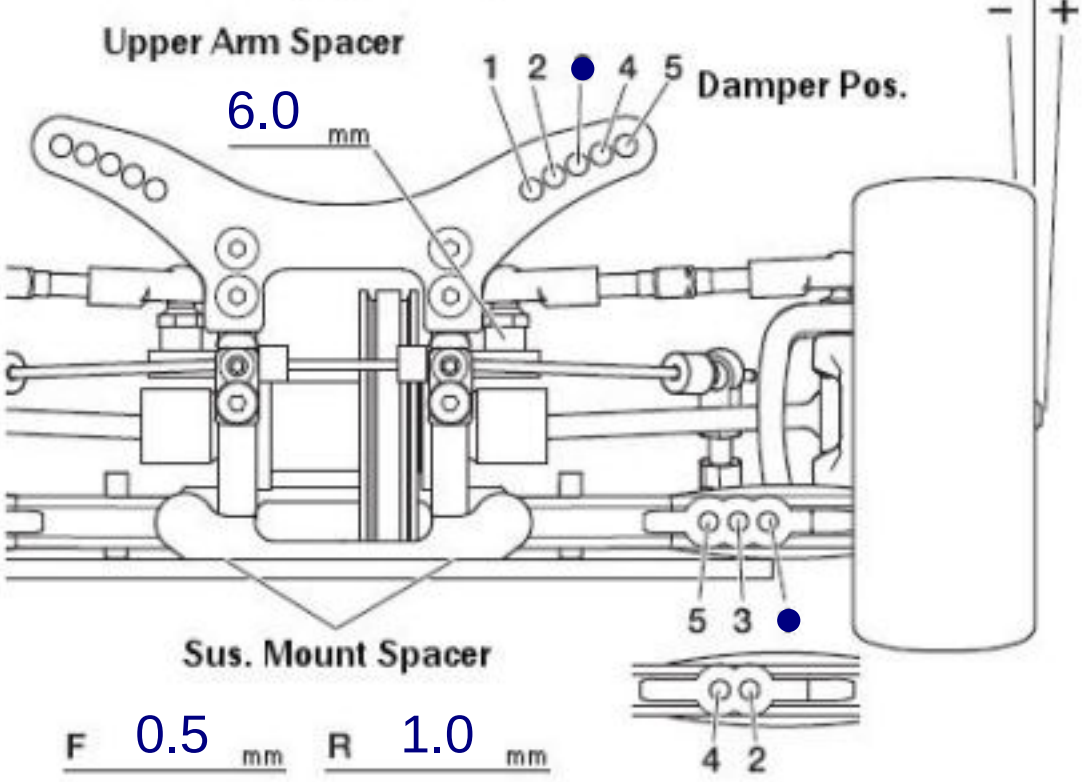

F 0.5 mm R 1.0 mm


[REAR]



Upper Arm Pos.


Damper Pos.

Upper Arm Spacer
4.5 mm

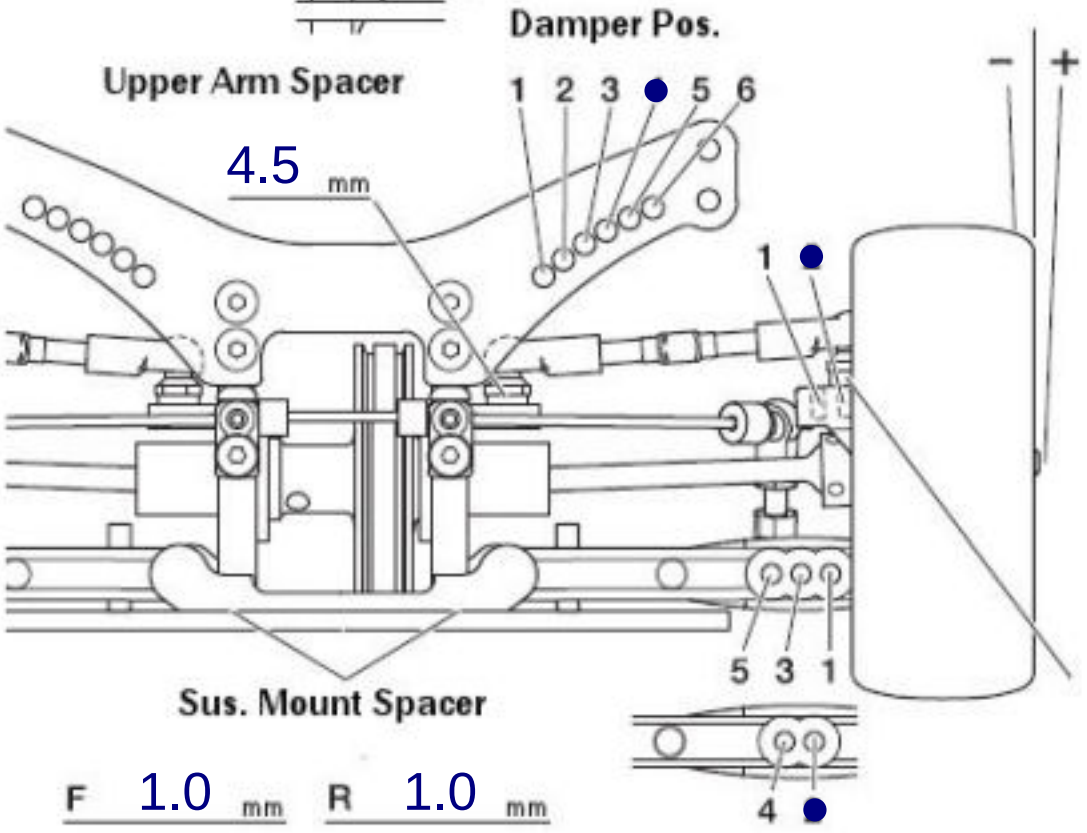

F 1.0 mm R 1.0 mm

Castor Blocks	2° [X]
Camber	-1.5 °
Ride Height	mm
Droop	6.0 mm
Front Axle	One-way / Diff / [X] Spool
Roll bar	None / S / [X] M / H
Wheel Spacer	0.5 mm
Notes	Cam holder high

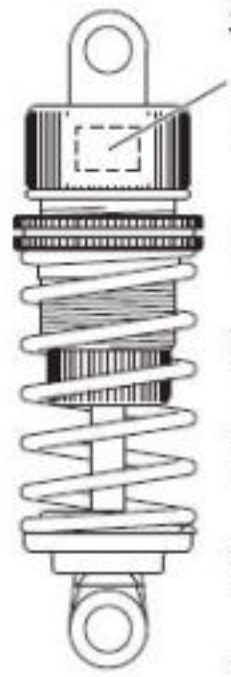

Shock Bushing	- Piece(s)
Piston	3 Holes
Oil	40wt Weight
Spring	HPI silver
Shock Length	61.5 mm
Wheel Hex	4.0 mm
Rebound	3.0 mm %

Rear Hub	0 °
Camber	-2.0 °
Ride Height	5.5 mm
Droop	5.0 mm
Roll bar	None [X] / M / H
Wheel Spacer	0.5 mm
Upper Arm Spacer	3.5 mm




Shock Bushing	- Piece(s)
Piston	3 Holes
Oil	40wt Weight
Spring	HPI silver
Shock Length	61.5 mm
Wheel Hex	4.0 mm
Rebound	3.0mm %

416 upper deck / No steering center mount

Toe Angle	F Sus. Mount	R Sus. Mount	Motor
+0.5 °	F 1C R 1C	F 1X R 1E	SP 3.5 MR

Spur	Pinion
81 T	21 T

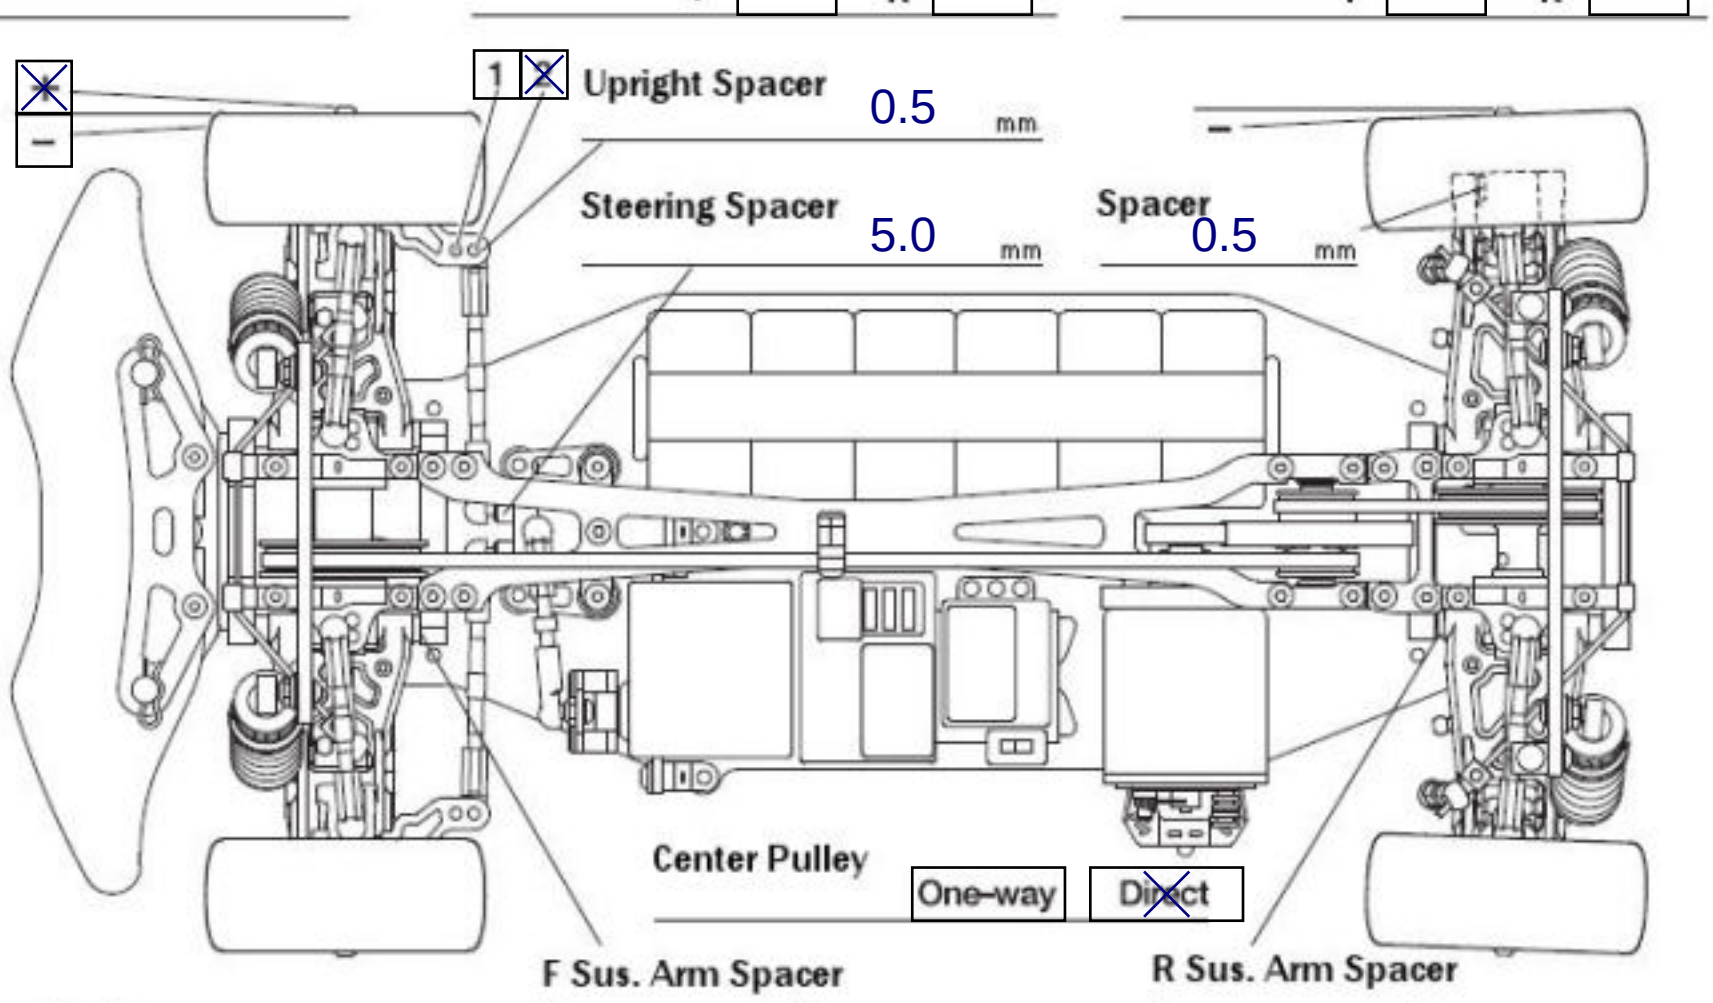

F Sus. Arm Spacer
F 2.5 mm R 2.0 mm

R Sus. Arm Spacer
F 3.0 mm R 1.5 mm

Lower Deck Orig 2.25 mm

Battery	LRP VTEC 4600 HV2 FC
Body	PF Mazda Speed
Wing	orig.
Tire	LRP X 30 (additive MR)
Wheel	compl.
Insert	compl.
Best Lap	19.3 sek / ESC 2.5.1.0