
TRF419 WORLD CHAMPION TEAM — SETTING SHEET

TAMIYA RACING FACTORY


Name Naoto Matsukura Date 27.08.201525-30 Air temp. °C Track temp. °C Humidity 90%

Track Bee Tops Track condition: Asphalt / Carpet ✓ | Bumpy / Smooth | Fast / Mixed / Technical

《Front》

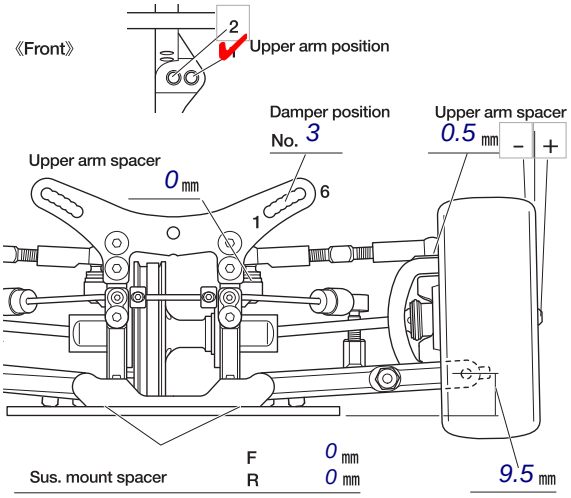


Front axle	4 °
Camber angle	-1.5 °
Ground clearance	5 mm
Rebound stroke	mm
Stabilizer	1.3mm
Wheel spacer	0 mm
Front drive	Spool
Differential oil	# %




Damper type	TRF419
Piston	3 hole(s)
Oil	40 #
Spring	X-Gear Red

Memo

《Rear》

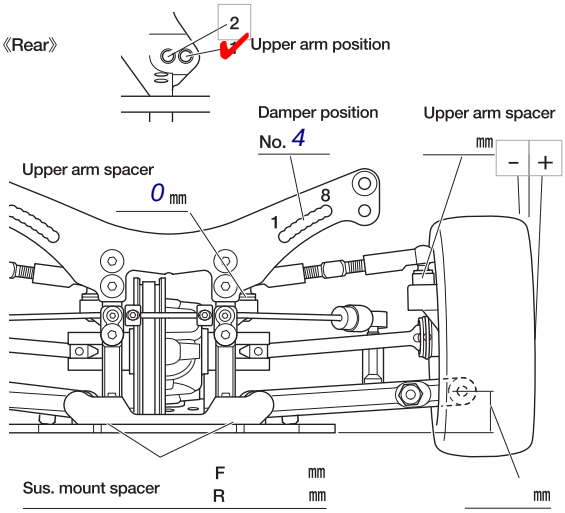


Rear upright	416 / 418 ✓
Camber angle	-1.5 °
Ground clearance	5.2 mm
Rebound stroke	mm
Stabilizer	1.2mm
Wheel spacer	0 mm
Rear drive	Gear diff
Differential oil	#2000 (1.6g)



Damper type	TRF419
Piston	3 hole(s)
Oil	40 #
Spring	X-Gear Red

Memo

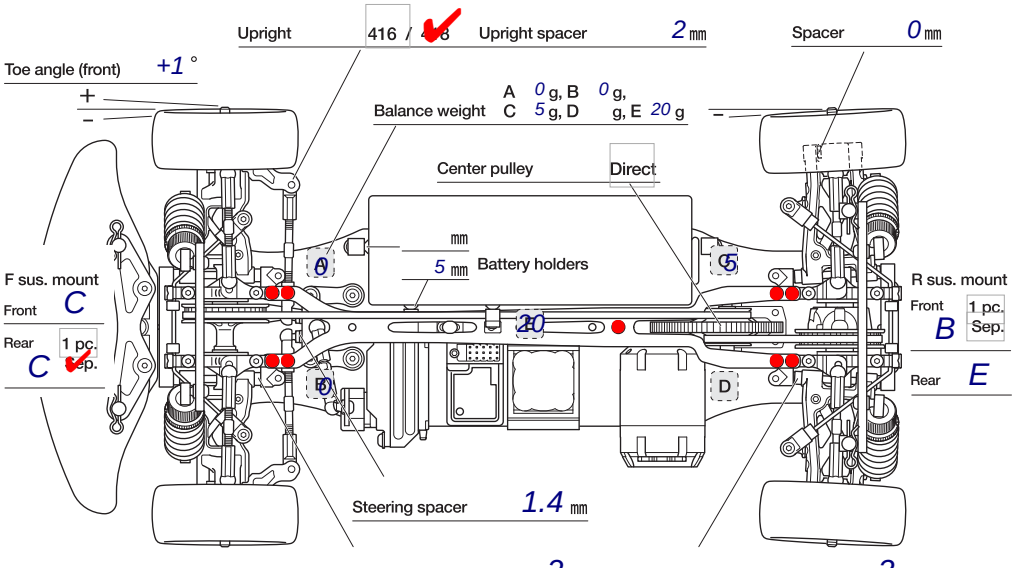

Motor	Muchmore 4.5
Spur / Pinion / Pitch	116 T / 29 T
Battery	Muchmore 6000mAh / g
Body	Protoform LTC-R
Wing	
Tire	Rush 36 (Handout)
Wheel	Handout
Tire insert	Handout
Best lap	

Arn0