
TRF 419 WORLD CHAMPION TEAM — SETTING SHEET

TAMIYA RACING FACTORY


Name Harald H. | Date 26.03.2016 | Air temp. °C | Track temp. 19°C | Humidity %

Track MARS Alterlaa | Track condition: Asphalt ✓ Carpet | Bumpy Smooth ✓ | Fast Mixed Technical ✓ | high grip -Test Wide front End Block

《Front》

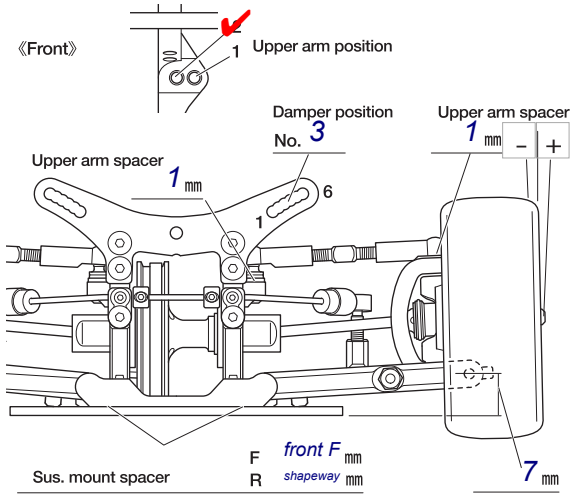

Front axle	6 °
Camber angle	1,5 °
Ground clearance	5 mm
Rebound stroke	half urethan 6 mm
Stabilizer	kit
Wheel spacer	0,5 mm
Front drive	spool
Differential oil	# %




Damper type	short 42273
Piston	kit hole(s)
Oil	serpent 40 #
Spring	Yok blue


Low profile towers- fibre lyte for 25mm

Memo www.glattbahner.at

《Rear》

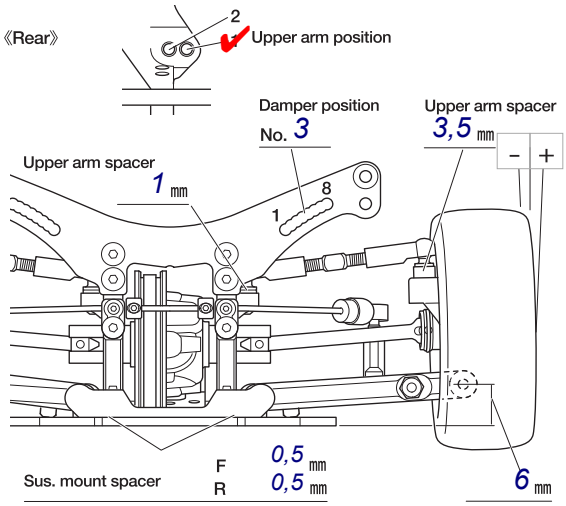


Rear upright	416 / 418 ✓
Camber angle	2 °
Ground clearance	5 mm
Rebound stroke	3 mm
Stabilizer	kit
Wheel spacer	0,5 mm
Rear drive	Diff Xray-oring+0,2washer
Differential oil	3000



Damper type	short 42273
Piston	kit hole(s)
Oil	serpent40 #
Spring	Yok blue

carbon steering bridge; Motor screws 2x2; inner mount of 416 upright; downstop under arm

Memo

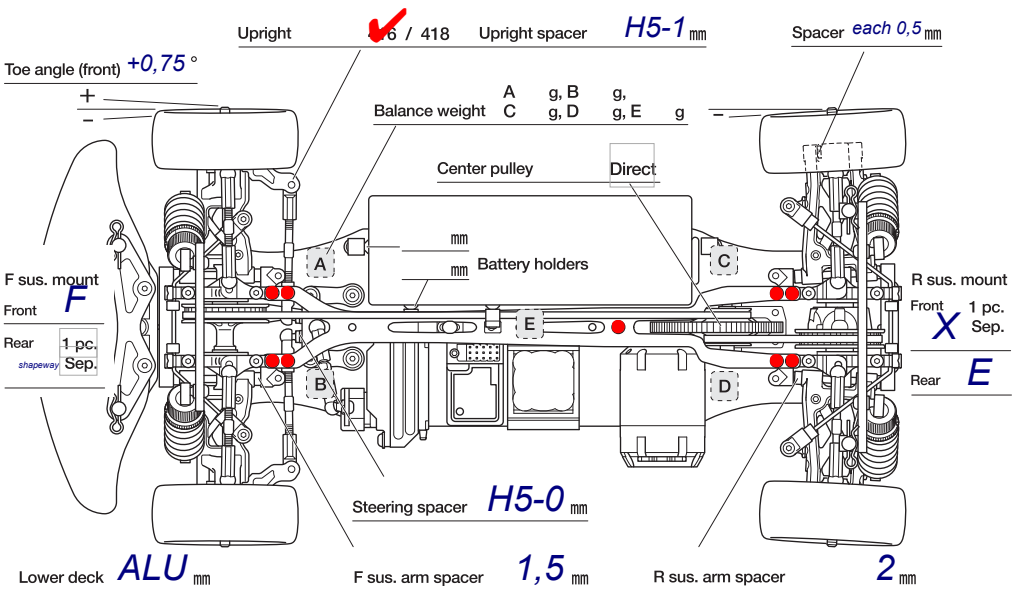

Motor	LRP 13,5T
Spur / Pinion / Pitch	111 T / 41 T
Battery	GM 7600V-MAXX / g
Body	Bitty Design MC10
Wing	std
Tire	LRP CPX V2 ware down
Wheel	MARKA bearings
Tire insert	FibreLite; Shapeways
Best lap	RC KleinKram

Arn0