TEKNO RC — Setup Sheet

SCT 410

Name: Date: Event:

Track Conditions: Outdoor ☐ Indoor ☒ Wet ☒ Dry ☐ High Bite ☐ Low Bite ☒

Rough ☐ Smooth ☒ Hard Packed ☒ Loose/Loamy ☐ Blue Groove ☐

Bumpsteer/Ackerman/Servo Saver:













Front End:

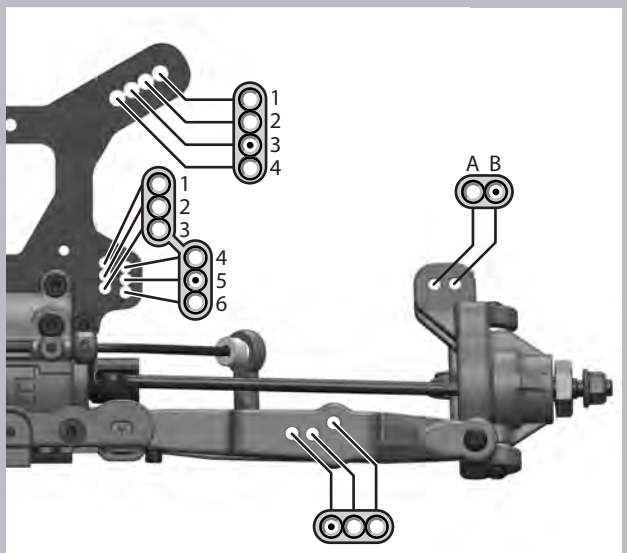

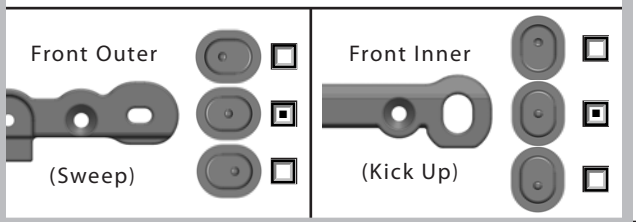

Rear End:

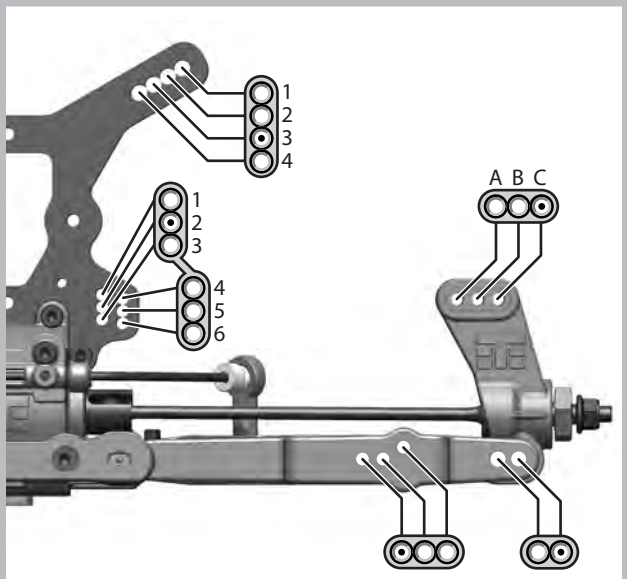

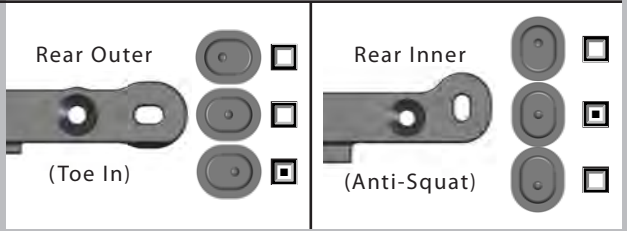



Suspension:

	FRONT	REAR
RIDE HEIGHT	23	21
CAMBER	-1	-2
TOE (in/out)	1 out	3.5 in
SWAY BAR	2.3	2.4
SHOCK LENGTH (DROOP)	full	full


Body/Mounts:

BODY MAKE	

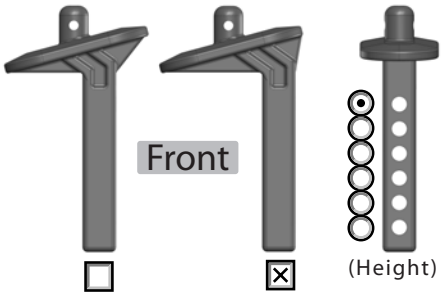

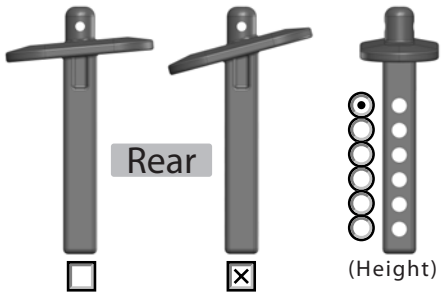

Wheelbase:

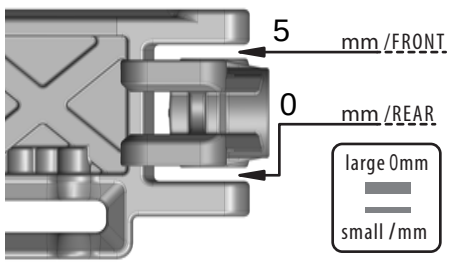

Shocks:

	FRONT	REAR
OIL	Losi 32.5	Losi 25
PISTON	Xray 6x1.3	Xray 6x1.3
SPRING	Tekno pink	Tekno orange
REBOUND	0 %	0 %
STD/EMUL/VENT	emul	emul

Tires / Wheels:

	FRONT	REAR
BRAND/TREAD		
COMPOUND		
INSERT		
WHEEL		

NOTES:

Differential Oil:

FRONT	CENTER	REAR
5	7	3

Electronics:

ESC:	Novak Activ8
Battery:	Thunder Power 5300
Motor:	Ballistic 4.5t 550 can
Radio:	4PKR-S
Servo:	Savox 1258

Drivetrain:

SPUR GEAR	Metal ☐	Composite ☒	
Traktion Drive ☐	Elektri-Clutch ☐	Pinion ☒	
PINION SIZE	15	(teeth)	
Mechanical Brakes ☐	Motor Brakes ☒		

Chassis Braces:

Front ☒ Middle ☒ Rear ☒

(front brace is always recommended)

Notes: