
XPRESS EXECUTE XQ10F — SET-UP-SHEET

Driver: J.Weber | Date: 30.10.21 | Temp. Track: | Temp. Air: | Humidity:

Track: RC Land Heilbronn | Country: Germany | Best Lap: 11,052 | Result: | Comments: ETS Carpet

Composition: ASPHALT (INDOOR / OUTDOOR) CARPET ✓ | Traction: LOW MEDIUM ✓ HIGH | Surface: BUMPY SMOOTH ✓ | Layout: TIGHT MIXED ✓ OPEN

Front

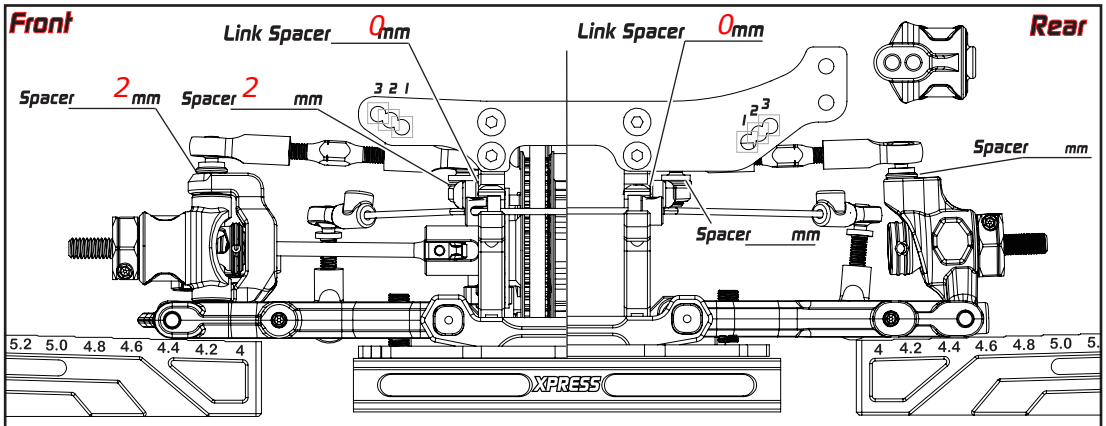


Camber Link	✓	
C-Hub	☐ M ☑ H	
Steering Block	☐ M ☑ H	
Suspension Arm	☐ M ☑ H	
Hex Offset	5 mm	mm
Camber	-1 °	°
Ride Height	5.0 mm	mm
DownStop	6 mm	mm
Sway Bar	1.3 mm	mm


Rear

Camber Link	✓
Rear Hub	☐ M ☐ H
Suspension Arm	☐ M ☐ H


Optional — On-Power Control System

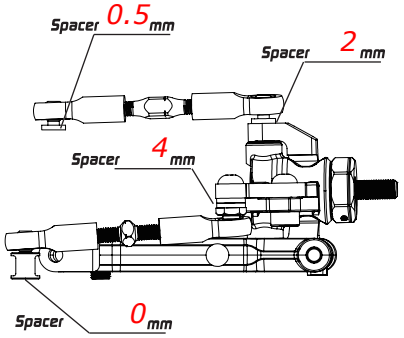

Hex Offset	5 mm
Camber	-1 °
Ride Height	5.2 mm
DownStop	5.5 mm
Sway Bar	1.3 mm
Steering Block	☐ M ☑ H
Suspension Arm	☐ M ☑ H

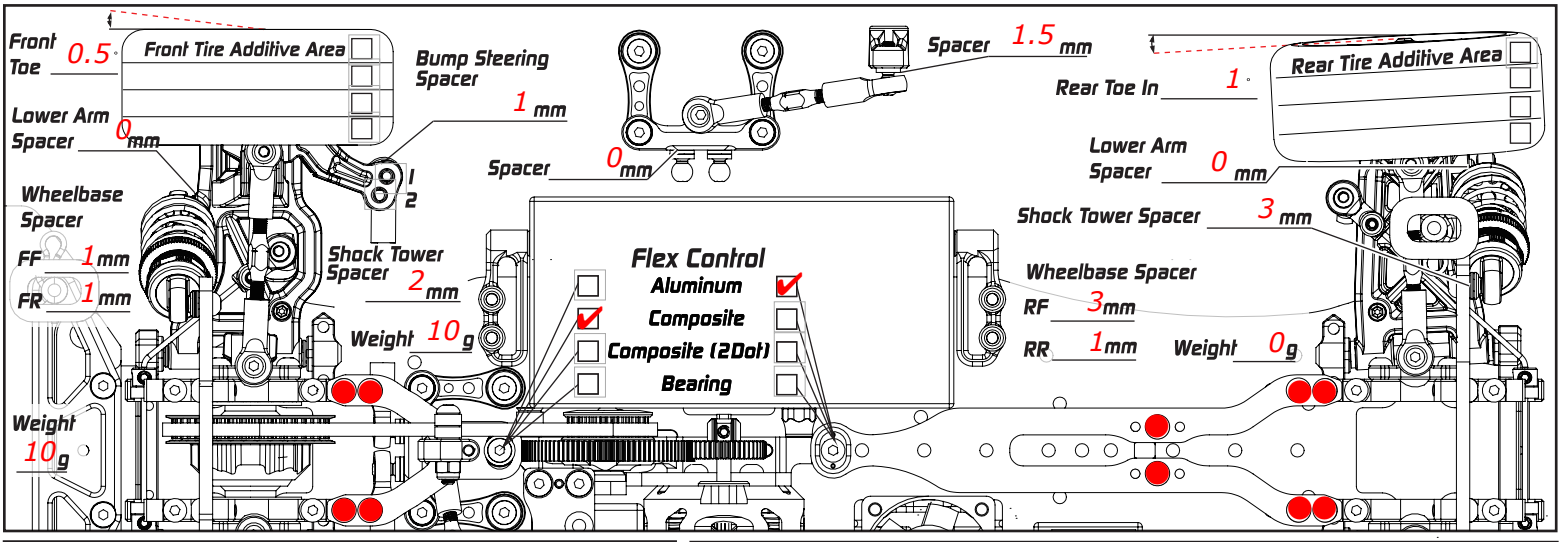


Suspension Mount Setup

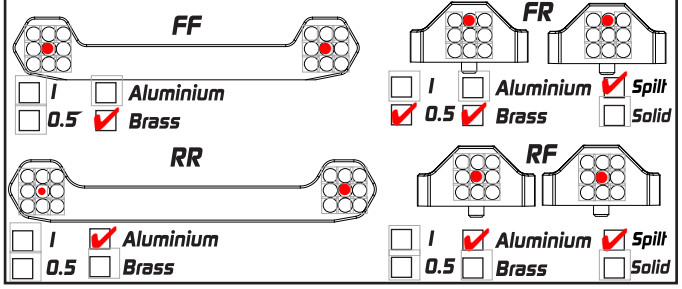

	FF	FR	RR	RF
I	☐ Aluminium	☐ Aluminium ☑ Spilt	☑ Aluminium	☑ Aluminium ☑ Spilt
0.5	☑ Brass	☑ Brass ☐ Solid	☐ Brass	☐ Brass ☐ Solid

Flex Control

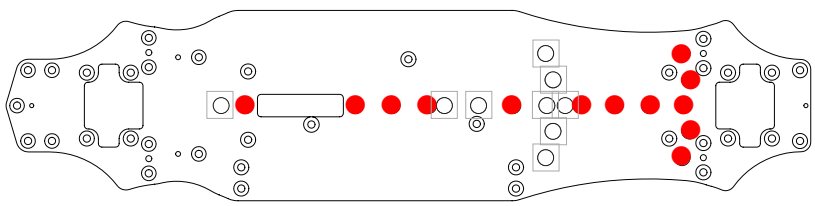

Front Under Chassis Stiffener	☐ None	
	☐ Graphite	☑ Graphite Chassis
	☑ Brass	☐ Aluminum Chassis
Rear Under Chassis Stiffener	☐ None	
	☑ Graphite	
	☐ Brass	

Damper Setup

	Front	Rear
Spring	Mugen 6.25	Xray 3.0
Oil	450 cst	350 cst
Rebound	-	-
Piston	#4	#4
Length		
Foam Insert	☐	☐
Hole In Cap	☐	☐

Transmission Setup

Transmission ☐ Gear Diff ☐ Spool

Oil: 200k

Weight: 1.3 g

Position: low



Others

Servo	MKS	Tires	Ride belted
Esc	HW	Additive	MR33 V4 10min
Motor	HW 17.5	Body	Zoo Gorilla
Spur	64 P/ 96 T	Rear Wing	std
Pinon	64 P/ 36 T	FDR	5.0:1

- Two additional posts in the rear between Topdeck and Chassis
- T-Brace used - Brass weight under front differential
- X-Square LCG Kit used. Front 2mm shim, rear 3mm shim, front cfk brace installed

Arno - PetitRC