
YZ-2 DT SETTING SHEET Ver.01

DRIVER: Team setup | DATE: 2016/03/27

CIRCUIT: RCManiax ARENA

● INDOOR ○ OUTDOOR
● WET ○ DRY ○ DUSTY ○ OTHER
● LOW TRACTION ○ MED TRACTION ○ HIGH TRACTION
● SMOOTH ○ BUMPY ○ BIUE GROOVE ○ ASTROTURF
○ CARPET ○ WOOD


FRONT

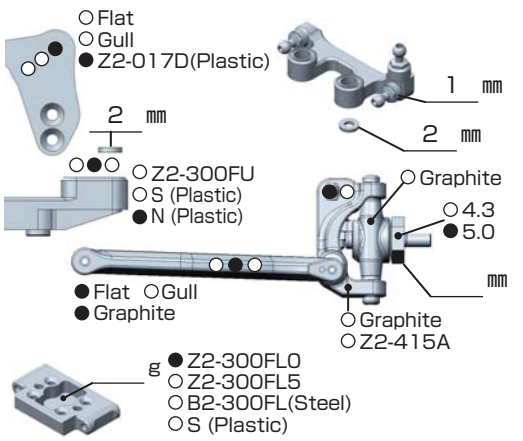


◆CAMBER ● ↔ ○ 1 °

◆TOE ○ IN ● OUT 0.5 °

◆RIDE HEIGHT 23 mm




○ ____ mm

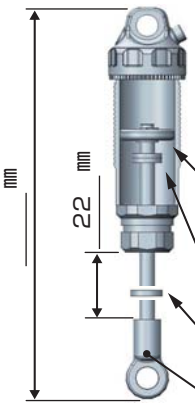


SPRING
○ YELLOW (YS-A875)
● RED (YS-A850)

OIL
AE #30
○ #1 ○ #2 ○ #3
● 1.6㎜×2(BM-S162)
● ○
○
mm x
mm x
○ SD-008RC


REAR

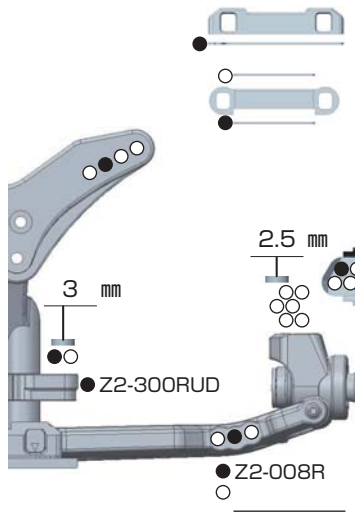

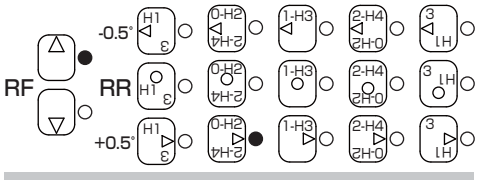


◆CAMBER ● ↔ ○ 2 °

◆RIDE HEIGHT 23 mm

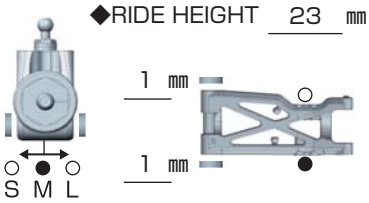

○ ____ mm

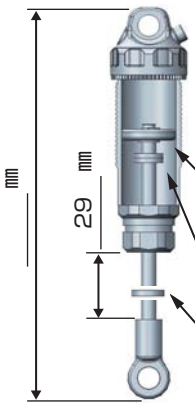

SPRING
● GREEN (YS-A1200)
○ ____

OIL
AE #27.5
○ #1 ○ #2 ○ #3
● 1.4㎜×3(BM-S143)
● ○
○
mm x
mm x

DRIVE




MOTOR ⇨ Racing Performer M2 7.5T Rotor mm
GEAR ⇨ Spur 80 T ／ Pinion 22 T : 2.6
BATTERY ⇨ Racing Performer Ultra Li-po 7.4V 5000mAh (Shorty)
ESC ● Racing Performer X Series
○ ____

Battery placement



○ 5㎜ ×___
● 10㎜ ×2
● 20㎜ ×1
● 5㎜ ×1
○ 10㎜ ×___
○ 20㎜ ×___

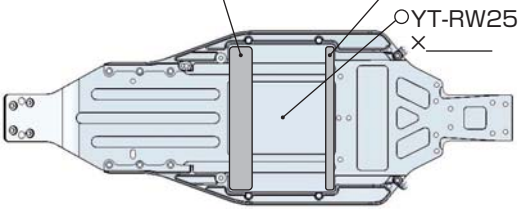


TIRE

FRONT
TIRE ⇨ Panther
INSERTS ⇨ BM-T16
WHEELS ⇨ B2-821HY

REAR
TIRE ⇨ Panther
INSERTS ⇨ BM-T16
WHEELS ⇨ B-827

OTHER





○ ____

COMMENT

Z2-TSSD Z2-TBSD Z2-S2SD Z2-S2LD Z2-670VP
B2-S821A
PLフロントウイング使用
モーターとギヤボックスの間に10g