RIO 2015 ATS ACTIVE TOE SYSTEM SET-UP SHEET
1/10 190mm Electric Touring Car

ARC

RACE	AARC
TRACK	AARC
NAME	CESAR SALVADORI
CITY / COUNTRY	ST. ANDRÉ - SP
DATE	31/08/2015

TEMPERATURE	AIR 3	TRACK

QUALIFYING POSITION	BEST LAPTIME	FINAL POSITION	RACE LENGTH
4	16,5 SEC	1	5 MIN

TRACK CONDITION: ☐ TECHNICAL ☐ CARPET ☑ MIXED ☑ ASPHALT ☑ FAST

TRACTION: ☐ LOW ☐ MEDIUM ☑ HIGH


TRANSMISSION

FRONT	REAR
GEAR DIFF: ☑ RIDE PUTTY 45 CST	GEAR DIFF: ☑ 5000 CST
☐ ONE WAY ☐ SPOOL	Number of Gears: ☐ 2 ☑ 4

MOTOR	LRP 10.5 STOCK	ESC	LRP FLOW
PINION DP	39 T	SPUR GEAR DP	96 T
FINAL DRIVE RATIO (Internal Ratio: 2.0)	4.92		

FRONT			REAR
OIL: 450 CST	☐ 3 HOLE ☑ 4 HOLE	SHOCK PISTON — HOLE SIZE: ☑ 1.1 mm ☐ mm	☐ 3 HOLE ☑ 4 HOLE
SPRING: BLUE			OIL: 450 CST SPRING: BLUE

SOLARIS 35	TIRES	SOLARIS 35
	RIM	
	INSERTS	
PROTEK RED	ADDITIVE	PROTEK RED

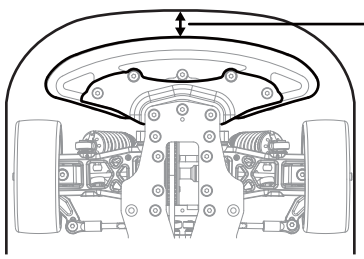

Bumper: ☑ Standard ☐ Cut


BODY MOUNT DISTANCE: mm

BODY	BLITZ GSF	WING	BLITZ 65035

ATS SETUP

ATS Upright Shims: 0 mm

ATS Base Shims: 2 mm

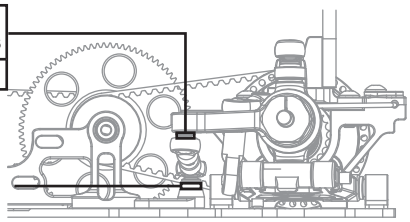

NOTE *Alteration by Arn0 at PetitRC.com*

HARD SUSPENSION PARTS
2mm BUMP STEERING
30 GRAMS BALLAST BELOW STEERING SYSTEM

LRP FLOW V5.4 FIRMWARE 0-1-0-10-0-0-1
LRP 5800 STOCKSPEC BATTERY

