RIO 2015 ATS ACTIVE TOE SYSTEM SET-UP SHEET
1/10 190mm Electric Touring Car

ARC

RACE	TITC 2015
TRACK	RC Addict
NAME	Jilles Groskamp
CITY / COUNTRY	
DATE	2015.02.20

TEMPERATURE	AIR	TRACK

QUALIFYING POSITION	BEST LAPTIME SEC	FINAL POSITION	RACE LENGTH MIN

TRACK CONDITION: ☐ TECHNICAL ☐ CARPET ☑ ASPHALT ☐ MIXED ☑ FAST

TRACTION: ☐ LOW ☑ MEDIUM ☐ HIGH

TRANSMISSION


FRONT	REAR
GEAR DIFF ☐ CST	GEAR DIFF ☐ 7000 CST
☐ ONE WAY	Number of Gears
☑ SPOOL	☐ 2 ☑ 4

MOTOR		ESC	
PINION DP	1 T	SPUR GEAR DP	T
FINAL DRIVE RATIO (Internal Ratio: 2.0)	0.00		

FRONT	REAR
OIL 400 CST	OIL 400 CST
☐ 3 HOLE ☐ 4 HOLE	☐ 3 HOLE ☐ 4 HOLE
SPRING HB Silver	SPRING HB Silver

SHOCK PISTON — HOLE SIZE: 1.1 mm; mm

26027 V2	TIRES	26027 V2	
	RIM		
	INSERTS		
	ADDITIVE		

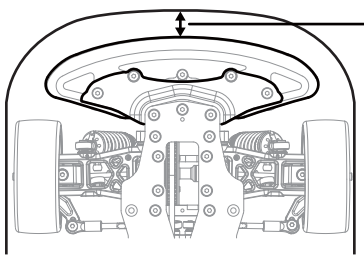

Bumper: ☐ Standard ☐ Cut


BODY MOUNT DISTANCE: mm

BODY		WING	

ATS SETUP


ATS Upright Shims: mm


ATS Base Shims: mm

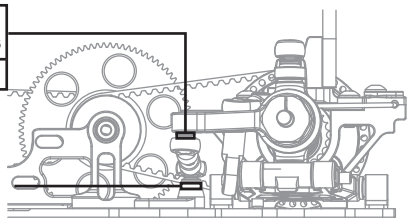


NOTE


Alteration by Arn0 at PetitRC.com

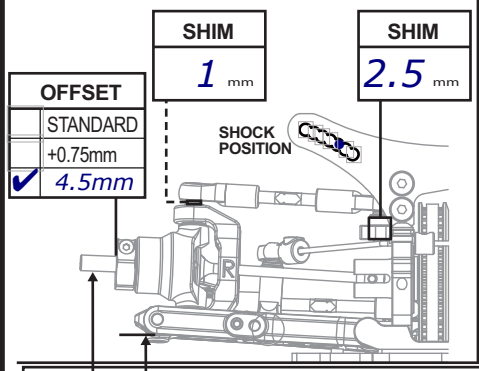

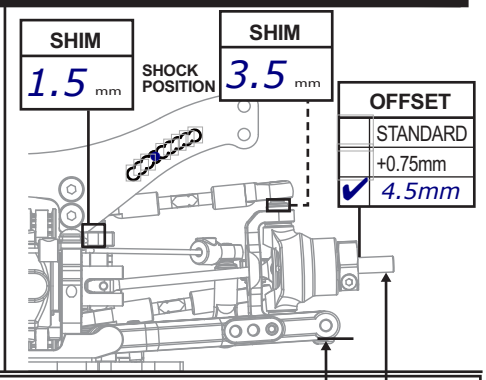


mm | 6 mm | FRONT | DOWNSTOP | REAR | 4 mm | mm






CAMBER

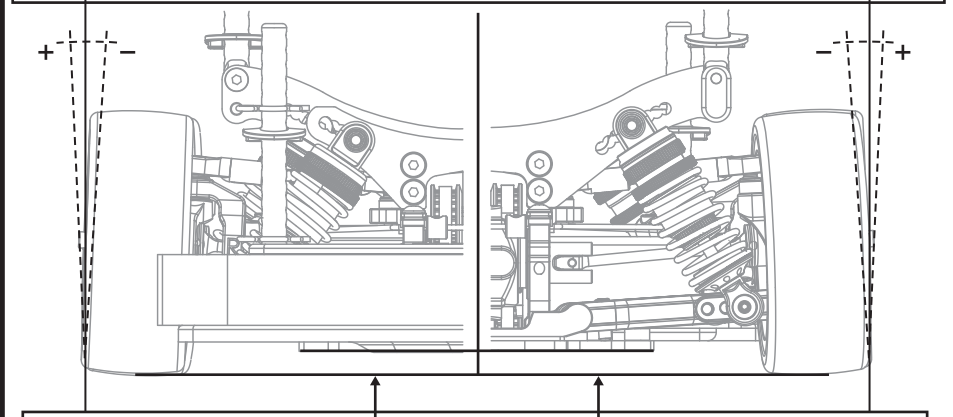


FRONT RIDE HEIGHT 5 mm | 5.2 mm REAR RIDE HEIGHT

TOE: OUT 1° / IN °

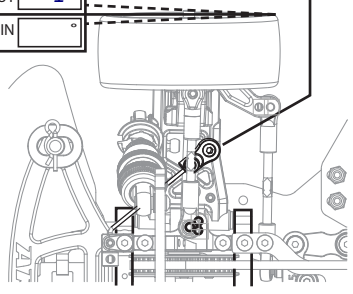


ANTIROLL BAR F 1.3 mm



BELL CRANK: ☑ STANDARD ☐ 20mm Alu ☐ 22mm Alu

ANTIROLL BAR R 1.3 mm

Rear Upright: ATS | ☐ 2 Hole | ☑ 1 Hole

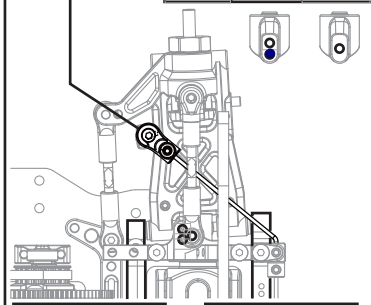


FF BRACKET # 3 | FR BRACKET # Sep #2 | RF BRACKET # 1 | RR BRACKET # 3.5

TOPDECK: 2.0 mm ver 2015

CHASSIS: 2.25 mm ver 2015

BATTERY FASTEN DIRECTION: ☐ SIDE ☑ STANDARD

BATTERY WEIGHT: g

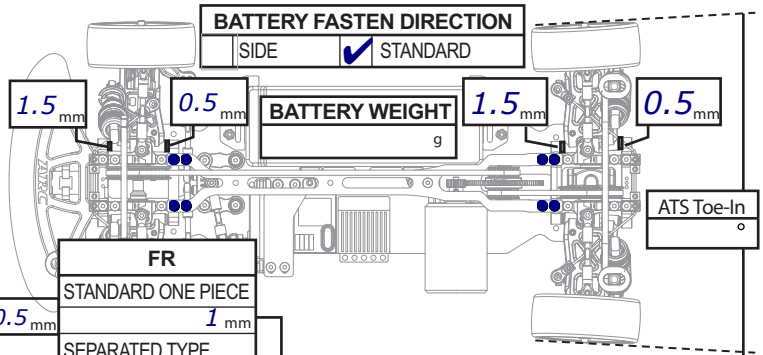

ATS Toe-In: °

DIFF HEIGHT Fr / Rr: ☐ HIGH ☐ LOW

FF 0.5 mm

FR: STANDARD ONE PIECE 1 mm; SEPARATED TYPE mm

ROLL CENTER SHIMS: RF 0.5 mm | RR 0.5 mm