# R11 SET-UP SHEET
## 1/10 Electric Touring Car
ARC

| | |
|---|---|
| RACE | Club meet |
| TRACK | Maritime raceway |
| NAME | Max Guerola |
| CITY | Chatham Kent |
| DATE | 14/04/2016 |

| TEMPERATURE | AIR 15 | TRACK |
|---|---|---|

| QUALIFYING | BEST LAPTIME | FINAL POSITION | RACE LENGTH |
|---|---|---|---|
| 2 | 12.83 SEC | 2 | 5 MIN |

TRACK CONDITION
- [x] CARPET
- [ ] ASPHALT
- [ ] INDOOR
- [ ] OUTDOOR
- [x] TECHNICAL
- [x] MIXED
- [ ] FAST

TRACTION
- [x] LOW
- [x] MEDIUM
- [ ] HIGH

**FRONT TRANSMISSION REAR**

| FRONT GEAR DIFF | REAR GEAR DIFF |
|---|---|
| [ ] CST | [ ] 2000 CST |


- [ ] ONE WAY
- [x] SPOOL

Number of Gears: [ ] 2 [x] 4

| MOTOR | Reedy 10.5 | ESC | Hobbywing v3 |
|---|---|---|---|
| PINION DP | 1 T | SPUR GEAR DP | T |
| FINAL DRIVE RATIO (Internal Ratio: 2.0) | 0.00 | | |

| FRONT | | REAR |
|---|---|---|
| OIL: 500 CST | | OIL: 500 CST |
| [ ] 3 HOLE [x] 4 HOLE | SHOCK PISTON / HOLE SIZE: 1.1 mm | [ ] 3 HOLE [x] 4 HOLE |
| SPRING: Blue | | SPRING: Blue |

| | | |
|---|---|---|
| Sorex 28r | TIRES | Sorex 28r |
| | RIM | |
| Jb blue | INSERTS | JB blue |
| Spider blue | ADDITIVE | Spider blue |

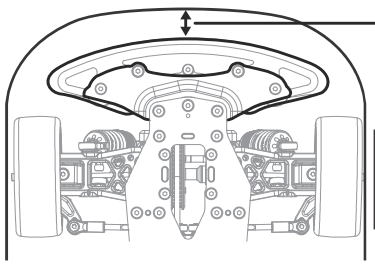


Bumper: [ ] Standard [x] Cut

BODY MOUNT DISTANCE: 10mm mm

BODY: LTC-R standard | WING: MR33


### ATS SETUP

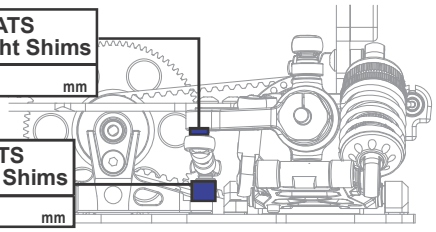


ATS Upright Shims: mm


ATS Base Shims: mm


*Screw in front of top deck and rear stiffening post in. Additive time 5 mins then warmers on for 5 mins.*

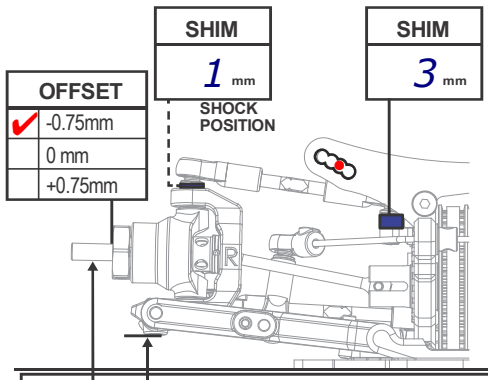

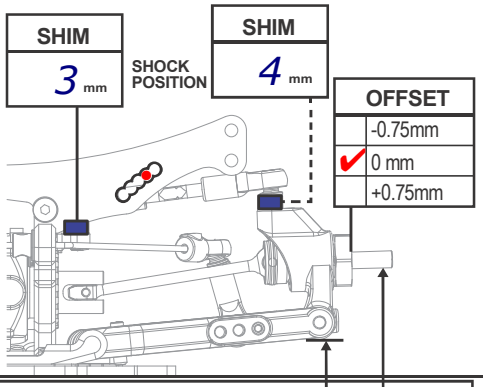

mm | 5.5 mm | FRONT | DOWNSTOP | REAR | 4.5 mm | mm



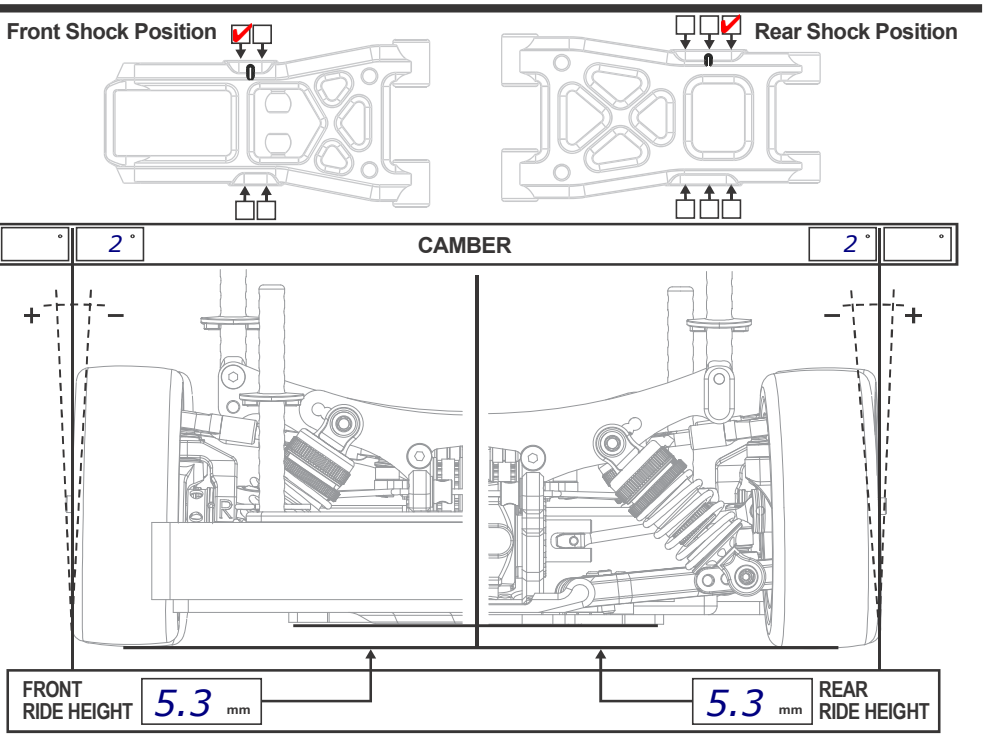


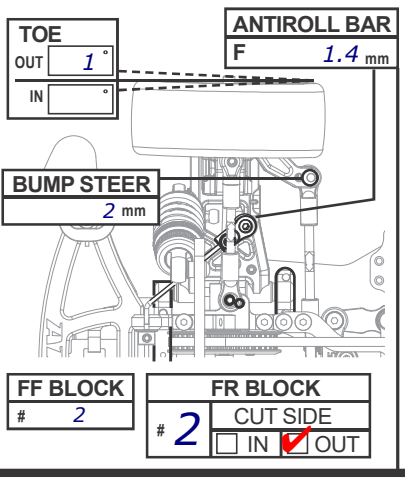

FF BLOCK # 2

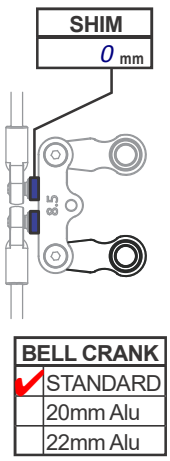FR BLOCK # 2 CUT SIDE [ ] IN [x] OUT

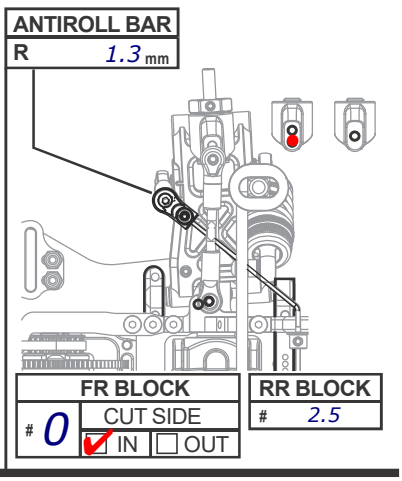


BELL CRANK
- [x] STANDARD
- [ ] 20mm Alu
- [ ] 22mm Alu





FR BLOCK # 0 CUT SIDE [x] IN [ ] OUT

RR BLOCK # 2.5

TOPDECK: 2 mm ver R11

CHASSIS: mm ver R11

DIFF HEIGHT
- [ ] HIGH
- [x] LOW

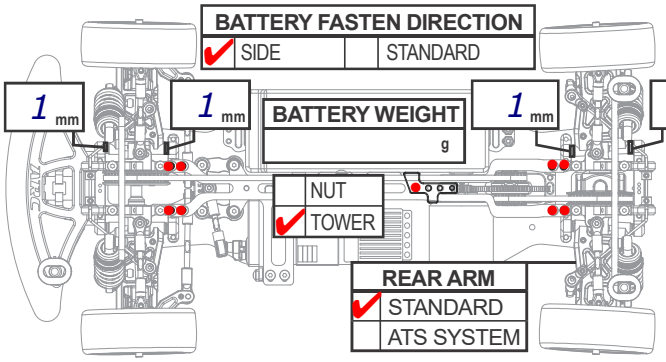


DIFF HEIGHT
- [ ] HIGH
- [x] LOW

FF 0.3 mm FR 0.3 mm | ROLL CENTER SHIM | RF 0.3 mm RR 0.3 mm

Arn0