DATE	8/22/2017
DRIVER	Atsushi Hara
TRACK	SRT

CARPET ☐ ASPHALT ☑

TRACTION

LOW	MEDIUM	HIGH
☐	☐	☑

LAYOUT

SLOW	MIXED	FAST
☐	☐	☑

ELECTRIC`S

	TYPE	SETTINGS
STEERING SERVO	Futaba	BLS571SV
ESC	Yokomo BL-PRO4	
ENGINE	Yokomo	M3 - 4.5T
TYRES/ ADDITIVE	Rush	MTG V3 Yellow

FRONT: FULL ☑ MIN. ☐ REAR: FULL ☑ MIN. ☐

SHOCK ABSORBERS

FRONT		REAR	
PISTON	Kit	PISTON	Kit
OIL	#500	OIL	#500
SPRING	Kit	SPRING	Kit

ANTI ROLL BAR FRONT

1,2 ☐ 1,3 ☑ 1,4 ☐ 1,5 ☐

ANTI ROLL BAR REAR

1,1 ☐ 1,2 ☑ 1,3 ☐ 1,4 ☐

SERVO SAVER POSITION

FORWARD ☐ REARWARD ☑

PINION 26T SPUR 116T

DIFF

HIGH ☐ LOW ☑

SPOOL

HIGH ☐ LOW ☑

DIFF OIL CST #5,000

SHOCK POSITION LOWER ARM

PART#	REAR Kit	PART#	FRONT Kit
HOLE POSITION BALL LINK	INSIDE ☐ OUTSIDE ☑	HOLE POSITION BALL LINK	INSIDE ☐ OUTSIDE ☑


FLEX

ULTRAFLEX ☑

TOPDECK ☐ ☐ ☐

SCREW`S ASSEMBLED

CASTER POSITION



Lower arm angle A2107A~D needs caster re-adjustement! 0,5°=0,5mm shim A2110E!

ROD POSITION

UPPER ARM POSITIOM: INSIDE ☑ OUTSIDE


CAMBER: LEFT +2 +2 RIGHT


SHOCK HOLE ○○●○

SHIM(mm) 0 0 SHIM(mm)

FF: A2105A/A2104 1pc.● 2pcs.○

FR: A2105B/A2104 1pc.● 2pcs.○




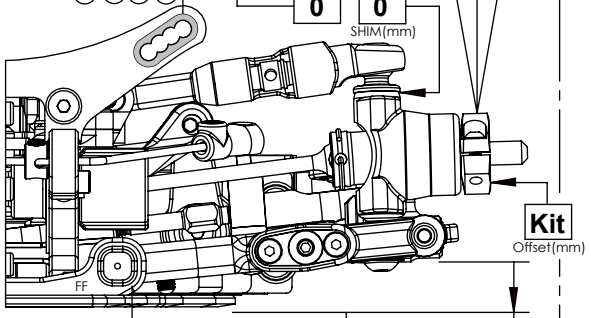

ROLL CENTER/ TRACK WIDTH *(LEFT SIDE VIEW)*

5.7 (mm) RIDE HEIGHT 5 (mm) DOWNSTOP

CAMBER LINK POSITION



CAMBER: LEFT +2.5 +2.5 RIGHT

SHOCK HOLE ○○○●


SHIM(mm) 1


RF: A2106B/A2104 1pc.○ 2pcs.●

RR: A2106A/A2104 1pc.● 2pcs.○

FINAL TOE IN 3

BOTH CENTER = 3° TOE IN



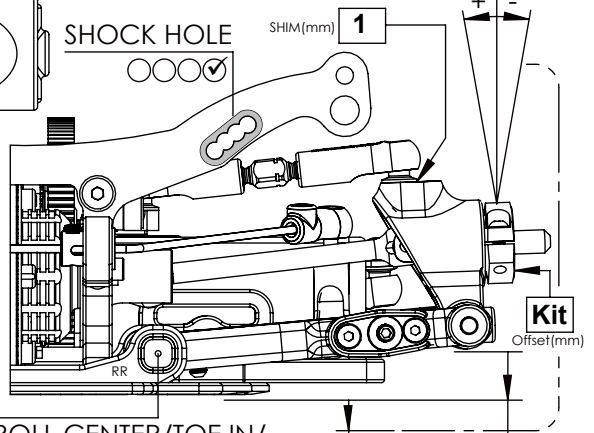

ROLL CENTER/TOE IN/ TRACK WIDTH *(RIGHT SIDE VIEW)*


6 (mm) RIDE HEIGHT 4 (mm) DOWNSTOP

A2404 ☑

ASSEMBLED SCREW´S ○ ● ● ●

20g


A2405 ☐



TOE OUT° 1

WHEELBASE WEIGHT g.

1 (mm) 10 0 (mm) 1

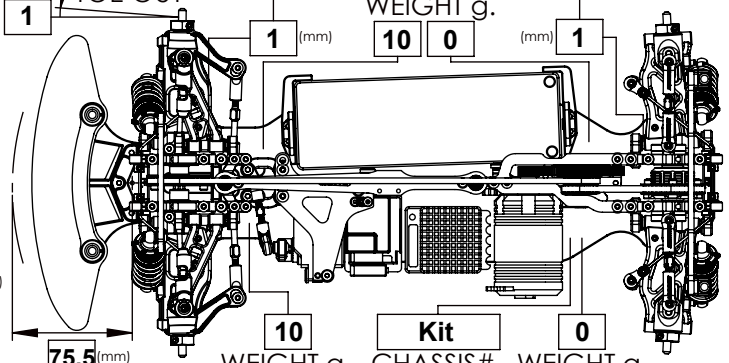

10 WEIGHT g. Kit CHASSIS# 0 WEIGHT g.

75.5 (mm) BODY POSITION

STEERING SHAFT MOUNTED ON: SERVOPLATE ☐ CHASSIS ☑


STEERING STOPPER A2304/A2305/A2306

◎ ☑ ∅5 ☐ ∅5,5 ☐ ∅6 ☐ NO

WING TYPE PF High DF

PF LTC-R LW

BODY TYPE



10 OVERHANG(mm)

NOTES: