DRIVER: Ronny Hoffmann RH79 Car No.6 TRACK/EVENT: SPC Round 2 Beidersheim DATE: 06.01.2018

TRACK CONDITION
ENVIRONMENT: INDOOR ☑ OUTDOOR ☐
COMPOSITION: CARPET ☑ ASPHALT ☐
TRACTION: LOW ☐ MEDIUM ☑ HIGH ☑
LAYOUT: SLOW ☑ MIXED ☑ FAST ☐
SURFACE: BUMPY ☐ SMOOTH ☐
NOTE:

ELECTRONICS
MOTOR: LRP X20 TIMING: 30° Fix
PINION: 27 SPUR: 78 48DB
ESC: Nosram Flow X Black
BATTERY: Orca 6300 LCG HV
SERVO: Sanwa 801
RECEIVER: Sanwa 472

SHOCK ABSORBERS
FRONT	REAR
PISTON: 4	PISTON: 4
OIL: 500Hudy	OIL: 500 Hudy
SPRING: XR2.5-2.8	SPRING: XR 2.7
REBOUND: 20%	REBOUND: 20%

NOTE:

ANTI-ROLL BAR
FRONT: 1.2 ☐ 1.3 ☐ 1.4 ☑ 1.5 ☐ _____ ☐
REAR: 1.1 ☐ 1.2 ☐ 1.3 ☑ 1.4 ☐ _____ ☐

TIRES & WHEELS
TIRE: Volante 28
INSERT:
WHEEL:
TREATMENT: CS High Gripp
NOTE:

FRONT 2min MIN. REAR 15 MIN.


SERVO SAVER POSITION
FORWARD ☐ ☐ REARWARD ☑ ☑ ☐ ☐

TRANSMISSION HEIGHT
SPOOL
HIGH ☐
LOW ☑

DIFFERENTIAL
HIGH ☑
LOW ☐
OIL: 5500MM

FLEX
ULTRAFLEX ☐
TOPDECK ☑
SCREW'S ASSEMBLED

AERODYNAMICS
BODY: Protoform MS7
WING: KIT

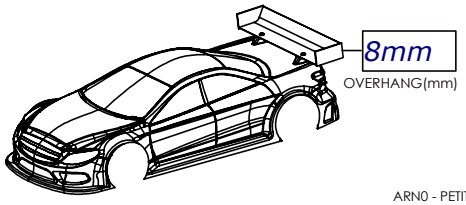


ARN0 - PETITRC.COM

CASTER POSITION
2,1 (mm)
Lower arm angle A2107A~D needs caster re-adjustement! 0,5°=0,5mm shim A2110E!
ROD POSITION

UPPER ARM POSITION
INSIDE ☑ OUTSIDE ☐
SHIM(mm) 4

CAMBER
L 1,5 1,5 R
SHIM(mm) 1

SHOCK HOLE
FF: A2105A/A2104
1pc. ☑ 2pcs. ☐
FR: A2105B/A2104
1pc. ☑ 2pcs. ☐

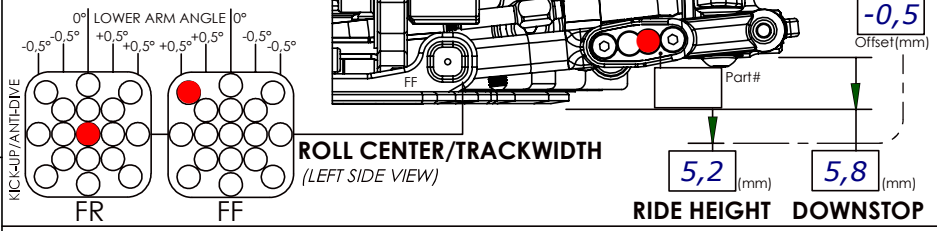

ROLL CENTER/TRACKWIDTH (LEFT SIDE VIEW)

5,2 (mm) RIDE HEIGHT
5,8 (mm) DOWNSTOP


CAMBER LINK POSITION
SHIM(mm) 1
INSIDE ☑ OUTSIDE ☐
A2121
SHIM(mm) 3
A2116

CAMBER
L 2,0 2,0 R

SHOCK HOLE
SHIM(mm) 4,5

RF: A2106B/A2104
1pc. ☐ 2pcs. ☑
RR: A2106A/A2104
1pc. ☑ 2pcs. ☐

FINAL TOE IN 3
BOTH CENTER = 3° TOE IN

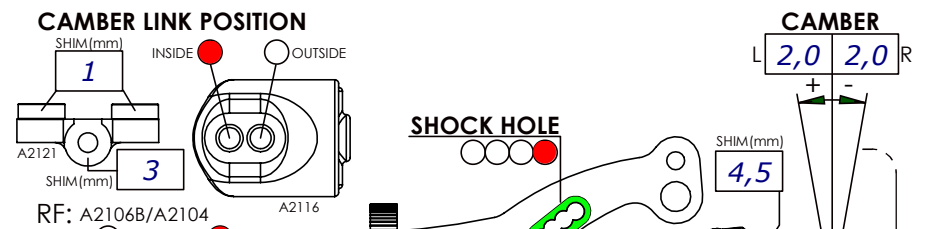


ROLL CENTER/TOE IN/ TRACK WIDTH (RIGHT SIDE VIEW)

5,3 (mm) RIDE HEIGHT
4,4 (mm) DOWNSTOP

A2404 ☑
ASSEMBLED SCREW'S
A2405 ☐

TOE° 1
WHEELBASE (mm) 2
WEIGHT (grs) 10gr 0 1
FRONT ☐ CONNECTORS REAR ☑

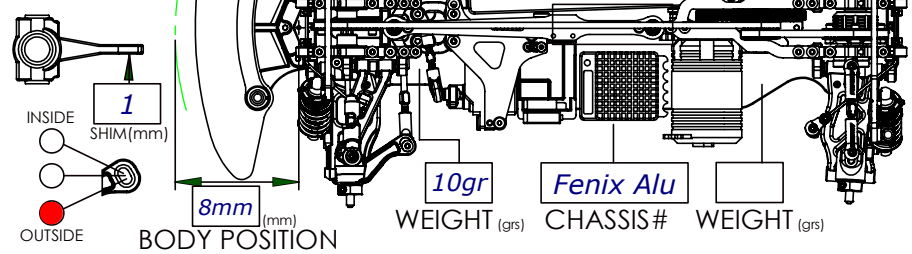

INSIDE ☐ OUTSIDE ☑
SHIM(mm) 1
8mm (mm) BODY POSITION

10gr WEIGHT (grs)
Fenix Alu CHASSIS#
WEIGHT (grs)

STEERING SHAFT MOUNTED ON
☐ SERVOPLATE
☑ CHASSIS

STEERING STOPPER A2304/A2305/A2306
☑ Ø5 ☐ Ø5,5 ☐ Ø6 ☐ NO

NOTES:
Topdeck Rear0,5mm Shim /TA2309A on Servoplate to Fix!
O-Ring in Front of Upper Arms
A2404 0,5mm Shim for more Flex
A2121 upside down
Xray 4.9mm Alu Ball & Composite Ball Joint Rear Upright (A2116)
Shims under Shocks :
Front 1mm
Rear: Kit