



Ver. 2110-1

DRIVER	*Ronny Hoffmann*		
DATE	*09.01.2022*		
TRACK	Carpet ◉ Asphalt ○ *TC-Heuchelheim*		
TRACTION	○ LOW ○ MEDIUM ◉ HIGH		
LAYOUT	○ SLOW ◉ MIXED ○ FAST		
TEMP°C	**AIR** *22*	**TRACK**	
ELECTRONICS			
ESC *HW*	ESC SET	MOTOR *RCK 17,5*	
SERVO *Sanwa*	RECEIVER *Sanwa*	BATTERY *LRP 600(*	
TIRES			
BRAND	*RCK 28R*		
TYPE			
ADDITIVE	*MR33*		
WARMER °C	FRONT	REAR	
TIME(min)	FRONT	REAR	
SHOCK ABSORBERS			
PISTON	FRONT *std.*	REAR *std.*	
SHOCK CASE	*std.*	*std.*	
OIL	*500 CST*	*500CST*	
SPRING	*6.75P*	*6.5P*	
LENGTH	*9.5*	*9.5*	
ANTI ROLL BAR DIAMETER FRONT/REAR			
FRONT	*1.1*	**REAR**	*1.1*
REAR DIFFERENTIAL			
DIFF OIL CST (1,6g oil quty.)	*12500 MR33*		
GEAR RATIO (T)Spur/(T)Pinion*1,9=Ratio			
PINION	*45*	**SPUR**	*100*
AERODYNAMIC SETTINGS			
BODY TYPE	*Zoo Wolverine*		
WING TYPE	*KIT*		
WING POS	(mm) *std*		
BODY POSITION (see picture below)	(mm) ⟺ horizontal		
FRONT BODY HEIGHT & POSITION	**REAR BODY POST A2407C** ○	**REAR BODY POST A2416B** ○	
(mm) vertical ⇕ *44.5mm*	(mm) *45mm+4*	(mm)	



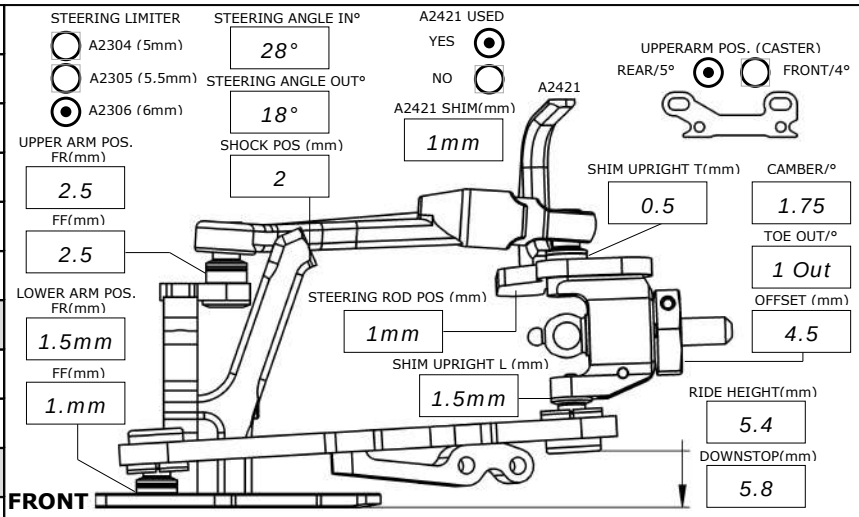

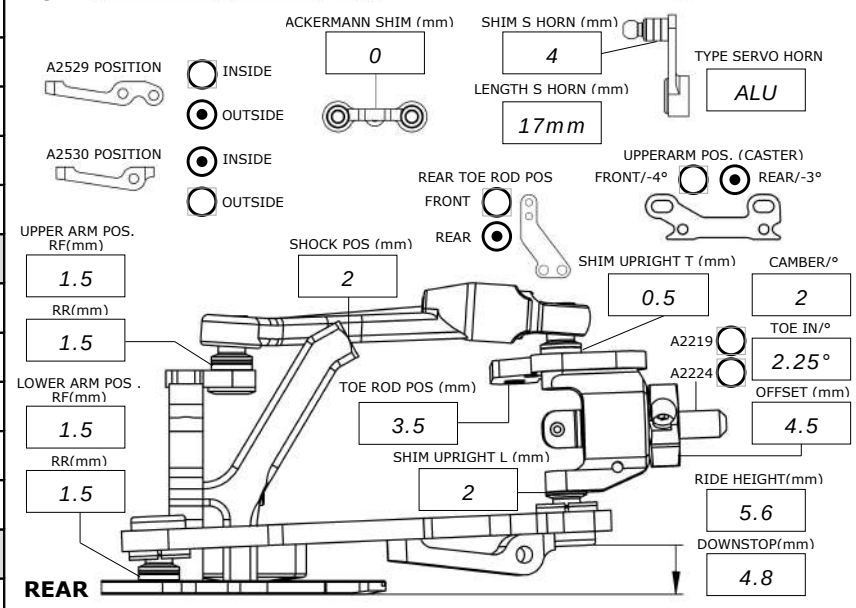

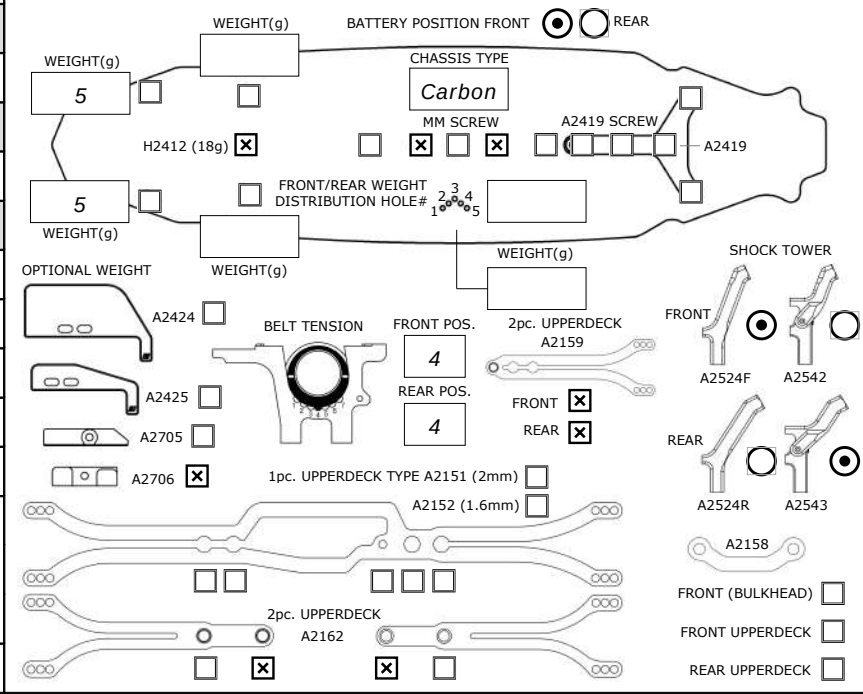

REMARKS

Front TOE ROD POS (Front not Rear) more CornerSpeed ,More Steering