Driver and Event

Name	CS - TEAM
Date	14.11.2011
Event	Indoor Offroad Quakenbrück
Weather	
Result	

Track Conditions

Surface	Carpet
Grip Level	high grip
Track Condition	

COUGAR SV
Takes 2wd to the next Level

Driver Notes

Front arms - reverse
Shocks: New rounded pistons, limiters 1mm

One car with saddle-pack conversion, front tires cut, front shocks with oil 30wt

Editable by Am0(@)PetitRC.com

Electrics and Gearing

E.S.C	CS Rocket Comp
Servo	
Reciever	Sanwa
Batteries	CS Lipo 5200
Motor	7,5
Spur	80
Pinion	23

Ext Gears: 34/22 ☐ | 33/23 ✓ | 32/24 ☐

Wheels and Tyres

Rear Wheels	Schumacher Rev lite
Rear Tyre	Minipin Yellow
Rear Insert	Soft
Front Wheels	Schumacher Rev lite (narrow)
Front Tyre	Stagger Rib
Front Insert	no insert

Differential Height

High ☐ | Low ✓


Topdeck

Stiff ✓ | Medium ☐ | Soft ☐

Rear Shocks

Oil 30 | Spring 2,5 | Ball Socket: Short ✓ / Long ☐


Piston Holes: 2 ☐ | 3 ☐ | 4 ☐ | 5 ✓ | 6 ☐

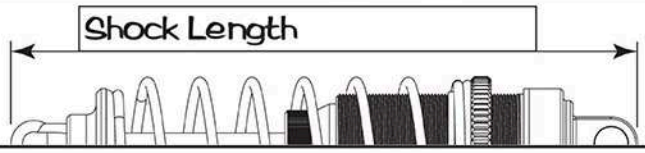

Front Shocks

Oil 35 | Spring 3,5


Piston Holes: 2 ☐ | 3 ✓ | 4 ☐ | 5 ☐ | 6 ☐

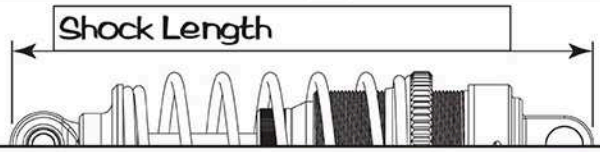


Rear Suspension

Anti roll bar: No ☐ | 1.20 ✓ | 1.40 ☐ | 1.60 ☐

Strap: 3° ☐ | 4° ✓ | 5° ☐

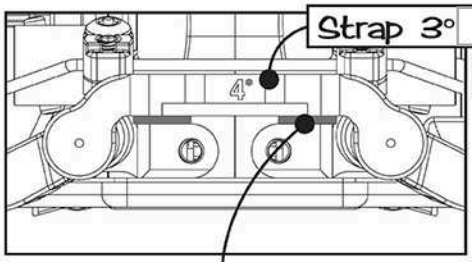


Link Washers 1mm



Antisquat Washers 0mm

Link Washers 2mm

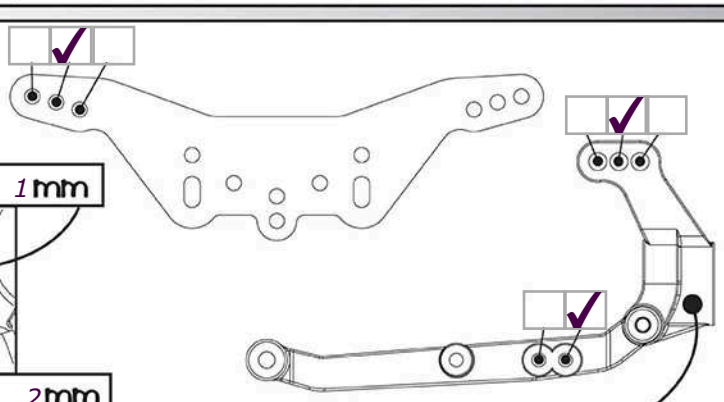


Rear Hub Carrier: Alloy ☐ | Std ✓

Alloy Hub Carrier: +1° ☐ | -1° ☐

Shock Postion: Front ☐ | Rear ✓


Wheelbase: Short ☐ | Med ☐ | Long ✓

Rear Camber at Ride Height





49 ☐ | 44 ☐ | 39 ✓ | 34 ☐

Front Suspension

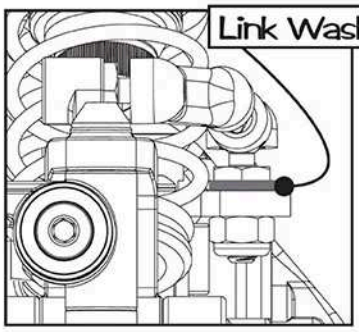


Link Washers 1mm



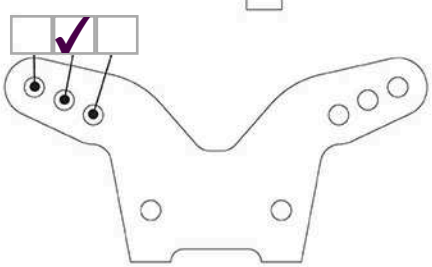


Yoke: 0° ✓ | 5° ☐

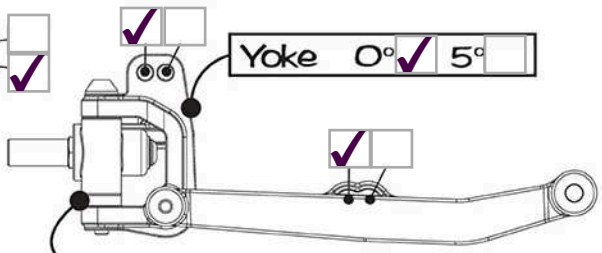

Hub Carrier: High ☐ | Low ✓

Front Camber at Ride Height

Front Toe In



50.5 ☐ | 45.5 ☐ | 40.5 ✓