Schumacher

CATPB

Driver: Elias Johansson **Date:** 2025 **Event/Track:** Galaxen

Qualify: **Final:** **Best Lap:**

TRACK TYPE

Grip Level	High ☐ Medium ■ Low ☐
Type	Tight ☐ Open ☐ Mixed ■
Condition	Flat ■ Bumpy ☐ Mixed ☐
Surface	Clay ☐ Long Astro ☐ Carpet ■ Grass ☐ Short Astro ☐ Mixed ☐
Weather	

TYRES

	FRONT	REAR
Tyres	Contact / Hotrace	Contact / Hotrace
Wheels		
Inserts		


Notes:

Notes:

FRONT SUSPENSION

KEY: **P** = Plastic, **A** = Alloy, **B** = Brass, **CF** = Carbon Fibre, **S2** = Schumacher Composite, **M** = Medium, **S** = Stiff, **Sh** = Short, **H** = High, **L** = Low, **F** = Front, **R** = Rear, **Y** = Yes, **N** = No


Ride Height	12 mm
Toe	2 deg In ☐ Out ■
Camber at Ride Height	2 deg
ARB	N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ■ 1.8 ☐ 1.9 ☐ 2.0 ☐ 2.1 ☐
Driveshaft Type	CVD ☐ Roche ■ U/J ☐
Steering Arm	Kit ■ 1 Dot ☐ 2 Dot ☐ 3 Dot ☐

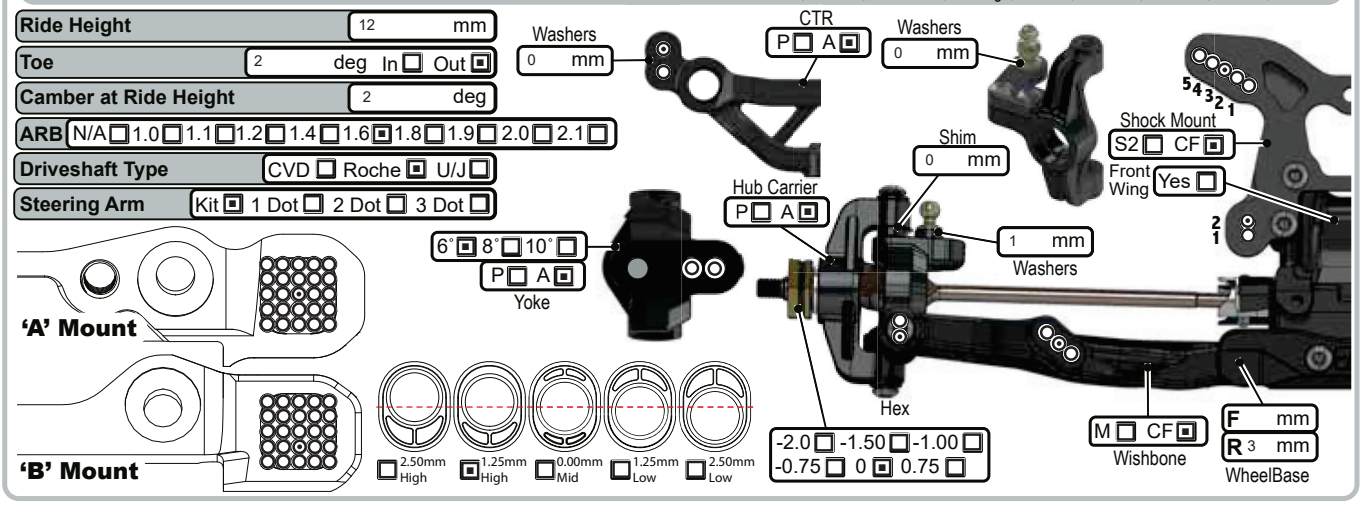

REAR SUSPENSION

KEY: **P** = Plastic, **A** = Alloy, **B** = Brass, **CF** = Carbon Fibre, **S2** = Schumacher Composite, **M** = Medium, **S** = Stiff, **Sh** = Short, **H** = High, **L** = Low, **F** = Front, **R** = Rear, **Y** = Yes, **N** = No

Ride Height	13 mm
Camber at Ride Height	2 deg
ARB	N/A ☐ 1.0 ☐ 1.1 ☐ 1.2 ☐ 1.4 ☐ 1.6 ☐ 1.8 ☐ 1.9 ■ 2.0 ☐ 2.1 ☐
Wing Gurney Height	mm
Driveshaft Type	CVD ☐ U/J ■
High Roll Centre Straps	Y ☐ N ■

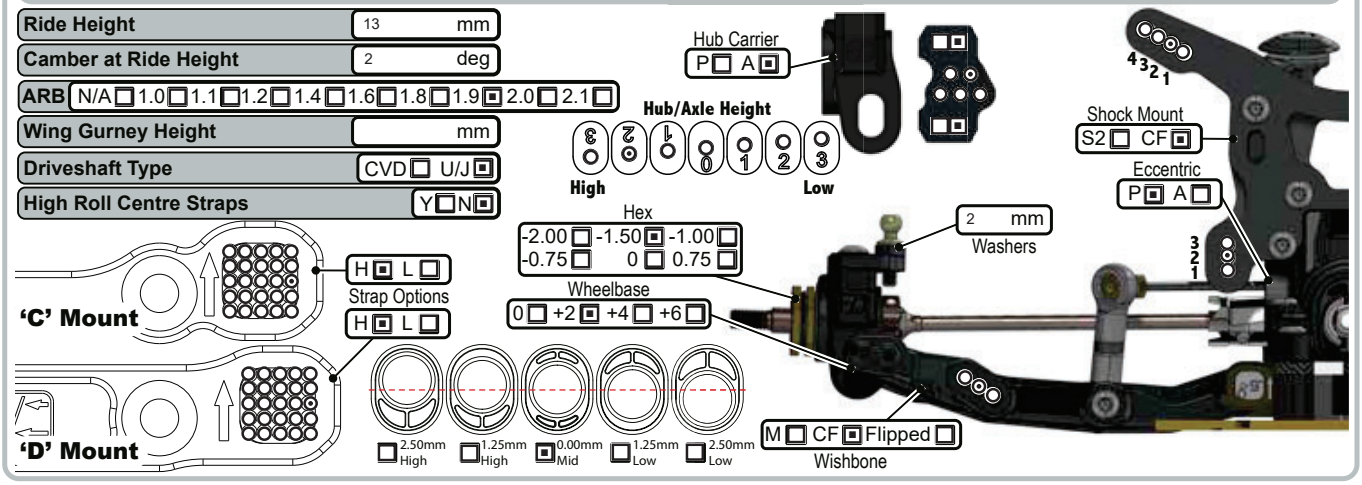

TRANSMISSION

Lock Out	Y ☐ N ■
Slipper Plates	2 ☐ 3 ■

Differential Oil

Front (cSt)	Centre (cSt)	Rear (cSt)
20 k	500 k	15 k
Gears 2 ☐ 4 ■	Gears 2 ☐ 4 ■	Gears 2 ☐ 4 ■

Centre Transmission

F.A.B	Lock Out	Gear Diff
Y ■ N ☐	Y ☐ N ■	Y ■ N ☐

Notes:
Works With Slipper and diff

EQUIPMENT

E.S.C.	Hobbywing G3
Servo	Sanwa
RX	
LiPo	4800
Bodyshell	Lens / F2 LW
Wing	6,5
Motor	5.0
Timing	34 deg
Pinion	20 T
Spur	83 T

CHASSIS

LiPo Position	1 ☐ 2 ☐ 3 ■
Running Weight	g
Front Deck	Y ■ N ☐
Rear Deck	Y ■ N ☐
Chassis Length	S ☐ L ■

WEIGHTS

Notes:

SHOCKS

KEY: **i** = Internal, **e** = External, **V** = Vented, **S** = Sealed, **A** = Aeration

	FRONT	REAR
Cap	V ☐ S ☐ A ☐	V ☐ S ☐ A ☐
Kashima	Y ■ N ☐	Y ■ N ☐
Oil	cSt	cSt
Piston	2 x 1.6 Tapered	2 x 1.8 Tapered
Spring	HR Black lb/in	HR Black lb/in
Limiters (i)	0 mm	0 mm
Stroke	24 mm	28 mm
Limiters (e)	0 mm	0 mm
Stand Off	STD mm	STD mm