SET UP SHEET

Schumacher

STORM ST2
PRO 1/10th 2WD Off-Road Stadium Truck

Driver: VALENTE ALEX **Date:** 23/24/05/2026 **Event/Track:** FRENCH NATIONAL RD3

Qualify: 1 **Final:** 1ST **Best Lap:**

TRACK TYPE

Grip Level	High ☐ Medium ☒ Low ☐
Type	Tight ☐ Open ☒ Mixed ☐
Condition	Flat ☒ Bumpy ☐ Mixed ☐
Surface	Clay ☐ Long Astro ☒ Carpet ☐ Grass ☐ Short Astro ☐ Mixed ☐
Weather	DRY

TYRES

	FRONT	REAR
Tyres	STAGERED CUT	V2
Wheels	SCHUMACHER	SCHUMACHER
Inserts	WHITE	FOAM WHITE

Notes:


Notes:

FRONT SUSPENSION

KEY: **P** = Plastic, **A** = Alloy, **B** = Brass, **CF** = Carbon Fibre, **S2** = Schumacher Composite, **M** = Medium, **S** = Stiff, **Sh** = Short, **H** = High, **L** = Low, **F** = Front, **R** = Rear, **Y** = Yes, **N** = No

Ride Height	18 mm
Wheelbase	Sh ☐ L ☒
Toe	0;5 deg In ☐ Out ☒
Camber at Ride Height	1.5 deg
Anti Roll Bar	1.2 ☐ 1.3 ☐ 1.4 ☐ 1.5 ☐ 1.6 ☒
Bump Steer Washers	2 mm
Pivot Block Height	H ☒ M ☐ L ☐

Notes:

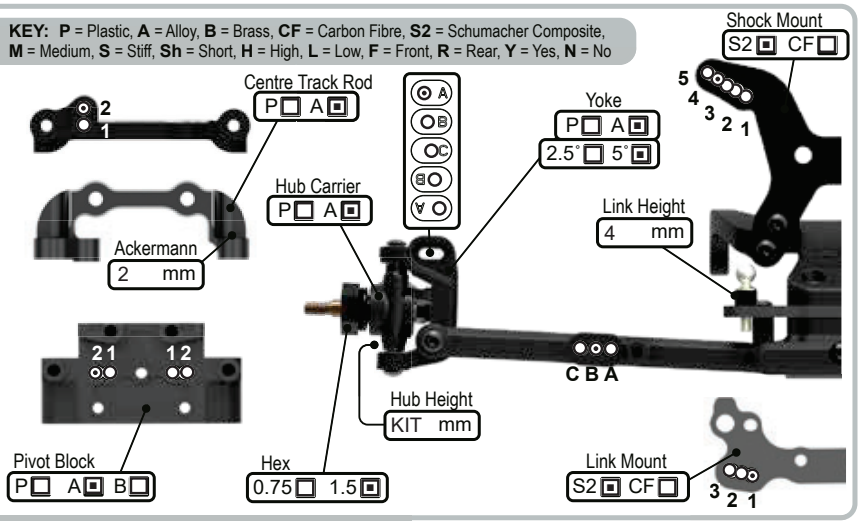


REAR SUSPENSION

KEY: **P** = Plastic, **A** = Alloy, **B** = Brass, **CF** = Carbon Fibre, **S2** = Schumacher Composite, **M** = Medium, **S** = Stiff, **Sh** = Short, **H** = High, **L** = Low, **F** = Front, **R** = Rear, **Y** = Yes, **N** = No

Ride Height	18 mm
Wheelbase	Sh ☒ M ☐ L ☐
Anti-Squat	1° ☒ 2° ☐ 3° ☐ 4° ☐
Toe	4° ☐ 3.5° ☒ 3° ☐ 2.5° ☐ 2° ☐ 1.5° ☐ 1.0° ☐ 0.5° ☐
Camber at Ride Height	2 deg
Anti Roll Bar	1.0 ☐ 1.1 ☐ 1.2 ☐ 1.3 ☐ 1.4 ☐
Wing Gurney Height	mm
Rearward Shock Position Only	A ☐ B ☐
Driveshaft Type	CVD ☐ U/J ☒

Notes:

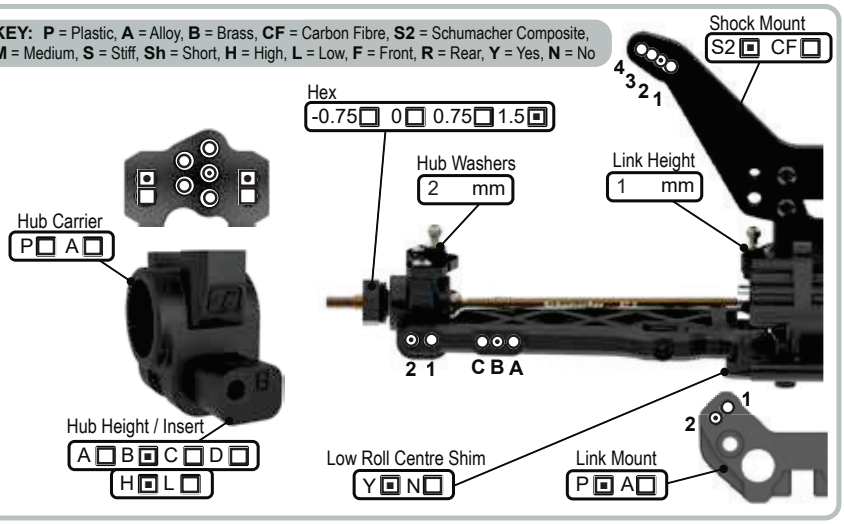

TRANSMISSION

Diff Height	H ☐ M ☐ L ☒
Diff Oil	cSt
Diff Type	B ☒ 2g ☐ 4g ☐
Motor	6.5 LRP
Rotor Dia.	mm
Timing	25 deg
Pinion	21 t
Spur	KIT t
Motor Plate	A ☒ CF ☐
Lock Out	Y ☐ N ☒
Slipper Plates	2 ☒ 3 ☐

CHASSIS

Chassis	A ☒ C/F ☐
Chassis Insert	0mm ☒ +5mm ☐
LiPo Position	1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☒ 7 ☐ 8 ☐
X Brace	Y ☐ N ☒
Running Weight	g
Radio Tray	1 ☐ 2 ☐ 3 ☒

Notes:

EQUIPMENT

E.S.C.	HW
Servo	SANWA
RX	SANWA
LiPo	IP 4800
Bodyshell	KIT

WEIGHTS

Chassis	F ☒ R ☐
Rear Strap	F ☐ R ☐
Radio Tray	Y ☒ N ☐
Under LiPo	Y ☐ N ☐

SHOCKS

KEY: **i** = Internal, **e** = External, **V** = Vented, **S** = Sealed, **A** = Aeration

	FRONT	REAR
Cap	V ☐ S ☐ A ☒	V ☐ S ☐ A ☒
Body	KIT	KIT
Oil	450 cSt	400 cSt
Piston	1.9 X2	2.1 X 2
Spring	YELLOW lb/in	BLUE lb/in
Limiters (i)	2 mm	0 mm
Stroke	mm	mm
Limiters (e)	RED O RING mm	NONE mm



Notes: