# BLACKBOX 410R
## ELECTRONICS SET-UP SHEET

| | |
|---|---|
| Voltage input: | 3.7 - 7.4/ 1-2 LiPo |
| On resistance (Ω) | 0.00035 x2 |
| Continuous current (A) | 150 |
| Weight without wires (g) | 49 |
| Motor limit (2-pole/4-pole) | 3.5T/4800kV |
| SBEC | 5.5 - 7.0V/5A |

DRIVER: Team Associated France  EVENT: CF5 lvdm  TRACK: terre  DATE: 07/2015

CONDITIONS: Glisse  VEHICLE: b5 mid  BATTERY: shorty  TEMP: 25

### ESC INFO

| | |
|---|---|
| FIRMWARE: | 2.7 |
| CAPACITOR TYPE: | REEDY OPTION |
| FAN (YES/NO): | Y |
| WIRE SIZE: | 14 |
| PROFILE #: | 1 |

### BRAKE

| | |
|---|---|
| DRAG BRAKE: | 20 |
| BRAKE FREQ: | 8000 |
| BRAKE STRENGTH: | 100 |
| BRAKE CURVE: | -20 |

### SPD SENS BRAKE

| | |
|---|---|
| LOW SPEED STR: | 20 |
| HIGH SPEED STR: | 10 |
| SWITCHOVER RPM: | |

### THROTTLE

| | |
|---|---|
| THROTTLE FREQ: | 16000 |
| THROTTLE PUNCH: | 98 |
| THROTTLE CURVE: | -20 |
| DEAD BAND: | 6 |

### MOTOR POWER

#### ACCEL BOOST

| | |
|---|---|
| START RPM: | |
| FINISH RPM: | |
| MAX ADV TIMING: | 0 |

#### TOP SPEED TIMING

| | |
|---|---|
| SLEW RATE: | 5/0.1 |
| MAX ADV TIMING: | 0 |
| DELAY TIME: | 0.4 |

### MISC CONTROL

| | |
|---|---|
| RUN MODE: | OPEN |
| MOTOR TYPE: | 2 POLE |
| SBEC VOLTAGE: | 5.5 |
| FORWARD POWER: | 100 |
| REVERSE POWER: | 25 |

### PROTECTION

| | |
|---|---|
| BATTERY CUTOFF: | 6.5 |
| ESC TEMP CUTOFF: | 230 |


### MOTOR SETTINGS

| | |
|---|---|
| MOTOR: | REEDY 9.5 |
| WIND: | 9.5 |
| TIMING: | 20 |
| ROTOR: | STOCK |
| FDR/ROLLOUT: | 75/26 |
| TEMPERATURE: | |

### RADIO SETTINGS

| | |
|---|---|
| THROTTLE EPA: | 100 |
| BRAKE EPA: | 98 |
| THROTTLE EXPO: | 0 |
| BRAKE EXPO: | |

NOTES:

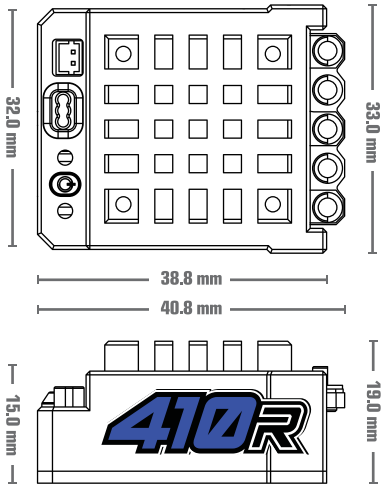


www.petitrc.com

REEDY POWERED
www.ReedyPower.com

29 TIME IFMAR WORLD CHAMPIONS REEDY

www.facebook.com/ReedyPower

twitter.com/ReedyPower

Arn0