ZERO FWD

1/18 SCALE RADIO CONTROL FWD CHASSIS SETUP SHEET

DRIVER (賽員) mizan DATE

FINAL POSITION (決賽成績) 3 BEST LAP (最佳圈數)

CIRCUIT sacc CLASS (組別) ● BLINKY ○ OPEN STOCK ○ MODIFY


■ PLACE (地點) ○ INDOOR (室內) ● OUTDOOR (室外)

■ TRACK (場地) ○ ASPHALT (瀝青) ○ CARPET (地毯)

■ TRACTION (抓著力) ● HIGH (高) ○ MEDIUM (中) ○ LOW (低)

■ TRACK CONDITION (場地狀況) ● FLAT (平坦) ○ BUMPY (顛簸)

FRONT (前方)




GEAR DIFF (齒輪差速器)

● SPOOL (直軸)

○ GEAR (齒式)

(油濃度/重量) 1m WT / G

° PUDDY (泥膠)




BODY SHIELD ALLOWED ● YES ○ NO

UPPER KINGPIN

HEX THICKNESS mm

BUMP STEER mm






mm



ABSORB SPACER 0 mm

TWIST BAR PLACED ● HORIZONTAL ○ VERTICAL




UPPER LINKAGE INNER SPACER mm




UPPER BEARING HOUSING



LOWER



ACKERMAN SPACER mm



ROLLING SHIMS mm

LOWER WISHBONE SHIMS

ABSORBER 減震器

OIL (油濃度) # 400

PISTON (活塞) ② ③ ● HOLES mm

SPRING (彈簧) white

BLADDER FOAM (油壓頂部海綿) ○ YES ● NO

REBOUND (彈芯) 0 %

CASTER (傾角) °

RIDE HEIGHT (離地距) mm

CAMBER ANGLE (外傾角) 1 °


SWAY BAR (防傾桿) mm

DROOP (油壓行程) mm


DOWNSTOP (擺臂止限位) mm

TOE ANGLE (束角) 1.5 °

REAR (後方)




HEX THICKNESS mm




ROLLING SHIMS mm

LOWER WISHBONE SHIMS




mm




ABSORB SPACER 0 mm

● YES BODY ○ NO SHIELD ALLOWED



UPPER LINKAGE INNER SPACER mm



UPPER



BEARING HOUSING



LOWER

TWIST BAR PLACED ● HORIZONTAL ○ VERTICAL

ARS SPACER mm

ABSORBER 減震器

OIL (油濃度) # 400

PISTON (活塞) ② ③ ● HOLES mm

SPRING (彈簧) white

BLADDER FOAM (油壓頂部海綿) ○ YES ● NO

REBOUND (彈芯) 0 %

CASTER (傾角) °

RIDE HEIGHT (離地距) mm

CAMBER ANGLE (外傾角) 1.5 °

SWAY BAR (防傾桿) mm

DROOP (油壓行程) mm


DOWNSTOP (擺臂止限位) mm

TOE ANGLE (束角) 1.5 °

OTHER (其他)


● UPPER DECK SCREWED POSITIONING




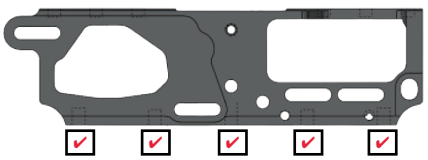

✓ MOTOR MOUNT SCREWED POSITIONING

REAR BODY POST PLACED ● HORIZONTAL ○ VERTICAL



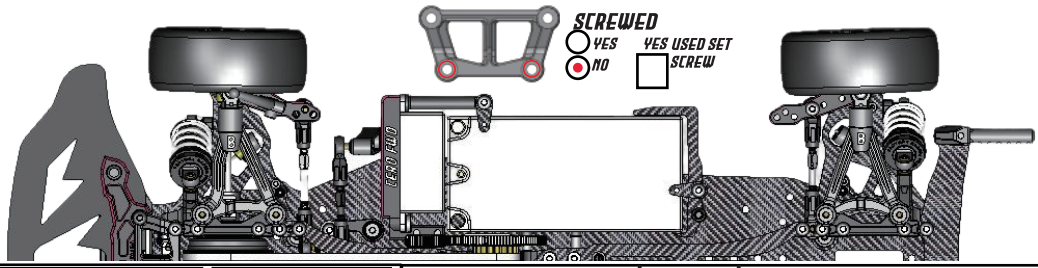

SCREWED ○ YES ● NO YES USED SET SCREW

FRONT THREAD mm

REAR THREAD mm

WHEELBASE mm

WEIGHT g

FRONT (前方)		REAR (後方)
TIRE (胎皮)	rush	rush
COMPOUND (胎皮值)		
INSERT (胎胆)		
WHEEL (輪圈)	spoke	spoke
TIRE TREATMENT (胎水)		

SPUR GEAR (大減齒)	78 T	64 PITCH	PINION GEAR (摩打齒) 45 T
MOTOR (馬達)	rocket	BATTERY (電池)	
ESC (電調)	rocket	SERVO (伺服器)	
BODY (車殼)		WING (風翼)	
FINAL DRIVE RATIO (齒比)	(SPUR / PINION X 1.9) : 1 =		

COMMENT: