
TF6 SP 2 BELT DRIVE 4WD — SET UP SHEET — KYOSHO


Name: GALINEAU S. | Date: 27/07/2012 | Truck / City: HEEMSTEDE | Event: WC 12'

Front Suspension

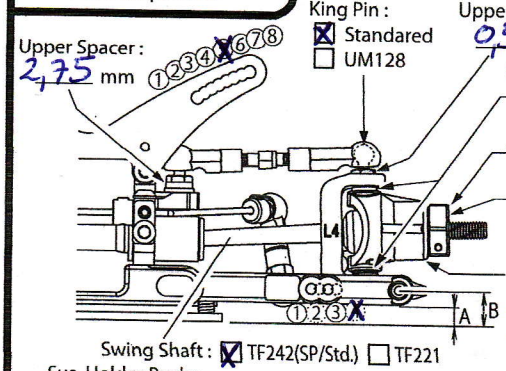

Upper Spacer: 2,75 mm (1 2 3 4 5 6 7 8)
King Pin: [X] Standared [ ] UM128
Upper Spacer: 0,5 mm
Knuckle Spacer: [X] Upper [ ] Lower
Wheel Spacer: 1 mm
Knuckle: [X] TF227(SP/Std.) [ ] TF224
Droop: [X] A [X] B 6 mm
Swing Shaft: [X] TF242(SP/Std.) [ ] TF221
Upper Rod Position: [X] TF240/241(SP/Std.) [ ] TF207/208
Drive Hub: [ ] TFW113(4.0) [X] LAW30R(4.5/Std.) [ ] TFW031(5.2)
Diff. Position: [ ] [X]
Sus. Arm Spacer: Front: 2 mm Rear: 1 mm
Knuckle Spacer: 1 mm
Ride Height: 5 mm
Sway Bar: 1.4mm Toe Angle: 0 °
Sus. Holder Bush: Front (In) Out C — Rear (In) Out C
Sus. Holder Spacer: Front 0,5 mm — Rear 1 mm
Sus. Arm: [X] TF005H(Std.) [ ] TF226H
Sway Bar Holder: [X] Plastic(SP/Std.) [ ] Aluminum(TFW110)
-2 mm
Camber Angle: -1,5°
Front Diff.: [X] Spool [ ] One Way [ ] Diff
Notes:


Rear Suspension

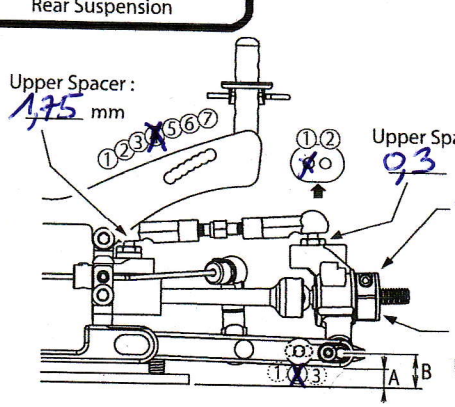

Upper Spacer: 1,75 mm (1 2 3 4 5 6 7)
Upper Spacer: 0,3 mm
Wheel Spacer: 0,5 mm
Drive Hub: [ ] TFW113(4.0) [X] LAW30R(4.5/Std.) [ ] TFW031(5.2)
Droop: [X] A 5 mm [ ] B
Upper Rod Position: [X] TF240/241(SP/Std.) [ ] TF207/208
Sus. Arm Spacer: Front 2 mm Rear 1 mm
Diff. Position: [ ] [X]
Ride Height: 5,2 mm
Sway Bar: 1,2mm
2 mm
Camber Angle: °
Sus. Holder Bush: Front (IN)/OUT E — Rear IN/(OUT) B
Sus. Holder Spacer: Front 0,75 mm — Rear 0,75 mm
Sus. Arm: [X] TF005H(Std.) [ ] TF226H
Sway Bar Holder: [X] Plastic(SP/Std.) [ ] Aluminum(TFW110)
Rear Diff.: [X] Gear(SP/Std.) [ ] Ball
Hub Carrier Spacer: Front 1 mm Rear 1 mm
Notes: #2000 diff oil.


Shock

	Front	Rear
Shock Oil:	3-hole	3-hole
Shock Spring:	#500 HPI Silver	#500 HPI Silver
Diaphragm:	std	std
Pressure Form:	/	/
Shock Length:	66 mm	66 mm



Steering Wiper:


Steering Spacer: 2 mm



Crank arm: [X] TF239(SP/Std.) [ ] TF216

Chassis

Center Plate: [ ] On [X] Off
Weight: ___ g
Weight: 15 g
Weight: ___ g
Weight: ___ g
Upper Plate: [X] TF235(SP/Std.) [ ] TF233
Chassis: [X] TF234(SP/Std.) [ ] TF232

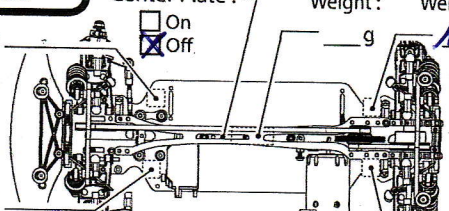

Tire

	Comments
Tire: Sorex 36	
Inserts: handout	
Wheel: handout.	
Traction Compound 1st: / 2nd: /	

Others

Motor: SP MMM4.5 — 2nd Gear Ratio: 1.83
Pinion/Spur: 16 / 36 — Gear Ratio: 8,16
Battery: GM — ESC: HW V3
Body: Mazdaspeed6 — Wing: Std.

Track Condition

[ ] Smooth [X] Bumpy [ ] Low Traction [X] Med. Traction [ ] High Traction
[X] Asphalt [ ] Concrete [ ] Carpet [ ] Indoor [X] Outdoor

Comment:

Ver.1.00