
TF6 SP 2 BELT DRIVE 4WD — SET UP SHEET — KYOSHO

Name: BEAUCHESNE F | Date: 15/16/2012 | Truck / City: LONGWY | Event: GP3F

Front Suspension

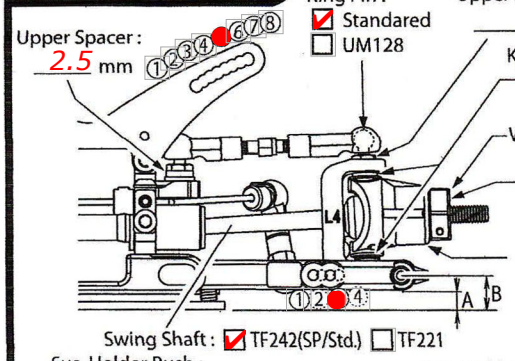

Upper Spacer: 2.5 mm

King Pin: ☑ Standared ☐ UM128

Upper Spacer: 0 mm

Knuckle Spacer: ☐ Upper ☑ Lower


Wheel Spacer: 0 mm

Knuckle: ☑ TF227(SP/Std.) ☐ TF224

Droop: ☑ A ☐ B 6 mm

Swing Shaft: ☑ TF242(SP/Std.) ☐ TF221


Upper Rod Position:



☑ TF240/241(SP/Std.) ☐ TF207/208

Drive Hub: ☐ TFW113(4.0) ☑ LAW30R(4.5/Std.) ☐ TFW031(5.2)

Diff. Position:



Sus. Arm Spacer: Front: 2 mm Rear: 1 mm

Knuckle Spacer: ____ mm


Ride Height: 5mm

Sus. Holder Bush: Front ☑ In / Out ____ ____ mm; Rear ☑ In / Out ____ ____ mm

Sus. Holder Spacer: ____ mm

Sus. Arm: ☑ TF005H(Std.) ☐ TF226H

Sway Bar Holder: ☑ Plastic(SP/Std.) ☐ Aluminum(TFW110)



Sway Bar: STK ____ mm


Camber Angle: 2°

Toe Angle: 0.5°

Front Diff.: ☑ Spool ☐ One Way ☐ Diff

Notes: ----------


Rear Suspension

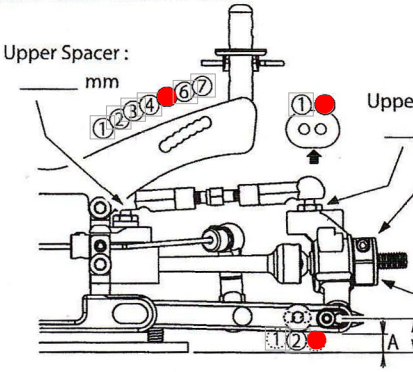

Upper Spacer: ____ mm

Upper Spacer: 0 mm

Upper Rod Position:



☑ TF240/241(SP/Std.) ☐ TF207/208


Wheel Spacer: ____ mm

Drive Hub: ☐ TFW113(4.0) ☑ LAW30R(4.5/Std.) ☐ TFW031(5.2)

Droop: ☑ A 5 mm ☐ B

Sus. Arm Spacer: Front 2.5 mm Rear 0.5 mm

Diff. Position:

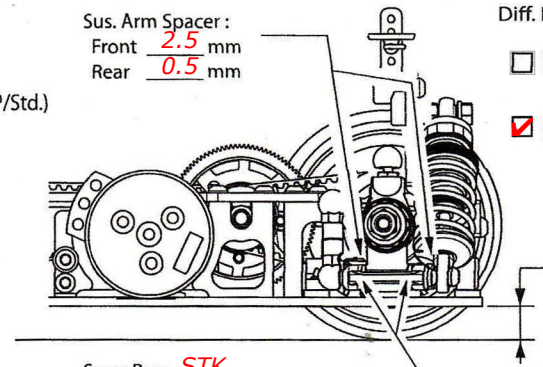

Ride Height: 5.5 mm

Sus. Holder Bush: Front ☑ IN / OUT ____ ____ mm; Rear ☐ IN / ☑ OUT ____ ____ mm

Sus. Holder Spacer: ____ mm

Sus. Arm: ☑ TF005H(Std.) ☐ TF226H

Sway Bar Holder: ☑ Plastic(SP/Std.) ☐ Aluminum(TFW110)

Sway Bar: STK ____ mm

Camber Angle: 2°


Rear Diff.: ☑ Gear(SP/Std.) ☐ Ball

Hub Carrier Spacer: Front 0 mm Rear 0 mm

Notes: OIL 1000


Shock

	Front	Rear
Piston:	2 HOLES	2 HOLES
Shock Oil:	# 400	# 400
Shock Spring:	YOK PINK	YOK BLUE
Diaphragm:		
Pressure Form:		
Shock Length:	66 mm	66 mm



Steering Wiper:

Steering Spacer: 1 mm



Crank arm: ☑ TF239(SP/Std.) ☐ TF216

Chassis


Center Plate: ☑ On ☐ Off

Weight: ____ g

Weight: 5 g

Weight: ____ g

Weight: ____ g

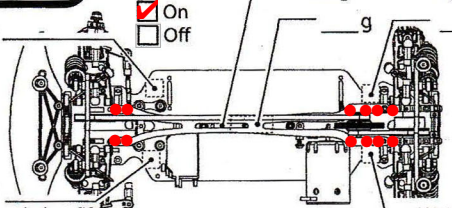

Weight: 10 g

Upper Plate: ☑ TF235(SP/Std.) ☐ TF233

Chassis: ☑ TF234(SP/Std.) ☐ TF232

Weight: ____ g

Tire

		Comments
Tire	CPX 30	----------
Inserts	STOCK	----------
Wheel	STOCK	----------
Traction Compound	1st: CS HIGH 2nd:	----------

Others

2nd Gear Ratio: 1.83

Motor: Z3R 10.5

Pinion/Spur: 33 / 102 Gear Ratio: 5.66

Battery: G6 6500 ESC: NOSRAM

Body: SPEED 6 Wing: STOCK

Track Condition

☑ Smooth ☐ Asphalt

☐ Bumpy ☐ Concrete

☐ Low Traction ☑ Carpet

☐ Med. Traction ☑ Indoor

☑ High Traction ☐ Outdoor

Comment:

J. Galineau / PetitRC.com

Ver.1.00