
TF7.7 2 BELT DRIVE 4WD **SETUP SHEET** — KYOSHO THE FINEST RADIO CONTROL MODELS

Name : Arnaud Julien | Date : 02/06/2019 | Track/City : AMO Montpellier | Event : Régionale Ligue 13

Front Suspension

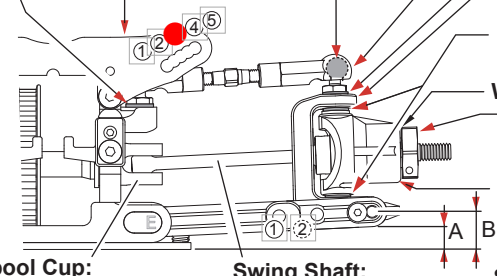

Upper Spacer : 1 mm


Shock Tower: ☑ TFW172 (Std) ☐ _____

King Pin: ☐ 97040 (Low) ☑ UM129 (Std)

Upper End: ☑ UM112H (Std) ☐ UM112

Upper Spacer: 0,5 mm

Hub Carrier: ☑ 4° (TF225H/Std) ☐ 6° (TF225-6H) ☐ _____

Upper Rod Position:  ☑ ☐

ST Servo Horn: ☑ Plastic(IF435/Std.) ☐ Aluminum (IFW448/F) (IFW449/S/K)

Sus. Arm Spacer: Front : 3 mm Rear : 0,5 mm

Crank Bridge: ☐ Use ☑ No Use

Knuckle Spacer: ☑ Upper ☐ Lower

Wheel Spacer: _____ mm

Diff. Position: ☐ ☑

Knuckle Spacer: 1 mm

Knuckle : ☐ TF243 (TF7/Std) ☐ TF237 (TF6SP)

Drive Hub : ☑ TFW113 (4.0/Std) ☐ LAW30R (4.5) ☐ TFW031 (5.2)

Droop : ☑ A ☐ B 6 mm

Ride Height: 5,2 mm

Spool Cup: ☐ TFW124 (Alu.) ☑ TF287 (Steel/Std)

Swing Shaft: ☑ TF272 (Std/TFW121) ☐ TFW122 (40.5mm)

Sus.Holder Bushing: Front ☐ In / ☑ Out E _____ mm; Rear ☐ In / ☑ Out E _____ mm

Sus. Holder Spacer:

Sus Arm: ☐ TF268-01B (L) ☑ TF279-01 (M/Std) ☐ TF280 (S)

Sus.Holder Type: ☑ TF212 (Separates/Std) ☐ TFW120 (Onepiece)

Sway Bar Holder: ☑ Plastic(TF269/Std./Cut) ☐ Plastic (TF269/Std./No Cut) ☐ Aluminum (TFW110)


Camber Angle: 2 °

Sway Bar: 1,3 — 15 mm

Toe Angle: ☐ In ☑ Out 1 °

Front Diff: ☑ Spool ☐ C-joint ☐ Pin ☐ One Way ☐ Gear Diff(Oil:#_____) (Oil Weight:_____g)


Rear Suspension

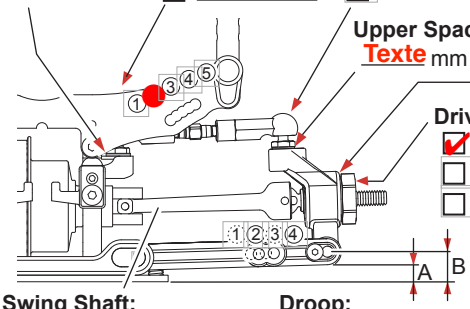

Upper Spacer : 1 mm

Shock Tower: ☐ TFW173 (Std) ☑ _____


Upper End: ☐ UM112H (Std) ☐ UM112

Upper Rod Position: 

Upper Spacer: Texte mm

Wheel Spacer: _____ mm

A.R.T.S.: Spacer / Outside: _____ mm



Spacer / Inside : _____ mm

Hub Carrier: ☐ 0° (TF225-0H) ☐ 4° (TF225H)

Diff Position: ☐ ☑

Sus Arm Spacer: Front 2,5 mm Rear 1 mm

Sus. Holder : ☐ TF266(Std) ☐ TF131

Drive Hub: ☑ TFW113 (4.0/Std) ☐ LAW30R (4.5) ☐ TFW031 (5.2)

Motor Height : ☐ Up ☑ Low

Ride Height: 5,4 mm

Swing Shaft: ☐ TFW032-01B (46) ☑ TF007-01 (43)

Droop: ☑ A ☑ B 5 mm

Sus. Arm: ☑ TF268-02 (L/Std.) ☐ TF279-02 (M) ☐ TF280 (S)

Sus.Holder Bushing: Front ☐ In / ☑ Out D _____ mm; Rear ☐ In / ☑ Out B _____ mm

Sus Holder Spacer:

Sus.Holder Type (F): ☑ TF286 (Separates/std.) ☐ TF212 (Separates) ☐ TFW120 (Onepiece)

Sway Bar Holder: ☑ Plastic (TF269/Std./Cut) ☐ Plastic (TF269/Std./No Cut) ☐ Aluminum (TFW110)

Sway Bar: 1,2 — 0 mm

Camber Angle: 2 °

Toe Angle: 2 °

Rear Diff: ☑ Gear Diff(Oil:# 7K) (Oil Weight:_____g) ☐ Ball Diff

Shock


☐ Hole _____ mm

	Front	Rear
Piston :	6x1,2	6x1,2
Oil :	2K	2K
Spring :	3.2	3
Diaphragm :	N	N
Pressure Form :	NONE	NONE
Lengh :	9,5 mm	9,5 mm
Outer Spacer :	_____ mm	_____ mm

Shock Type : ☑ W5307R (Std.) ☐ _____

Ackermann

Steering Spacer: 1,5 mm



Chassis: ☑ Carbon (TF281/Std) ☐ Aluminum (TFW177R/TFW177BK)


Chassis

Top Deck Screw: ☑ Steel(Std.) ☐ Titanium ☐ Aluminum

Front ☐ Rear ☐

Chassis Screws:

Battery Position: ☑ Front ☐ Rear

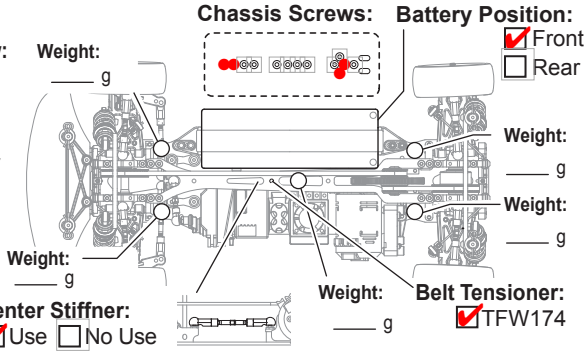

Weight: _____ g

Weight: _____ g

Weight: _____ g

Weight: _____ g

Weight: _____ g

Center Stiffner: ☑ Use ☐ No Use

Belt Tensioner: ☑ TFW174

Tires & Wheels

Tire: TEAM POWER FFVRC

Insert: TEAM POWER FFVRC

Wheel: TEAM POWER FFVRC

Additive 1st : Tire Tweak 2nd : CS

Others

2nd Gear Ratio : 1.90

Motor: REDS VX2 13.5T

Pinion/Spur _____ / _____ Gear Ratio 4.05

Battery: ORION 6800 ESC: REDS TX2

Body: ZOO DogsBollox Wing: _____

Track Condition

☑ Smooth ☐ Bumpy ☐ Low Traction ☐ Med Traction ☑ High Traction

☑ Asphalt ☐ Concrete ☐ Carpet ☐ Indoor ☑ Outdoor

Arn0 - PetitRC.com - Ver1.00

Comments

Top Deck prototype 2mm

Résult : P1