
Ultima RB5 MCS Mid Custom Special Setup Sheet

KYOSHO — Designed by Fabien Simonini

Name	Date	Truck / City	Event
CRAIG COLLINSON	29-30/08/2010	silverstone	SILVERSTONE WEEKENDER

Front Suspension

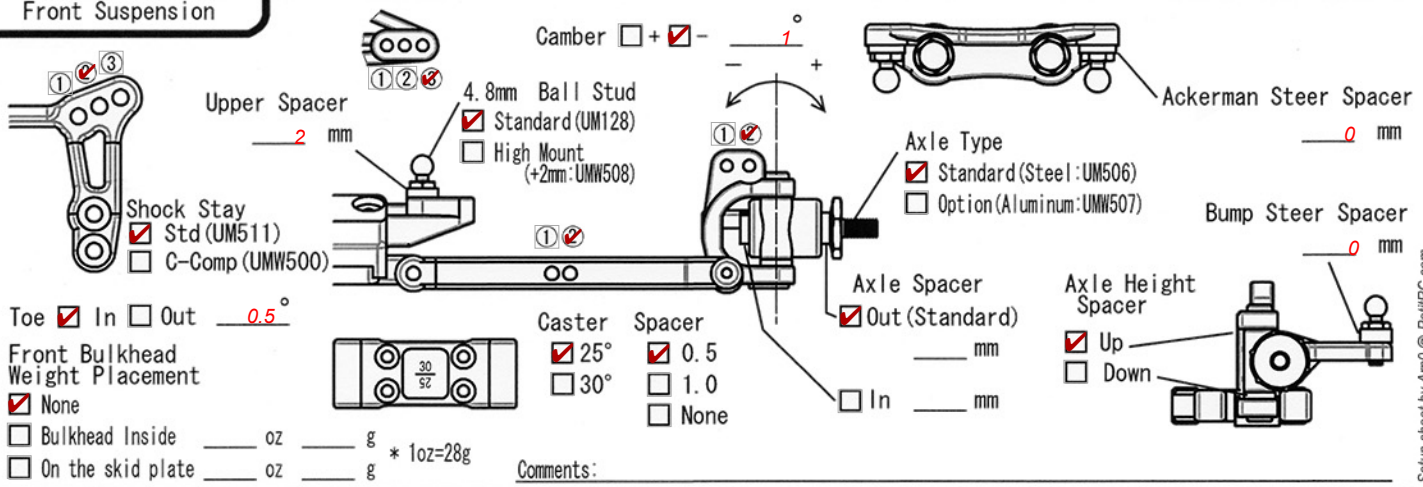

Camber ☐+ ☑− 1°

Upper Spacer 2 mm

4.8mm Ball Stud
- ☑ Standard (UM128)
- ☐ High Mount (+2mm: UMW508)

Ackerman Steer Spacer 0 mm

Axle Type
- ☑ Standard (Steel: UM506)
- ☐ Option (Aluminum: UMW507)

Shock Stay
- ☑ Std (UM511)
- ☐ C-Comp (UMW500)

Bump Steer Spacer 0 mm

Toe ☑ In ☐ Out 0.5°

Axle Spacer
- ☑ Out (Standard) ____ mm
- ☐ In ____ mm

Axle Height Spacer
- ☑ Up
- ☐ Down

Caster
- ☑ 25°
- ☐ 30°

Spacer
- ☑ 0.5
- ☐ 1.0
- ☐ None


Front Bulkhead Weight Placement
- ☑ None
- ☐ Bulkhead Inside ____ oz ____ g
- ☐ On the skid plate ____ oz ____ g

* 1oz=28g

Comments:

Setup sheet by Arn0 @ PetitRC.com

Rear Suspension

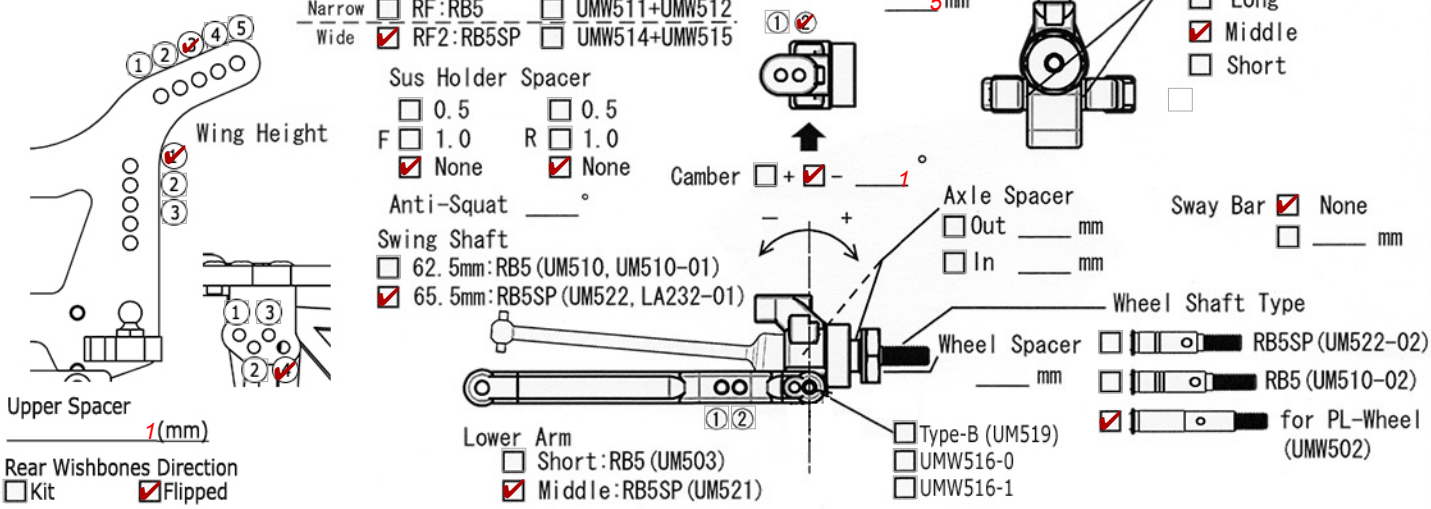

Lower Sus Holder

	Normal	Aluminum (Opt)
Narrow	☐ RF: RB5	☐ UMW511+UMW512
Wide	☑ RF2: RB5SP	☐ UMW514+UMW515

Upper Spacer 5mm

Wheelbase
- ☐ Long
- ☑ Middle
- ☐ Short

Sus Holder Spacer

F	☐ 0.5	R	☐ 0.5
	☐ 1.0		☐ 1.0
	☑ None		☑ None

Camber ☐+ ☑− 1°

Anti-Squat ____°

Axle Spacer
- ☐ Out ____ mm
- ☐ In ____ mm

Sway Bar ☑ None ☐ ____ mm

Swing Shaft
- ☐ 62.5mm: RB5 (UM510, UM510-01)
- ☑ 65.5mm: RB5SP (UM522, LA232-01)

Wheel Shaft Type

Wheel Spacer ____ mm

- ☐ RB5SP (UM522-02)
- ☐ RB5 (UM510-02)
- ☑ for PL-Wheel (UMW502)

Wing Height

Upper Spacer 1 (mm)


Rear Wishbones Direction
- ☐ Kit
- ☑ Flipped

Lower Arm
- ☐ Short: RB5 (UM503)
- ☑ Middle: RB5SP (UM521)
- ☐ Type-B (UM519)
- ☐ UMW516-0
- ☐ UMW516-1

Comments: 50 G LEAD ON THE BACK OF THE REAR SHOCK TOWER? 2 OUT OF 3 WASHERS ON THE PL AXLES MOVED FROM OUT TO IN FOR NARROW TRACK

Shock

	Front	Rear
Shock Piston	3-B	3-B
Shock Oil	#35	#30
Shock Spring	LIME GREEN	COBALT
Limiters	in ____ mm / out ____ mm	in ____ mm / out ____ mm
Shock Length (A)	____ mm	____ mm
Shaft Length (B)	____ mm	____ mm
Shock Top Type	☑ Std: RB5 ☐ Low: ZX5FS	☑ Std: RB5 ☐ Low: ZX5FS



Rear Shock Shaft
- ☐ STD: RB5SP (W5183-01) 50mm
- ☑ Opt: ZX5 (W5183-02) 54mm

Comments:

Body / Wing / Chassis


Body
- ☐ Zen
- ☑ X-6
- ☐ Other: ____

Front Wing: ____

Rear Wing: ____

Wing Angle
4° ☐ 7° ☐ 10° ☐

Weight Placement



- ☐ Front Brace Plate ____

T-Plate
- ☑ Stainless
- ☐ Carbon



Ride Height ☑ A ☐ B F 23 mm R 24 mm

Tire

	Front	Rear
Tire	FASTRAX MINI SPIKE	FASTRAX MINISPIKE
Inserts	SCHUM GRN	SCHUM GRN
Wheel		
Compound		

Others

gear ratio =2.6

- Motor 6.5
- Pinion/Spur 78 / 23
- Battery LRP
- ESC LRP

Truck Condition

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Truction
- ☐ Med. Truction
- ☐ Higt Truction
- ☐ Wet
- ☐ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groore
- ☐ Clay
- ☐ Dusty
- ☐ Other

Springs

#55	Orange
#60	Orange Yellow
#65	Yellow
#68	Blue
#70	Silver
#72	Cobalt blue
#75	Light Green
#80	Green

Comment : LEAD SHEET UNDER THE LIPO