
ULTIMA RB6 SET UP SHEET


KYOSHO — THE FINEST RADIO CONTROL MODELS

Name	Date	Truck / City	Event
Kevin Lee	03.03.2013	Stotfold	Club Meeting

Front Suspension




Upper Spacer: 0 mm




4.8mm Ball Stud:
- ☐ UM128 (Std)
- ☑ UMW508 (+2mm High Mount)

Camber: -1 °

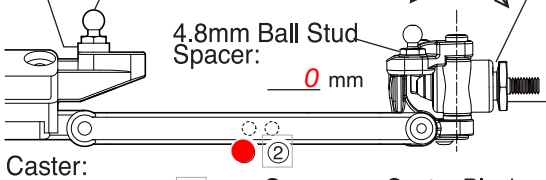

4.8mm Ball Stud Spacer: 0 mm




4.8mm Ball Stud:
- ☐ LA246 (-1mm Low Mount)
- ☑ UM129 (Std)

Ackerman Steer Spacer: 0 mm

Axle Spacer:
- ☐ Out 1 mm
- ☐ In 2 mm

Wheel Hub: ____ mm


Bump Steer Spacer: ____ mm



Axle Height Spacer:
- ☐ 1 mm
- ☐ 0.5 mm

Toe: ☐ In ☐ Out 0 °

Caster:



- ☐ 25°
- ☐ 30°
- ☐ A (UM502)
- ☑ B (UM721/Std.)
- ☐ C (UM567)

Spacer:
- ☐ 0.5
- ☑ 1.0
- ☐ None

Caster Block:
- ☑ 0°
- ☐ 2°
- ☐ 4°


Block position:
- ☐ IN
- ☐ OUT

Front Bulkhead Weight Placement:
- ☑ None
- ☐ Bulkhead Inside ___ oz ___ g
- ☐ On the skid plate ___ oz ___ g * 1oz=28g

Comments:

Wheelbase: F: 1 mm R: 1 mm


Rear Suspension



Sus Holder Spacer:

F
- ☐ 0.5
- ☐ 1.0
- ☐ None


R
- ☐ 0.5
- ☐ 1.0
- ☐ None



Type-B (UM519)
Type-B2 (UM519-2)

Anti-Squat: °

Upper Spacer: ____ mm




Wheelbase:
F: 0 mm
R: 2 mm

Wheelbase: F: NA mm R: NA mm

4.8mm Ball Stud:
- ☑ UM129 (Std)
- ☐ UMW508 (+2mm High Mount)
- ☐ 97050M

Sway Bar:
- ☑ None
- ☐ ____mm


Camber: -1 °

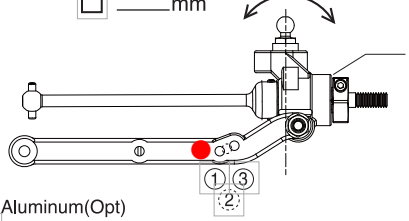

Axle Spacer:
- ☐ Out ____ mm
- ☐ In ____ mm

Rear Hub add Toe:
- ☑ 0°Type-B (UM519)
- ☐ 0°Type-B2 (UM519-2)
- ☐ 0°Alu (UMW516-0)
- ☐ 0.5°Alu (UMW516-05)
- ☐ 1°Alu (UMW516-1)

RR:



Upper Spacer: 2 mm

Mid:



Lower Sus Holder:

	Normal	Aluminum(Opt)
Narrow	☐ RF	☐ UMW511+UMW512
Wide	☑ RF2	☐ UMW514+UMW515


Comments: RB5 Rear Wishbone with extra shock hole

Motor Position
- ☐ Rear Motor
- ☑ Midship Motor

Diff.
- ☐ Gear Diff. #
- ☑ Ball Diff.

Shock

	Front	Rear
Shock Piston:	3B	3B
Shock Oil:	#550cst	#300cst
Shock Spring:	Silver	Yellow
Limiters:	in NA mm out NA mm	in NA mm out NA mm
Shock Length(A):	83 mm	99 mm
Shock Length(B):	____ mm	____ mm
Shock Length(C):	____ mm	____ mm




Ball End type:

	S	M	L
Front:	☐	☑	☐
Rear:	☐	☐	☐

Chassis

Screw: ☑ ☑ ☑

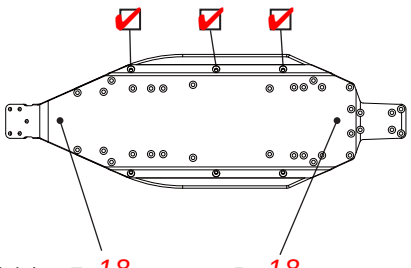

Ride Height: F 18 mm R 18 mm

Battery Position

Battery Type:
- ☑ Straight
- ☐ Separate
- ☐ Short

Battery Placement:
- ☐ Front
- ☐ Rear

Middle rudebits shorty craddle

Tire

	Front	Rear
Tire:	Cut Stagger	Mini Spike
Inserts:	None	Answer Blue
Wheel:	Cut 5029W	5202W
Traction Compound:	Yellow compound	

Electronics

Motor: Redline Gen 2
Pinion/Spur: 26 / 76
Battery: Orion Shorty
ESC: Tekin RS Pro

Truck Condition

- ☐ Smooth
- ☑ Bumpy
- ☐ Low Truction
- ☐ Med. Truction
- ☑ Higt Truction
- ☐ Wet
- ☑ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groore
- ☐ Clay
- ☐ Dusty
- ☑ Other Astro

Wing

Rudebite R1

- ☐ Blast-S
- ☐ Blast-L
- ☐ Step-S
- ☐ Step-M
- ☐ Step-L
- ☐ Step 2.0

Wing Mount :
- ☐ Narrow
- ☐ Wide

Wing Angle :
- ☑ 4°
- ☐ 7°
- ☐ 10°

Lip : 4mm

Comment

Editable by Arn0 at Petitrc.com

80g rudebits short weights under LiPo
Small bore shocks used

Ver.1.00