
ULTIMA RB6 SET UP SHEET

KYOSHO THE FINEST RADIO CONTROL MODELS

Name	Date	Truck / City	Event
Matthew Latham	13/01/13	chadderton indoors	round 4

Front Suspension




Upper Spacer: 2 mm




4.8mm Ball Stud: ☑ UM128 (Std) ☐ UMW508 (+2mm High Mount)

Camber: -1 °

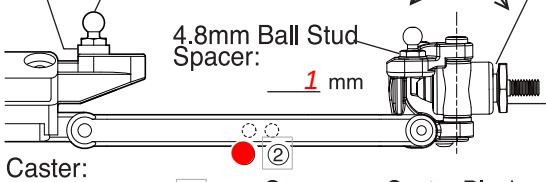

4.8mm Ball Stud Spacer: 1 mm

Axle Spacer: ☐ Out 2 mm ☐ In 1 mm




4.8mm Ball Stud: ☐ LA246 (-1mm Low Mount) ☑ UM129 (Std)

Ackerman Steer Spacer: 0 mm

Wheel Hub: ____ mm

Bump Steer Spacer: 1 mm

Axle Height Spacer: ☐ 1.6 mm ☐ 0 mm



Toe: ☐ In ☐ Out 0 °

Caster: ☐ 25° ☑ 30°

Spacer: ☑ 0.5 ☐ 1.0 ☐ None

Caster Block: ☑ 0° ☐ 2° ☐ 4°

Block position: ☑ IN ☐ OUT


Front Bulkhead Weight Placement: ☐ None ☐ Bulkhead Inside ___ oz ___ g ☐ On the skid plate ___ oz ___ g * 1oz=28g

☐ A (UM502) ☑ B (UM721/Std.) ☐ C (UM567)


Comments: 80grms under battery

Wheelbase: F: 2 mm R: 0 mm

Rear Suspension




Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☑ None R ☐ 0.5 ☐ 1.0 ☑ None



Type-B (UM519) Type-B2 (UM519-2)

Anti-Squat: 2°

Upper Spacer: 2 mm




Wheelbase: F: 2 mm R: 2 mm

Wheelbase: F: 0 mm R: 2 mm

4.8mm Ball Stud: ☑ UM129 (Std) ☐ UMW508 (+2mm High Mount) ☐ 97050M

Sway Bar: ☑ None ☐ ____mm

Camber: 2°

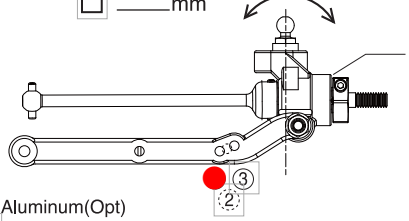

Axle Spacer: ☐ Out ____ mm ☐ In ____ mm

Rear Hub add Toe: ☐ 0°Type-B (UM519) ☐ 0°Type-B2 (UM519-2) ☑ 0°Alu (UMW516-0) ☐ 0.5°Alu (UMW516-05) ☐ 1°Alu (UMW516-1)

RR: Upper Spacer: ____ mm

Mid: Lower Sus Holder: Normal / Aluminum(Opt)

Narrow ☐ RF ☐ UMW511+UMW512

Wide ☐ RF2 ☑ UMW514+UMW515

Comments:

Motor Position

☐ Rear Motor ☑ Midship Motor


Diff.

☐ Gear Diff. # ____

☑ Ball Diff. tight

Shock


	Front	Rear
Shock Piston:	5 hole kit	5 hole kit
Shock Oil:	#40	#30
Shock Spring:	green losi	pink losi
Limiters:	in 0 mm out 0 mm	in 0 mm out 0 mm
Shock Length(A):	____ mm	____ mm
Shock Length(B):	21 mm	____ mm
Shock Length(C):	____ mm	____ mm



Ball End type: Front: ☑ S ☐ M ☐ L Rear: ☐ S ☐ M ☑ L

Chassis

Screw: ☑ ☑ ☑

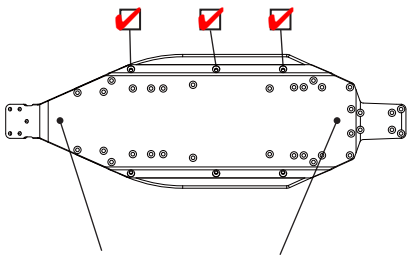

Ride Height: F 19 mm R 18 mm

Battery Position

Battery Type: ☐ Straight ☑ Separate ☐ Short

Battery Placement: ☑ Front ☐ Rear

Tire

	Front	Rear
Tire:	terra bytes	terra bytes
Inserts:	med	med
Wheel:	wide	std
Traction Compound:		

Electronics

Motor: 7.5 hpi

Pinion/Spur: 25/78

Battery: gm5600/60c

ESC: hpi flux

Truck Condition

☑ Smooth ☑ Bumpy ☑ Low Truction ☑ Med. Truction ☐ Higt Truction ☐ Wet ☑ Dry

☐ Sandy ☐ Soft Dirt ☐ Grass ☐ Blue Groore ☐ Clay ☐ Dusty ☑ Other

Wing

☐ Blast-S ☐ Blast-L ☐ Step-S ☐ Step-M ☐ Step-L ☐ Step 2.0

Wing Mount : ☐ Narrow ☑ Wide

Wing Angle : ☑ 4° ☐ 7° ☐ 10°

Lip : 5mm

Comment

Editable by Arn0 at Petitrc.com

ran costello weights and front brace all day

results 2nd in amain/2nd overall

Ver.1.00