INFERNO MP11e SETUP SHEET ver.1.00

KYOSHO

Driver	Date	Track	Event	Spur Gear	Pinion Gear
Reno Savoya	12/04/26	Modélisme Agathois	French nats Rd2	59T	20T

Motor	ESC	Battery	Tire	Tire Insert	Wheel	Body
Konect G2 1900kv	☑ Front ☐ Rear Konect K8 Elite	☑ Short ☐ Middle Gens Ace 6500mAh	Tire: Matrix Stardust Compounds: US	Matrix	Matrix	MP11e

Differential Gear Setup


	Front	Center	Rear
	☑ 10/20 ☐ 12/18 ☐ LSD	☑ 10/20 ☐ 12/18 ☐ LSD	☑ 10/20 ☐ 12/18 ☐ LSD
Diff. Gear	Ring Gear ☑ 43/13 ☐ 42/12 — 50 000 #	Diff. Size ☑ Small ☐ Large — 20 000 #	Ring Gear ☑ 43/13 ☐ 42/12 — 5 000 #
Diff. Position	☑ Low ☐ Mid. ☐ High	☑ Low ☐ High	☐ Low ☐ Mid. ☑ High

Shock Setup


	Front	Rear
Shock Type (P : w/Diaphragm A : Aeration)	Size / type	Size / type
Shock Piston (B : Black W : White T : Taper)	8x1,2T	8x1,3mmB
Shock Oil	450	700
Shock Spring	Black 72mm	Black 86mm
Shock Length (Ball to Ball)	Droop +2mm mm	Droop -4mm mm

Front

Suspsension Holder Bush

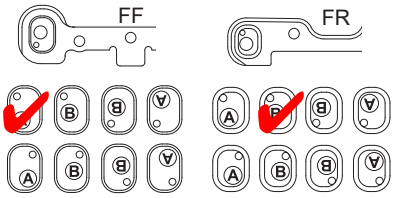


Wheel Nut




Wheel Hub
- ☐ Narrow
- ☑ Standard
- ☐ Wide

Camber

-2 deg.

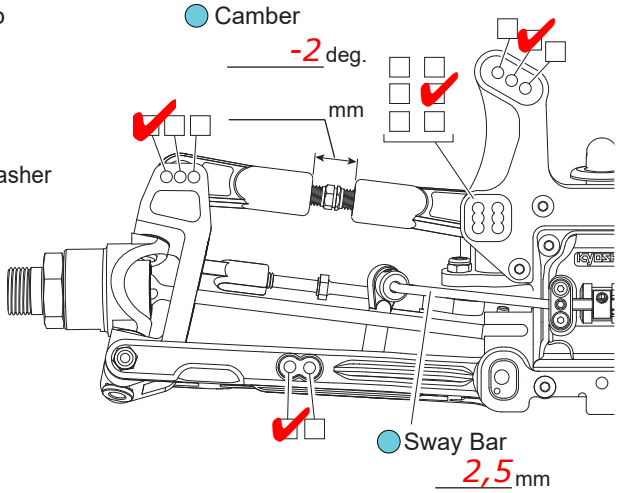


Spacer




1 mm 2 mm

Hub Carrier Washer




Steering Plate



Servo Saver Bush

Tie Rod



-2° toe mm

Sway Bar

2,5 mm


Universal Swing Shaft
- ☑ Std. (Cap Type)
- ☐ Other _____

Suspension Arm Plate
- ☐ None ☑ Upper ☒ Lower


Servo Horn
- ☐ AL. 18.5mm ☐ Plastic
- ☑ AL. 20.5mm

Rear

Suspension Holder Bush

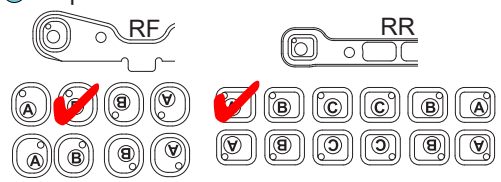


Wheel Nut




Wheel Hub
- ☐ Narrow
- ☑ Standard
- ☐ Wide

Camber

-2 deg.

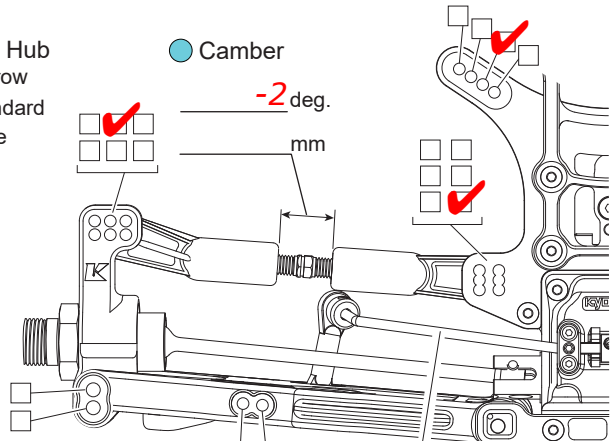


Wheelbase



2 mm 3 mm

Torque Rod Plate
- ☐ Plastic
- ☑ Carbon
- ☐ None



Torque Rod Bush
- ☑ Plastic
- ☐ Rubber

Servo Horn
- ☐ Plastic
- ☐ AL.

Universal Swing Shaft
- ☑ Std. (Cap Type)
- ☐ Other _____


Suspension Arm Plate
- ☐ None ☑ Upper ☒ Lower

Sway Bar

2,8 mm


Other

Chassis Height




Front 23 mm Rear 29 mm

Chassis Weight

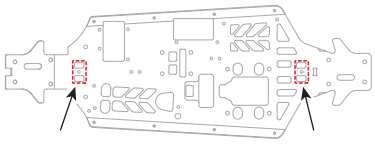


g g

Battery Position



Wing
- ☑ Plastic ☐ PC



13 mm

Wing Position: ☑ Front ☐ Rear

Wing Spacer: _____

☐ Wing Holder

10°c temp, front and rear arms with top and bottom carbon fiber arm stiffeners

MEMO