SP2 SETUP SHEET — RCMAKER

DRIVER	Thorsten Lewandowsk	DATE	13 / 09 / 26	BEST LAP	18,0	LAYOUT	■ TECHNICAL ☐ MIXED ☐ FLOWING
TRACK	Arena33	CLASS	Modified	BEST RUN	13	4 : 7.753	TEMP TRACK c / AIR 20 c
EVENT	ETS Rd.3 2026	RESULT	QUALIFYING / FINALS	SURFACE	Asphalt	TRACTION	☐ LOW ■ MEDIUM ☐ HIGH

TRANSMISSION

FRONT		REAR	
DRIVE	■ SPOOL ☐ DIFF	DIFF OIL	5K cst
OIL (ONLY IF USING DIFF)		DIFF OIL WEIGHT	1.5 g
PITCH	■ 64 ☐ 48	BELTS	☐ LF ☐ STD ■ HD
SPUR	110	PIN	29
FDR	7.21		

SHOCKS

FRONT		REAR
4.50 coils	SPRING	4.0 coils
500 CST ■ OIL WT ☐	OIL	550
■ STD	PISTON	■ STD
☐ PRG ■ LIN	BODY	☐ PRG ■ LIN
6.9 mm	LENGTH	6.9 mm

TIRES

TIRES	D36		
ADDITIVE	V3		
ADDITIVE TIME	Fr 25 min/Rr	25	min
WARMER TIME	Fr 20 min/Rr	20	min
WARMER TEMP	Fr 80 deg/Rr	80	deg

BODY


TYPE	Zenith				
WEIGHT	grams	THICK	■ 0.4	☐ 0.5	☐ 0.7
WING TYPE	Twister	THICK	☐ 0.4	■ 0.5	☐ 0.7
POSITION (LOWER WINDSCREEN MOLD LINE TO CENTRE FRONT BODY POST)	60.5 mm				
HEIGHT (FROM GROUND AT RIDE HEIGHT)	mm	WING	mm		

ELECTRONICS

RADIO	FlySky Noble	ST. EXPO	-13 %
SERVO	GTS-2		
ESC	Cayote Crest Evo X		
MOTOR	Cayote Modi 5T		
BATTERY	Cayote 6300		


NOTES

FRONT

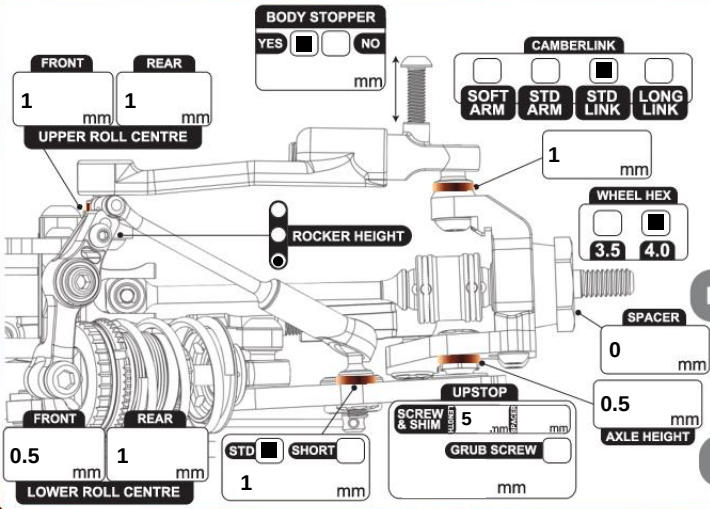


CAMBER	-2	deg			
CASTER	4	deg			
TOE OUT	1	deg			
RIDE HEIGHT	5	mm			
DROOP	☐ ARM ■ AXLE	23.6	mm		
DIFF HEIGHT	■ LOW	☐ HIGH			
ANTI ROLL BAR	☐ 1.0 ☐ 1.1 ☐ 1.2 ■ 1.3				
STEERING LOCK	16 deg (INSIDE)	16 deg (OUTSIDE)			

REAR

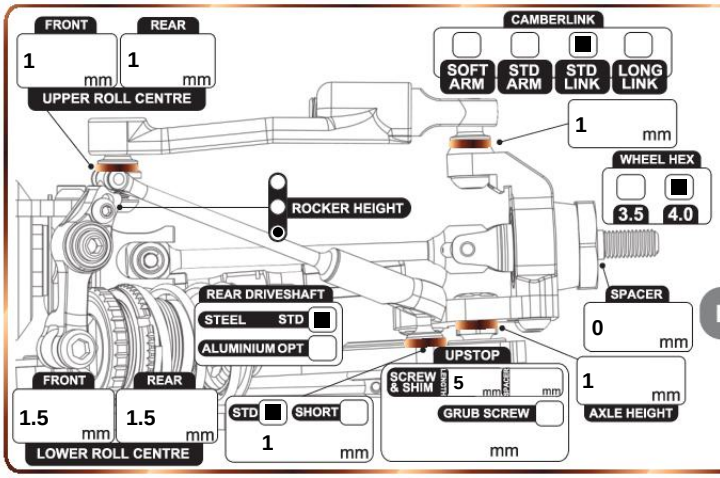

CAMBER	-2	deg			
CASTER	0.5	deg			
TOE IN	3	deg			
RIDE HEIGHT	5.2	mm			
DROOP	☐ ARM ■ AXLE	22.6	mm		
DIFF HEIGHT	■ LOW	☐ HIGH			
ANTI ROLL BAR	☐ 1.0 ☐ 1.1 ■ 1.2 ☐ 1.3				

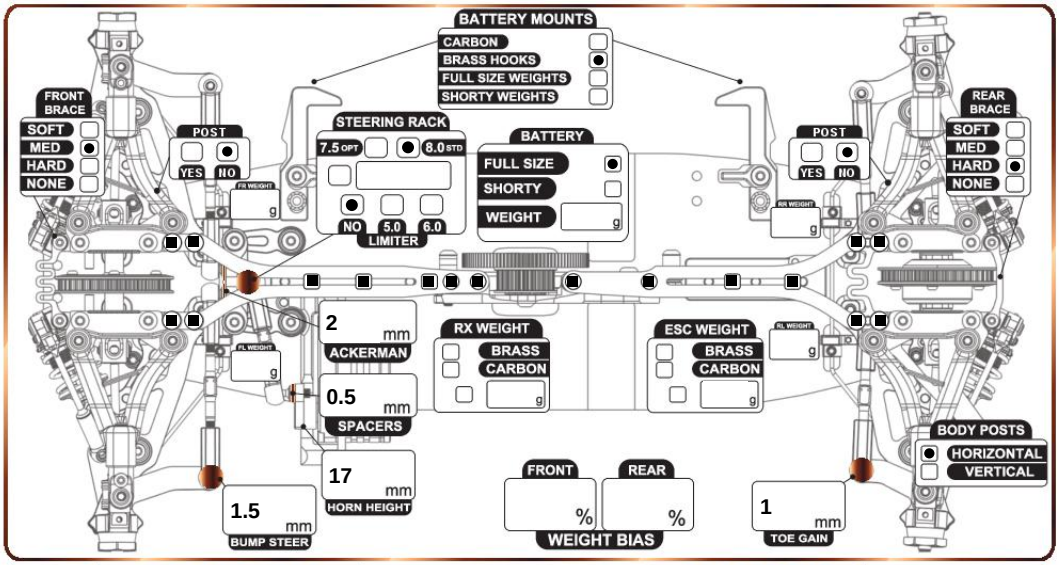

TOPDECK

FRONT — TYPE ☐ 1 PC ■ 2 PC — REAR

THICKNESS: mm / mm

MATERIAL: ■ C/F ☐ FRP / ■ C/F ☐ FRP

BRACE: ☐ CUT ■ FLEX ☐ SOLID

CHASSIS

FRONT — MOTORMOUNT — REAR

STIFFENER: ☐ BRASS ☐ CARBON

CHASSIS TYPE: ☐ 2.2MM CARBON ☐ 1.5MM ALUMINIUM ■ 1.2MM SPRING STEEL ☐ OTHER

STIFFENER: ☐ CARBON ☐ BRASS ☐ TENSIONER