TEN-LOSI RACING SETUP SHEET JR8

Name: Tony Clem Date: Event:

City: State: Track:

Track Conditions: ■ Indoor ❑ Tight ❑ Asphalt ❑ Sealed ❑ Low Bite / ❑ Outdoor ■ Open ■ Carpet ❑ Concrete ■ Smooth ■ Med Bite ❑ Rough ❑ High Bite

Front Suspension

Toe: .5
Ride Height: 4.5mm
Camber: -1.5
Kick/Anti-Dive: 0
Caster: 6
Droop: .5mm Above Ride Height
Front Pivot: ■ 0º ❑ 1º ❑ 2º
Roll Center: Low
Arm Spacing: Middle
Shock Position: 1
Steering Rack: 2
Spindle Ackerman: 1
Camber Link: 1
Camber Ball Stud: Tall
Sway Bar: No

Up Travel: NA
Arm Length: ❑ Short ■ Long


Front Drivetrain

Front Drive: ❑ Spool ❑ One-way ■ Diff
Grease Type: Losi Brown
Pulley: ❑ 41 ■ 42
Diff Height: ■ High ❑ Low
Drive Axle: LCD
Hex Width: ■ .165 stk. ❑ .195 ❑ .225


Shocks

Oil: 50
Oil Brand: Losi
Piston: 57
Spring: 25
Bladder: Black
Above Bladder: 0 O-Ring


"JR" Link
❑ High
❑ Low



0 # of Washers Under Ball Stud
NA Size Of Washer
Long Type of Ball Stud



3 # of Washers Under Ball Stud
.030" Size Of Washer
Long Type of Ball Stud



Rear Suspension

Toe: 2
Ride Height: 4.5mm
Droop: 1mm Above Ride Height
Camber: -2.0
Anti/Pro Squat: 0
Hub: ■ STD. ❑ Offset ❑ 0º ❑ 1/2º ❑ 1º ❑ 2º
Rear Pivot: ❑ 0º ■ 1º ■ 2º
Roll Center: Low, Raised .030"
Arm Spacing: Middle, See Notes
Shock Position: 3/Outside
Camber Link: 5/A
Camber Link Ball Stud: Tall
Sway Bar: No


Up Travel: NA
Arm Length: ❑ Short ■ Long

Rear Drivetrain


Diff Height: ❑ High ■ Low
Drive Axle: RCD
Hex Width: ■ .165 stk. ❑ .195 ❑ .225

Shocks

Oil: 50
Oil Brand: Losi
Piston: 56
Spring: 20
Bladder: Black
Above Bladder: 0 O-Ring

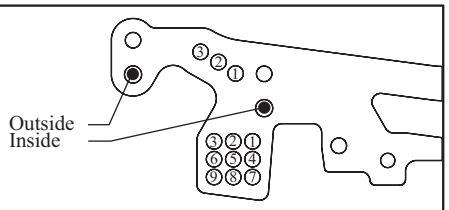

1 # of Washers Under Ball Stud
.030" Size Of Washer

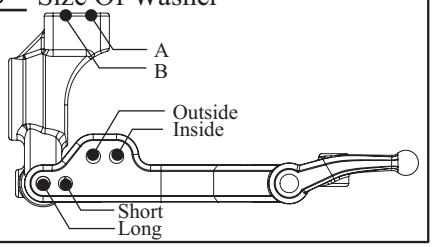

Body: Parma Mohawk
Wing: Back
FR Body Hole: 3
RR Body Hole: 3 ❑ Inside ■ Outside
5th Body Hole:
Body Height:




Motor: Novak 13.5
Turns:
Brushes:
Springs:
Timing:

Spur Gear: 112
Pinion Gear: 50
Ratio:
Roll Out:
Fans:


Servo: Futaba S9451
ESC: Novak GTB
Receiver: Futaba R203HF
Battery: Orion 4800 Li-Po
Transponder Location: Under Front Diff

Tires:	Brand/Compound	Size (mm)	Insert	Wheel	Tire Warmers
Front:	Parma PRO 53 Magenta	57	NA	NA	❑ YES NA Temp °F or ℃
Rear:	Parma PRO 53 Magenta	57	NA	NA	■ NO

Tire Additive



Shade areas where additive was applied

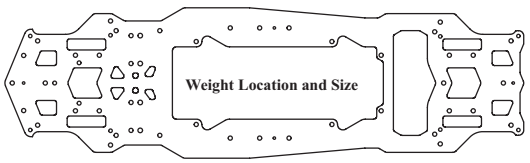

NOTES:
Shock Length Front 64mm, Rear 65.3mm.
Rear arms middle, .030" spacer in front and rear.