# TEN-SCT RACING SETUP SHEET JR8

Name: Todd Hodge Date: 2007 Event: Reedy Race

City: State: Track:

Track Conditions: ❑ Indoor ❑ Outdoor ❑ Tight ❑ Open ❑ Asphalt ❑ Concrete ❑ Carpet ❑ Sealed ❑ Smooth ❑ Rough ❑ Low Bite ❑ Med Bite ❑ High Bite

## Front Suspension

Toe: 1/2 Toe Out
Ride Height: 5mm
Camber: -1
Kick/Anti-Dive: 0
Caster: 4
Droop: 3.5mm above ride height
Front Pivot: ■ 0º ❑ 1º ❑ 2º
Roll Center: High
Arm Spacing: Middle
Shock Position: #1
Steering Rack: #2
Spindle Ackerman: #1
Camber Link: Jr Link / #1
Camber Ball Stud:
Sway Bar: .040"

Up Travel:
Arm Length: ❑ Short ■ Long


### Front Drivetrain

Front Drive: ■ Spool ❑ One-way ❑ Diff
Grease Type:
Pulley: ❑ 41 ■ 42
Diff Height: ■ High ❑ Low
Drive Axle: Lcd
Hex Width: ■ .165 stk. ❑ .195 ❑ .225


### Shocks

Oil: 40wt
Oil Brand: Losi
Piston: #56
Spring: 15
Bladder: Black
Above Bladder: Tamiya Red Foam


"JR" Link
❑ High
■ Low




0 # of Washers Under Ball Stud
0 Size Of Washer
Std. Type of Ball Stud




0 # of Washers Under Ball Stud
0 Size Of Washer
Std. Type of Ball Stud




## Rear Suspension

Toe: 3
Ride Height: 5mm
Droop: 3.5mm above ride height
Camber: -1
Anti/Pro Squat: 0
Hub: ■ STD. ❑ Offset ■ 0º ❑ 1/2º ❑ 1º ❑ 2º
Rear Pivot: ❑ 0º ❑ 1º ■ 2º
Roll Center: Low
Arm Spacing: Back
Shock Position: #1 / Outside
Camber Link: 5 / B
Camber Link Ball Stud: Short Neck
Sway Bar: .030"


Up Travel:
Arm Length: ❑ Short ■ Long

### Rear Drivetrain


Diff Height: ❑ High ■ Low
Drive Axle: Rcd
Hex Width: ■ .165 stk. ❑ .195 ❑ .225

### Shocks

Oil: 35wt
Oil Brand: Losi
Piston: #56
Spring: 12.5
Bladder: Black
Above Bladder: Tamiya Red Foam

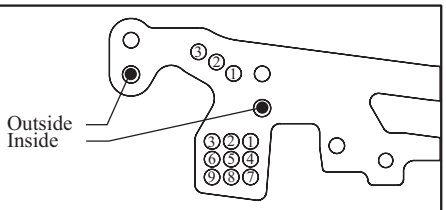


0 # of Washers Under Ball Stud
Size Of Washer

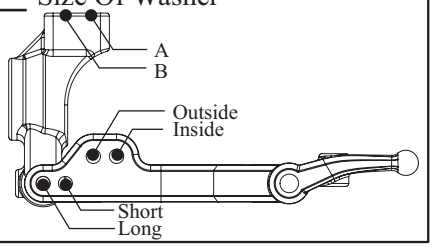


Body: PfF Mazda Speed 6
Wing: Std.
FR Body Hole: 6
RR Body Hole: 6 ❑ Inside ■ Outside
5th Body Hole: no
Body Height:




Motor: Orion Brushless
Turns: 3.5
Brushes: N/A
Springs: N/A
Timing:


Spur Gear: 128
Pinion Gear: 29
Ratio: 8.07
Roll Out:
Fans: No

Servo: JR 8800S
ESC: Novak GTB
Receiver: Spektrum 3500
Battery: 5 Cell
Transponder Location: Next to RX


| Tires: | Brand/Compound | Size (mm) | Insert | Wheel |
|---|---|---|---|---|
| Front: | Takeoff RP 30 | | | |
| Rear: | Takeoff RP 30 | | | |

Tire Warmers: ■ YES 60 Temp °F or ℃ ❑ NO

Tire Additive




Shade areas where additive was applied

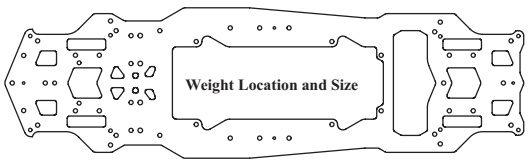


NOTES:
Clean tyres with FX2. Sauce with Tire Tweak for 30 minutes Tire Warmers.
Wipe Clean, apply FX2 for 10 minutes with tire warmers.
Wipe Clean, go Run.

1/4 oz at front of chassis