SETUP SHEET

Driver: Hodge

Date: 7-28-02

Track: MHOR R/C-ROAR Nationals

☐ Indoor ☒ Outdoor

☐ Tight / ☒ Open

☐ Carpet ☐ Concrete ☒ Asphalt

☒ Sealed ☒ Smooth ☐ Rough

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Droop Height: 1/2mm

Pivot Support: 2F mounted in LRC holes

Toe ☐ In ☒ Out 1/2

Ride Height 5mm

Camber ☒ - ☐ + 1

☒ Kickup 0

Caster ☒ Carrier 4


Sway Bar ☐ No ☒ Yes size .055

Arm Spacing
☒ FWD
☐ MDL
☐ BACK

Front Drive:
☐ Diff
☒ One-Way

Pulley

☒ Standard	42F	42R
☐ Overdrive	41F	42R
☐ Underdrive	42F	41R

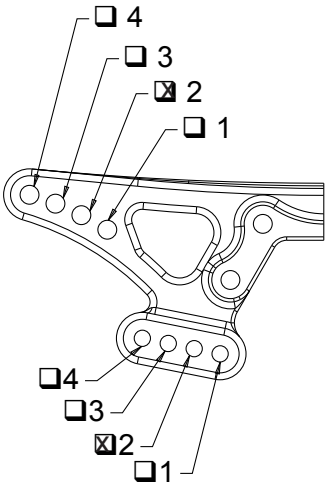

# of washers under steering/ tie-rod ball studs

Spindle ball stud: 0

Bellcrank ball stud: .060

Front Shocks
Oil: 35 Shock Lgth-61.5mm
Piston: 57 ☒ Standard / ☐ Drilled
Spring: Blue
Limiters: ☐ Inside _____ ☐ Outside _____

NOTES: Mid front roll center. Used Trinity washers (.070)

REAR SUSPENSION

Droop Height: 4mm

Pivot Support: 0R

Toe ☒ In ☐ Out 2(Stock)


Ride Height 5mm

Camber ☒ - ☐ + 1

☐ No
Sway Bar ☒ Yes size .055

Arm Spacing
☐ FWD
☒ MDL
☐ BACK

Used Ti-Ball Stud ☒ B ☐ A

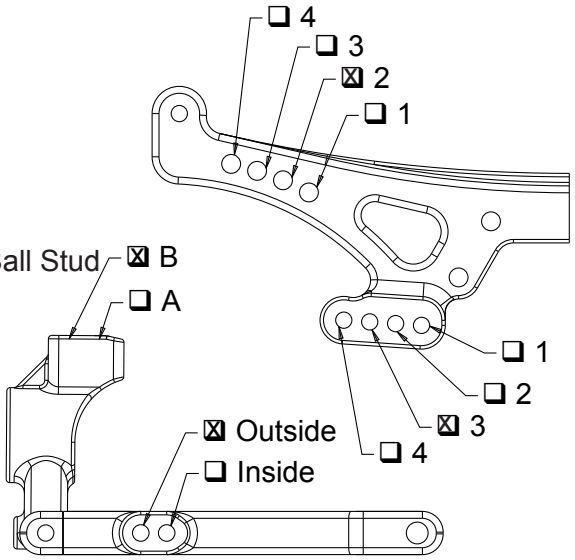

Rear Shocks
Oil: 30 Shock Lgth-66.1mm
Piston: 56 ☒ Standard / ☐ Drilled
Spring: Blue
Limiters: ☐ Inside _____ ☐ Outside _____

NOTES: Low Roll Center

Tires:

	Compound	Foam	Length
Front: Sorex 36R (Handout)			
Rear: Sorex 36R (Handout)			

Battery Placement: ☐ Back ☒ Forward ☐ Other:

Transponder Position: Behind Servo

Notes: Motor-16 Gauge 10x1, 20 Timing, Solid Can. Body Mounts-F-6 Body Clip, R-1 Body Clip. Used wd-40 for tire sauce. Standard Hexes,

Motor: 10x1D1

Pinion: 29

Spur: 128

Tire Diameter:

Body: Losi Alfa

Body Height: 117mm