# SETUP SHEET

Driver: Matt Francis

Date: July 29, 2001

Track: Speedworld Ca ROAR Nats

q Indoor
x Outdoor

q Tight / x Open

q Carpet
q Concrete
x Asphalt

q Sealed
x Smooth
q Rough

## FRONT SUSPENSION

(Circle or Check the Appropriate Settings)

Toe q In x Out 1

Ride Height 5mm

Camber x - q + 1/2

q Kickup 0

Caster x Carrier 4

Sway Bar x No q Yes size


Droop Height: 3

Pivot Support: 0

Arm Spacing
x FWD .030
q MDL
q BACK

Front Drive:
x Diff
q One-Way

x Standard
q Overdrive
q Underdrive

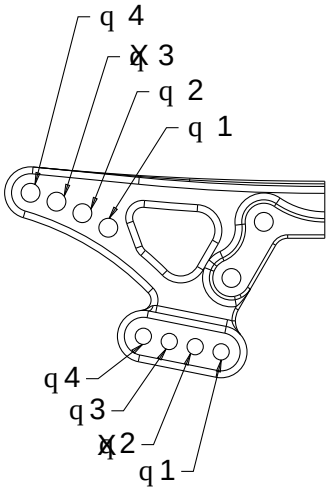


# of washers under steering/ tie-rod ball studs

Spindle ball stud: 0

Bellcrank ball stud: 0

Front Shocks
Oil: 50
Piston: 56 x Standard / q Drilled
Spring: Purple
Limiters: q Inside 0 q Outside 0

NOTES: Steel CVD's

## REAR SUSPENSION

x In
Toe q Out 2

Ride Height 5mm

x -
Camber q + 1/2


q No
Sway Bar q Yes size

Droop Height: 5

Pivot Support: 0

Arm Spacing
q FWD
x MDL
q BACK

Titanium Ball
Stud No Washers
Trim Top of Ball Cup
For Clearance

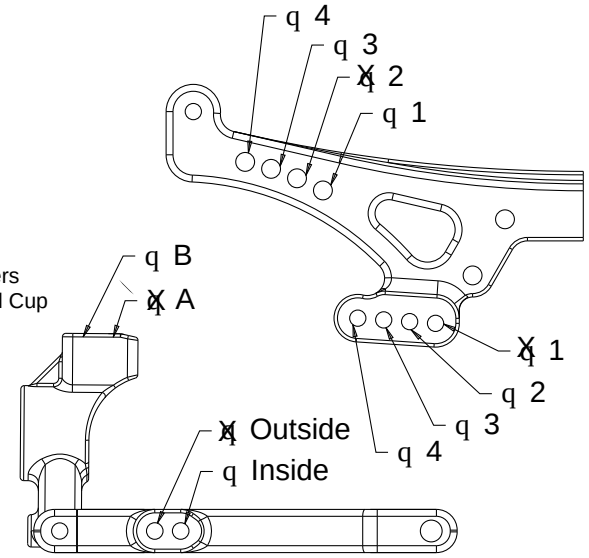


Rear Shocks
Oil: 50
Piston: 55 x Standard / q Drilled
Spring: Purple
Limiters: q Inside 0 q Outside 0

NOTES: Steel CVD's

| Tires: | | Compound | Foam | Length |
|---|---|---|---|---|
| Front: | Sorex 36R | | Yok Firm | |
| Rear: | Sorex 36R | | Yok Firm | |

Battery Placement: q Back x Forward q Other:

Transponder Position: Behind Servo

Notes:

Motor: Trinity 9x2

Pinion: 20

Spur: 88

Tire Diameter:

Body: Andy's Stratus

Body Height: