# SETUP SHEET

Driver: Andrew Gray

Date: 10/6/02

Track: Octoberfast

☒ Indoor ❑ Outdoor

❑ Tight / ☒ Open

☒ Carpet ❑ Concrete ❑ Asphalt

❑ Sealed ☒ Smooth ❑ Rough

## FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Droop Height: 3mm

Pivot Support: 0F mounted in LRC holes

❑ In
Toe ❑ Out 0

Ride Height 3mm

☒ - RF-1.2 LF-1.0
Camber ❑ + _____

❑ Kickup -3


Caster ❑ Carrier 6

❑ No
Sway Bar ☒ Yes size .080

Arm Spacing
☒ FWD
❑ MDL
❑ BACK

Front Drive:
☒ Diff
❑ One-Way

| Pulley | | |
|---|---|---|
| ☒ Standard | 42F | 42R |
| ❑ Overdrive | 41F | 42R |
| ❑ Underdrive | 42F | 41R |

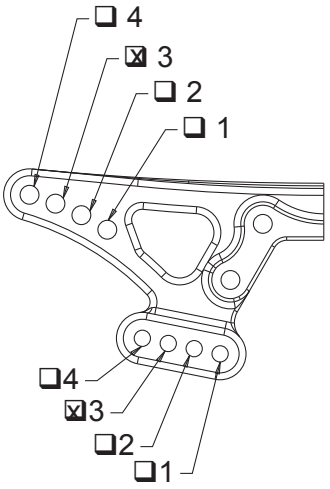


# of washers under steering/ tie-rod ball studs
Spindle ball stud: 0

Bellcrank ball stud: .030

Front Shocks
Oil: 50
Piston: 60 ☒ Standard / ❑ Drilled
Spring: Trinity Purple
Limiters: ☒ Inside .080 ❑ Outside 0

NOTES: Mid roll center(used MF low roll center blocks and shimmed up .070), Full AE hex adapters

Droop settings are measured with Team Losi droop gauge.

## REAR SUSPENSION

☒ In
Toe ❑ Out 1.5

Ride Height 3.5mm


☒ -
Camber ❑ + 1

☒ No
Sway Bar ❑ Yes size _____

Droop Height: 5mm

Pivot Support: 0R

Arm Spacing
☒ FWD
❑ MDL
❑ BACK

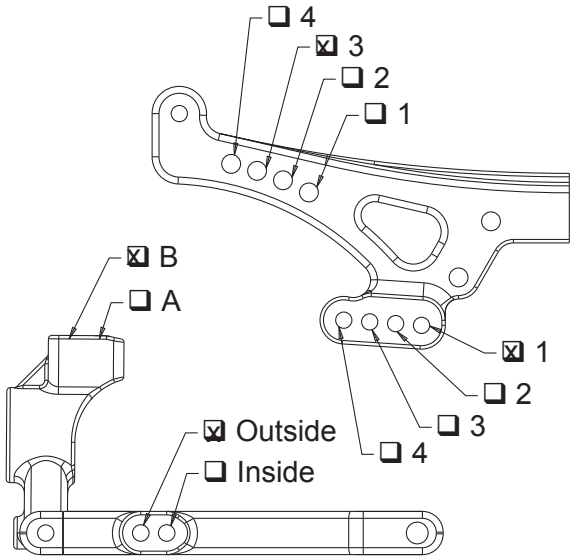


Rear Shocks
Oil: 60
Piston: 55 ❑ Standard / ☒ Drilled
Spring: Trinity Purple
Limiters: ☒ Inside .120 ❑ Outside 0

NOTES: low roll center, AE Hex adapters, new offset rear end

**Tires:**

| | Compound | Foam | Length |
|---|---|---|---|
| Front: TRC CYAN | | | 56.5mm |
| Rear: TRC Magenta | | | 56.5mm |

Battery Placement: ❑ Back ☒ Forward ❑ Other: _____

Transponder Position: Personal transponder mounted on top of servo

Notes: TQ Plus tire compound(red), Body mount position-Front-5(clip only) Rear-1(clip only)

Motor: 8x2 D5

Pinion: 26

Spur: 128

Tire Diameter: 56.5mm

Body: TL Alfa

Body Height: 4 3/8