SETUP SHEET

Driver: Todd Hodge

Date: 1 27-2002

Track: Trackside Wi

☒ Indoor ❑ Outdoor

☒ Tight / ❑ Open

☒ Carpet ❑ Concrete ❑ Asphalt

❑ Sealed ☒ Smooth ❑ Rough

FRONT SUSPENSION (Circle or Check the Appropriate Settings)

Droop Height: 3mm

Pivot Support: _____

❑ In
Toe ❑ Out 0

Ride Height 5.5mm

☒ -
Camber ❑ + 1

❑ Kickup 0

Caster ☒ Carrier 4


☒ No
Sway Bar ❑ Yes size_____

Arm Spacing
☒ FWD
❑ MDL
❑ BACK

Front Drive:
❑ Diff
☒ One-Way

Pulley

☒ Standard	42F	42R
❑ Overdrive	41F	42R
❑ Underdrive	42F	41R

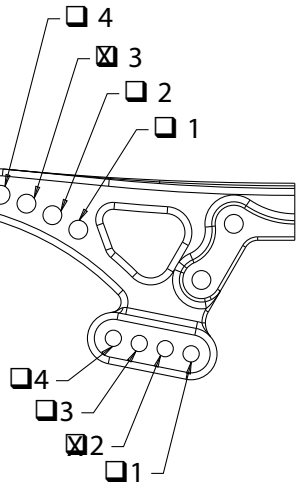

# of washers under steering/ tie-rod ball studs

Spindle ball stud: 3

Bellcrank ball stud: _____

Front Shocks
Oil: 80
Piston: 56 ❑ Standard / ☒ Drilled
Spring: Blue
Limiters: ❑ Inside _____ ❑ Outside .100

NOTES: High Roll Center

REAR SUSPENSION

☒ In
Toe ❑ Out 2.5

Ride Height 5.5mm


☒ -
Camber ❑ + 1

☒ No
Sway Bar ❑ Yes size_____

Droop Height: 5mm

Pivot Support: 2 R

Arm Spacing
☒ FWD
❑ MDL
❑ BACK

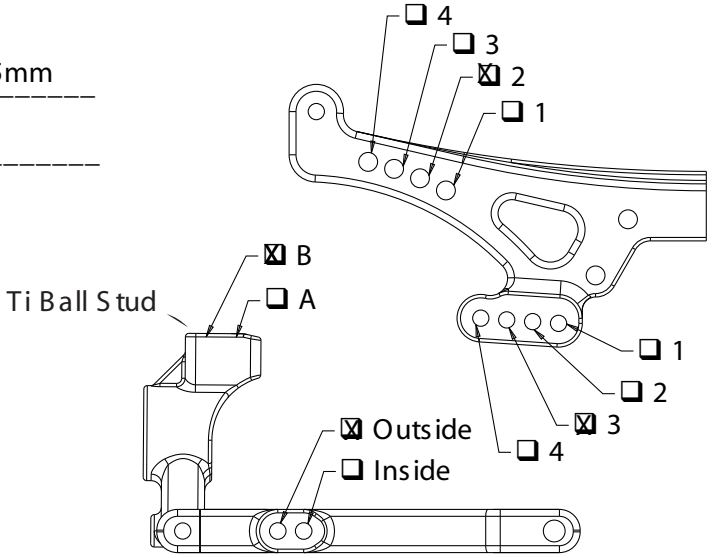

Rear Shocks
Oil: 80
Piston: 55 ❑ Standard / ☒ Drilled
Spring: Silver
Limiters: ❑ Inside _____ ❑ Outside .120

NOTES: Low Roll Center

Tires:

		Compound	Foam	Length
Front:	Sorex	24 or 28	038M	26mm Wheel
Rear:	Sorex	24 or 28	038M	26mm Wheel

Battery Placement: ❑ Back ☒ Forward ❑ Other: _____

Transponder Position: Behind Servo

Notes: _____

Motor: Trinity 10x2

Pinion: 25

Spur: 128

Tire Diameter: _____

Body: Protoform Stratus

Body Height: ROAR Legal