セッティング記録 / SETUP RECORD


Name: Michael Hanulec Date: May 12 2012 Air Temp: 55°F

Track: Jackson RC Country: USA Track Temp: °C

Track Condition: Night, Low/medium asphalt - pollen season


Qualify: Main: Finish: Fastest lap: 13.9

FRONT DRIVE ☑ Spool ☐ Gear Diff. ☐ Ball Diff. ☐ One-Way Note : Mira Outdrives

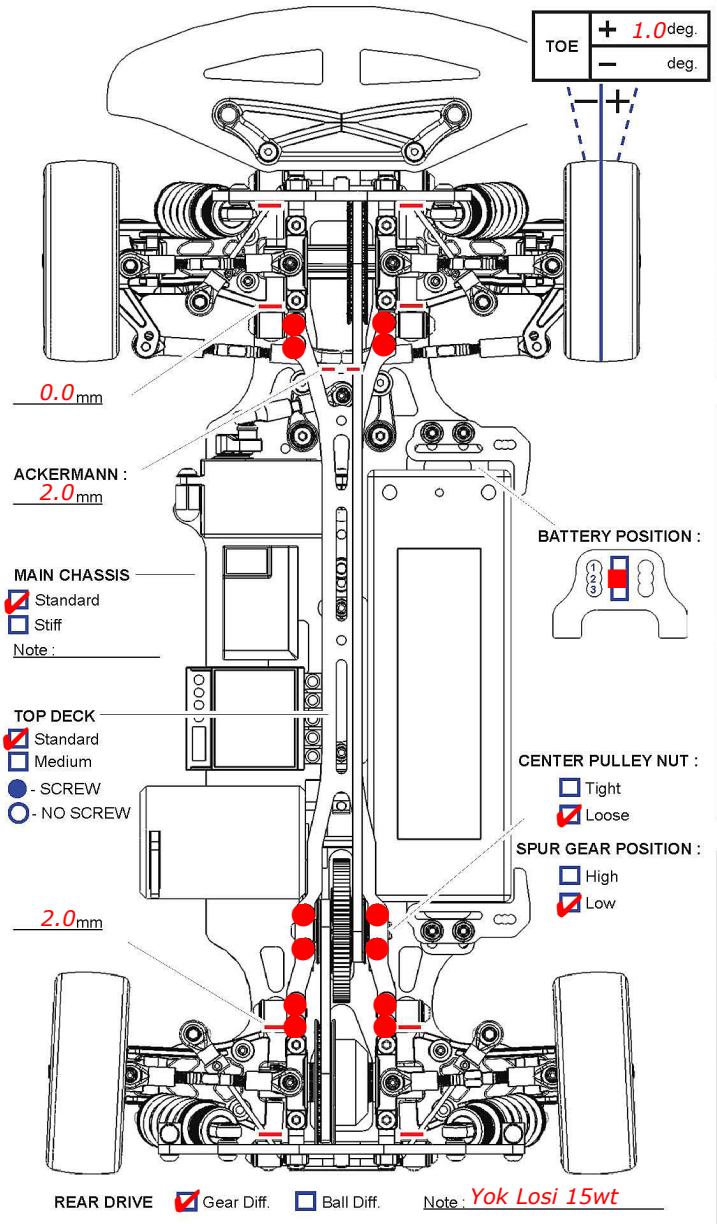


REAR DRIVE ☑ Gear Diff. ☐ Ball Diff. Note : Yok Losi 15wt

FRONT MEASUREMENTS




FRONT SHOCKS

☐ Standard ☑ Optional




RIDE HEIGHT	5.5mm	OIL WEIGHT	42.5 or 45 or 50wt
CAMBER ANGLE	1.75deg	BLADDER	Stock
DOG BONE	XRay ECS 50mm	SPRING	367
WHEEL HUBS	5.2mm	NOTE	Kyosho O-rings
WHEEL SPACER	0.0mm		

REAR MEASUREMENTS




REAR SHOCKS

☐ Standard ☑ Optional



RIDE HEIGHT	5.5mm	OIL WEIGHT	Same weight F&Rwt
CAMBER ANGLE	2.0deg	BLADDER	Stock
DOG BONE	TOP 43mm	SPRING	306
WHEEL HUBS	5.2mm	NOTE	Kyosho O-rings
WHEEL SPACER	0.0mm		


			FRONT	REAR
MOTOR	Thunder Power 17.5T			
SPUR GEAR	66T	BRAND	Team Powers	
PINION GEAR	_BIG_	COMPOUND	36 Premount	
BATTERY	OHP 6000 60c	INSERT	Premount	
BODY SHELLS	LTC-R LTWT	WHEEL	Premount	
WING	LTC-R LTWT	TIRE TREATMENT	Tweak to clean	
ESC SETTING	Tekin RS v223			



FRONT

AXLE LENGHT: mm

CASTER BLOCK: 4°




CAMBER PLATE
☑ Standard
☐ Optional
1 ☑ 2.5mm
2 ☐

PLASTIC ARM MOUNT
☐ Low ☑ Medium ☐ High

PLASTIC ARM MOUNT INSERT
☐ Low ☑ Medium ☐ High

STEERING BLOCK
☐ Original
☑ Alloy

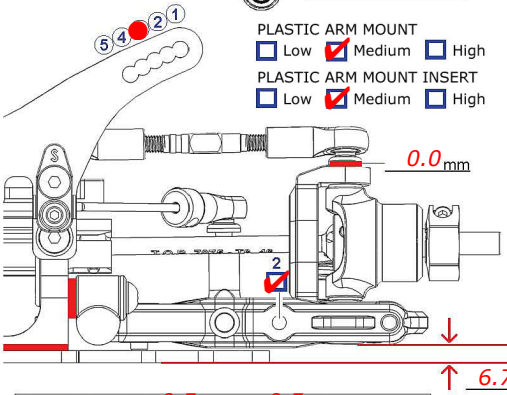


Roll Ctr. Shim : FF 0.5mm / FR 0.5mm

Toe-Out : (FF 1mm - FR 1mm) / 0.8 = 0.00deg

REAR


AXLE LENGHT: mm



CAMBER PLATE
☐ Standard
☑ Optional
1 ☐ 2.0mm
2 ☐

PLASTIC ARM MOUNT
☐ Low ☑ Medium ☐ High

PLASTIC ARM MOUNT INSERT
☐ Low ☑ Medium ☐ High

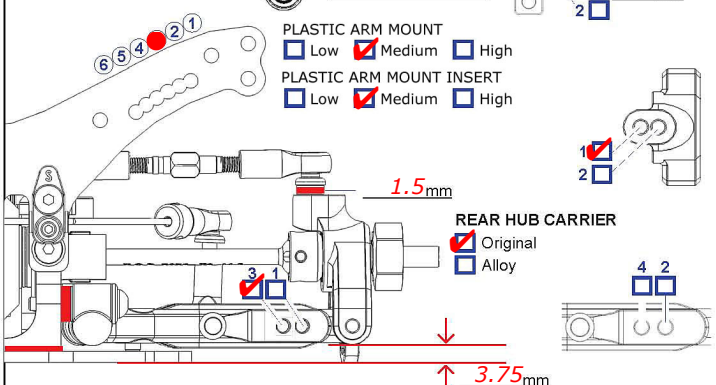

REAR HUB CARRIER
☑ Original
☐ Alloy

Roll Ctr. Shim : RR 0.5mm / RF 0.5mm

Toe-In : (RR 1mm - RF 3mm) / 0.8 = 0.00deg

Editable by Arn0 at PetitRC.com

SPR Mira Outdrives, XRay 50mm ECS, XRay 4 degree C-hubs; SPR Seis Fans x2; Photon option camber plates drilled out to 3mm; 10g behind servo, 20g behind motor