セッティング記録 / SETUP RECORD

PHOTON EX


Name: Hanulec Date: Dec 2 2012 Air Temp: 55 °F

Track: Horsham RC Country: USA Track Condition: Medium bite carpet

Track Temp: °C

Qualify: Main: Finish: Fastest lap:

FRONT DRIVE ☑ Spool ☐ Gear Diff. ☐ Ball Diff. ☐ One-Way Note : SPR Mira Outdirves

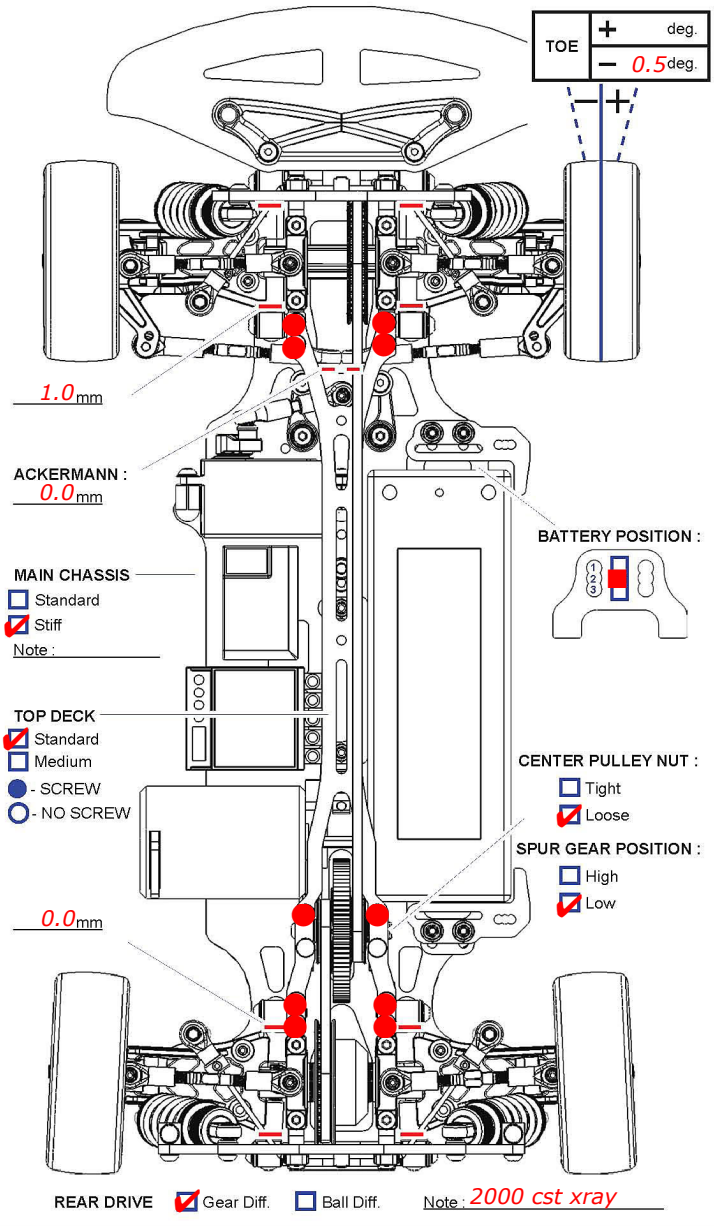

REAR DRIVE ☑ Gear Diff. ☐ Ball Diff. Note : 2000 cst xray

FRONT MEASUREMENTS	FRONT SHOCKS
Front of Car; + step; - step; TENSION	☐ Standard ☑ Optional; 1.0mm hole; 1.2mm hole

RIDE HEIGHT	5.25mm	OIL WEIGHT	LOSI 60wt
CAMBER ANGLE	1.75deg	BLADDER	Stock
DOG BONE	XRay ECS 50mmmm	SPRING	367
WHEEL HUBS	Stockmm	NOTE	no hole in shock top, Kyo oring
WHEEL SPACER	NAmm		

REAR MEASUREMENTS	REAR SHOCKS
Front of Car; - step; + step; TENSION	☐ Standard ☐ Optional; 1.0mm hole; 1.2mm hole

RIDE HEIGHT	5.5mm	OIL WEIGHT	LOSI 60wt
CAMBER ANGLE	2.25deg	BLADDER	Stock
DOG BONE	TOP 44.5mm	SPRING	306
WHEEL HUBS	Stockmm	NOTE	no hole in shock top, Kyo oring
WHEEL SPACER	NAmm		

			FRONT	REAR
MOTOR	EA Motorsports D3.5			
SPUR GEAR	67	BRAND	Solaris	
PINION GEAR	BIG	COMPOUND	Hard	
BATTERY	EA Motorsports 70C	INSERT	Premount	
BODY SHELLS	LTC-R LTWT	WHEEL		
WING	LTC-R LTWT	TIRE TREATMENT		

ESC SETTING

blinky mode

FL FR RL RR

FRONT

AXLE LENGHT: 50 mm

CASTER BLOCK: °

NAmm


ROLL BAR NAmm

CAMBER PLATE
☑ Standard
☐ Optional
1 ☑ 1.0mm
2 ☐

PLASTIC ARM MOUNT
☐ Low ☑ Medium ☐ High

PLASTIC ARM MOUNT INSERT
☐ Low ☑ Medium ☐ High

STEERING BLOCK
☐ Original
☑ Alloy

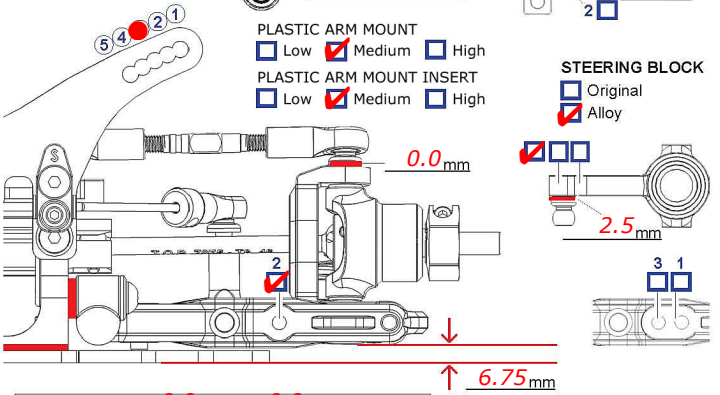

Roll Ctr. Shim : FF 0.0mm / FR 0.0mm
Toe-Out : (FF 0.5mm - FR 0.5mm) / 0.8 = 0.00deg

REAR

AXLE LENGHT: 44.5mm


NAmm

ROLL BAR NAmm

CAMBER PLATE
☑ Standard
☐ Optional
1 ☑ 1.0mm
2 ☐

PLASTIC ARM MOUNT
☐ Low ☑ Medium ☐ High

PLASTIC ARM MOUNT INSERT
☐ Low ☑ Medium ☐ High

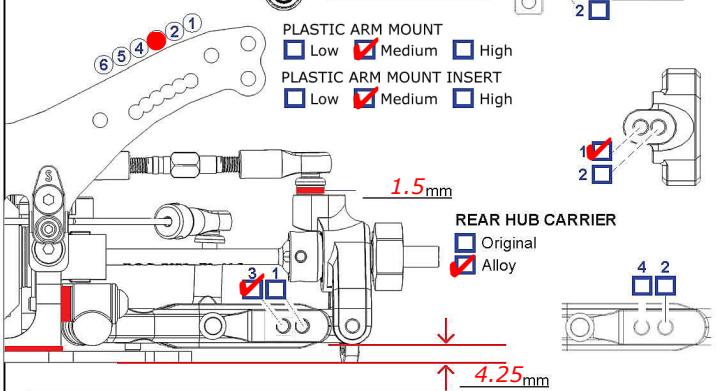

REAR HUB CARRIER
☐ Original
☑ Alloy

Roll Ctr. Shim : RR 0.0mm / RF 0.0mm
Toe-In : (RR 0.5mm - RF 2.5mm) / 0.8 = 0.00deg

Editable by Arn0 at PetitRC.com

Short rear wheel base can make the car loose on power. Lengthen the rear if needed. 1mm shim on top of bell crank connector. 4mm shim on servo saver to make link straight.

TOP RACING