セッティング記録 / SETUP RECORD

PHOTON EX

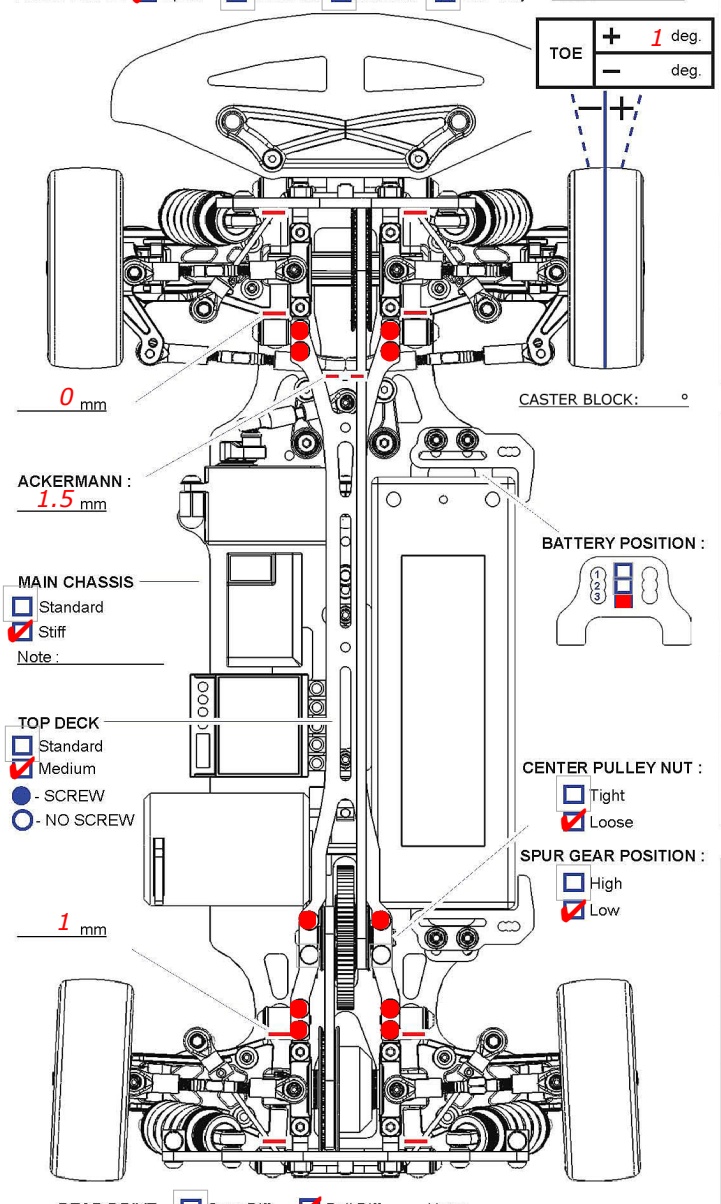
Name: Larry Fairtrace Date: 8/26/12 Air Temp: 70 F

Track: Middle River MD Country: USA Track Temp: 70 F



Track Condition: Med High Traction CRC Fast Track Carpet



Qualify: _____ Main: _____ Finish: _____ Fastest lap: _____


FRONT DRIVE ☑ Spool ☐ Gear Diff. ☐ Ball Diff. ☐ One-Way Note : _____



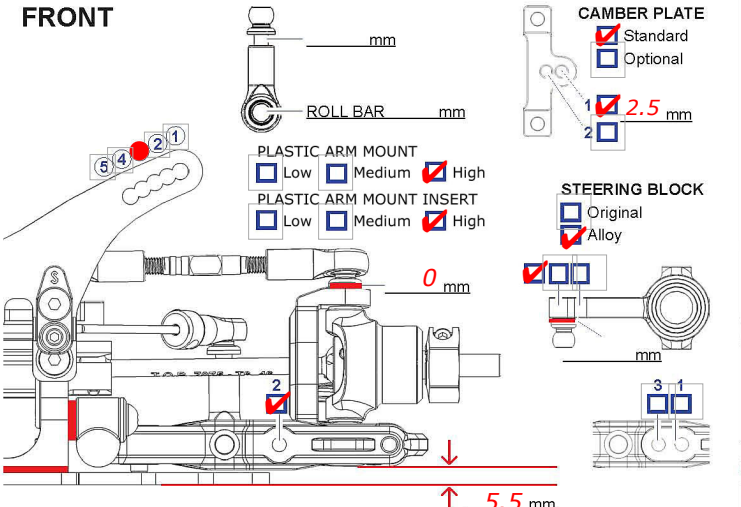
REAR DRIVE ☐ Gear Diff. ☑ Ball Diff. Note : _____

FRONT MEASUREMENTS		FRONT SHOCKS	
		☐ Standard ☑ Optional 	
RIDE HEIGHT	5.1 mm	OIL WEIGHT	45 wt
CAMBER ANGLE	-2 deg	BLADDER	
DOG BONE	Xray 50mm ECS mm	SPRING	344
WHEEL HUBS	5.2 mm	NOTE	Fresh shocks give about 5mm of rebound
WHEEL SPACER	0 mm		

REAR MEASUREMENTS		REAR SHOCKS	
		☐ Standard ☑ Optional 	
RIDE HEIGHT	5.25 mm	OIL WEIGHT	42.5 wt
CAMBER ANGLE	-2.5 deg	BLADDER	standard
DOG BONE	44.5 alum mm	SPRING	289
WHEEL HUBS	5.2 mm	NOTE	
WHEEL SPACER	0 mm		

			FRONT	REAR
MOTOR	13.5 Thunder Power			
SPUR GEAR	69 48 Pitch	BRAND	Jaco	
PINION GEAR		COMPOUND	Blue	
BATTERY	Thunder Power	INSERT		
BODY SHELLS	LtcR LW	WHEEL		
WING		TIRE TREATMENT	SXT 3.0	
ESC SETTING				

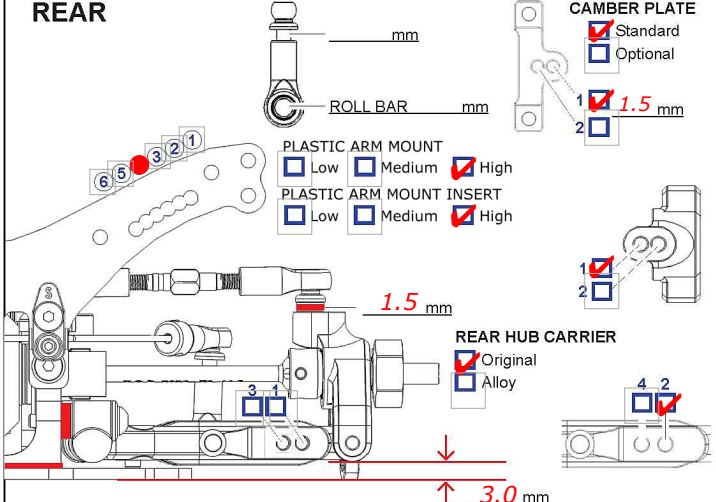
FRONT



Roll Ctr. Shim : FF .5 mm / FR .5 mm

Toe-Out : (FF .5 mm - FR .5 mm) / 0.8 = 0 deg

REAR



Roll Ctr. Shim : RR .5 mm / RF .5 mm

Toe-In : (RR 2 mm - RF 0 mm) / 0.8 = -2 deg

Editable by Arn0 at PetitRC.com

I have a 2.5mm shim under the steering posts.

TOP RACING