
VEGA ELITE RB5 SP2 Setup Sheet

KYOSHO — TEAM XTREME

Name	Date	Track / City	Event
Kevin Lee	09-10.04.2010	Stotfold	BRCA National

Front Suspension



Upper Spacer: 2 mm


Shock Stay
- ☐ Std (UM511)
- ☐ Carbon (UMW500)
- ☐ Big Bores (UMW525)

Toe ☐ In ☐ Out ____°

Front Bulkhead Weight Placement
- ☐ None
- ☐ Bulkhead ____ oz ____ g
- ☐ Chassis ____ oz ____ g


* 1oz=28g

Camber ☐+ ☐− ____°

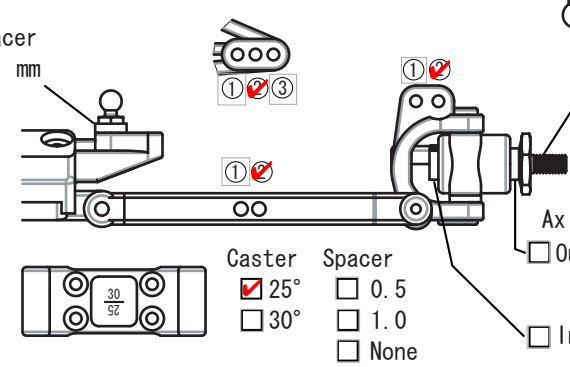

Caster
- ☑ 25°
- ☐ 30°

Spacer
- ☐ 0.5
- ☐ 1.0
- ☐ None




Ackerman Steering Spacer ____ mm

Axle Type
- ☐ Standard (Steel: UM506)
- ☐ Option (Aluminum: UMW507)

Axle Spacer
- ☐ Out (Standard) ____ mm
- ☐ In ____ mm

Bump Steer Spacer ____ mm


Axle Height Spacer
- ☐ Up
- ☐ Down



Wheelbase
- ☐ Long
- ☐ Middle
- ☐ Short

Comments: Wide track, Vega steering link - to decrease ackerman and increase overall lock

Rear Suspension

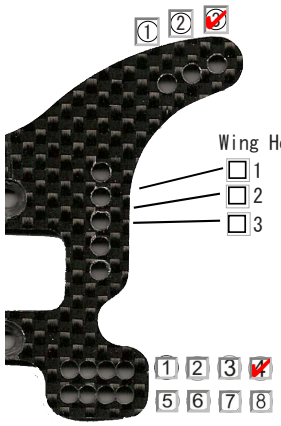

Wing Height
- ☐ 1
- ☐ 2
- ☐ 3

Lower Sus Holder


	Normal	Aluminum (Opt)
Narrow ☐ / Wide ☐	RF: RB5 ☐ / RF2: RB5SP ☐	UMW511+UMW512 ☐ / UMW514+UMW515 ☐

Sus Holder Spacer


F	☐ 0.5 ☐ 1.0 ☐ None	R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat ____°

Swing Shaft
- ☐ 62.5mm: RB5 (UM510, UM510-01)
- ☐ 65.5mm: RB5SP (UM522, LA232-01)



Upper Spacer ____ mm




Wheelbase
- ☑ Long
- ☐ Middle
- ☐ Short

Rear Hub add Toe
- ☐ 0° (Standard)
- ☐ 0.5° (LA244-05)

Sway Bar ☐ None ☑ 0.9 mm

Camber ☐+ ☐− ____°

Axle Spacer
- ☐ Out ____ mm
- ☐ In ____ mm



Wheel Spacer ____ mm


Wheel Shaft Type
- ☐ RB5SP (UM522-02)
- ☐ RB5 (UM510-02)
- ☐ Proline Axle (UM502)
- ☐ UM523 (Brushless Motor Offset Spacer)

Lower Arm
- ☐ UM503 (kit) ☐ UM521 (RB5SP)
- ☐ LA243 (Mid) ☐ UM521-1 (RB5SP)
- ☐ Type-B (UM519) ☐ UMW516-05
- ☐ UM519-2 ☐ UMW516-1
- ☐ UMW516-0

Comments: Wheelbase short inner, New Inside hole on wishbone (drilled one hole in from original position) for shocks, 1deg hub

Shock

	Front	Rear
Shock Piston	3-A	3-A
Shock Oil	# 45wt	# 25wt
Shock Spring	#75 Light Green	#72 Cobalt
Limiters	in ____ mm / out ____ mm	in ____ mm / out ____ mm
Shock Length (A)	____ mm	____ mm
Shaft Length (B)	____ mm	____ mm
Shock Top Type	☐ Std: RB5 ☐ Low: ZX5FS	☐ Std: RB5 ☐ Low: ZX5FS



Rear Shock Body
- ☐ Short: RB5SP (W5196-01V) 38mm
- ☐ STD: RB5 (W5187-01V) 42mm

Rear Shock Shaft
- ☐ STD: RB5SP (W5193-01) 50mm
- ☐ Opt: ZX5 (W5183-02) 54mm

Track Condition

- ☐ Smooth
- ☐ Bumpy
- ☐ Low Traction
- ☐ Med Traction
- ☐ High Traction
- ☐ Wet
- ☐ Dry
- ☐ Sandy
- ☐ Soft Dirt
- ☐ Grass
- ☐ Blue Groove
- ☐ Clay
- ☐ Dusty
- ☐ Other

Spring / Rate

#55	Orange
#60	Orange Yellow
#65	Yellow
#68	Blue
#70	Silver
#72	Cobalt blue
#75	Light Green
#80	Green

Body / Wing / Chassis

Wing
- ☐ Aquarius (LA239)
- ☐ Sagittarius (LA240)
- ☐ Aries (LA241)
- ☐ Blast-L (LA251)
- ☐ Step-L (LA247)
- ☐ Step-S (LA247)
- ☐ Blast-S (LA247)
- ☑ Other: Vega HD

Wing Angle
4° ☐ 7° ☐ 10° ☐

Weight Placement
- ☐ On Top of Servo ____
- ☑ Under Servo 2x45grs
- ☐ Under Speed Controller ____
- ☐ Under Lipo ____





Ride Height ☐ A ☐ B F ____ mm R ____ mm

Tyre

	Front	Rear
Tyre	Mini Spikes	Mini Spikes
Inserts	Answer RC firm	Answer RC medium
Wheel		
Tyre Compund	Yellow / Yellow	

Others

Gear Ratio 2.6:1

Motor	Tekin Redline 6.5
Pinion / Spur	24 / ____
Battery	Orca 5200 45C Saddle
ESC	Tekin RS pro

Comment : Losi Oil, Rudebits weights, Kit spur

Servo: Spektrum S6070, Receiver: Spektrum SR3520

Ver: njc-03