
AWESOMATIX A800RR

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.


NAME Jeff Rowland
RACE Halloween Pumpking
TRACK First State Hobbies
COUNTRY United States CLASS 21.5T

DATE 25.10.2026 TEMP. °C AIR / TRACK 75F / 75F
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☑ FAST ☑
TRACK TRACTION LOW ☑ MEDIUM ☑ HIGH ☐

FRONT

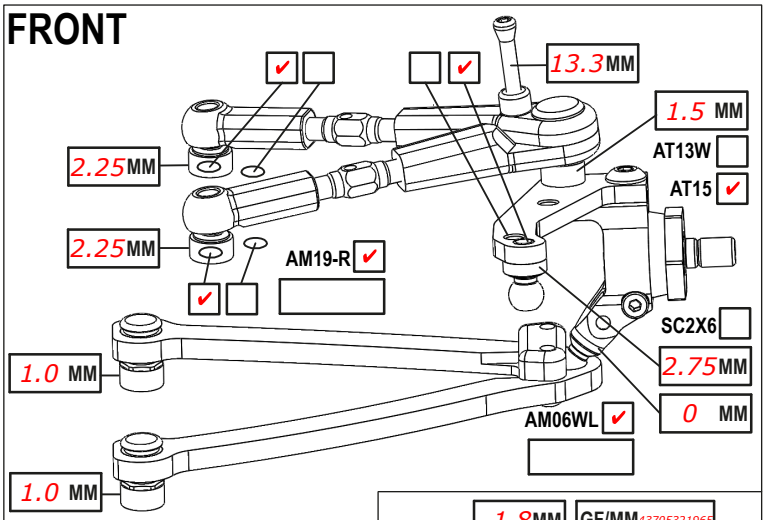

CAMBER ANGLE /°	2.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	5.8
UPSTOP / MM	20.6
ANTI-ROLL BAR Ø / MM	1.2
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☐	AM14H
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POS. DOWN ☑ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

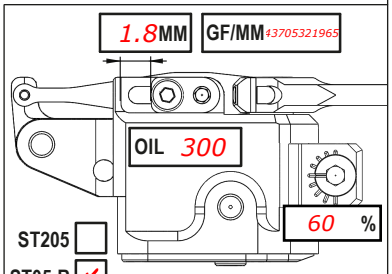


ST205 ☐
ST05-R ☑


SHOCKS SETUP

DAMPER	D4 ☑		
ROTOR	2 HOLES ☑		
SPRING	STD ☐	S	☑
SRS/RHS ARR.	I ☑	II	☐
PSS SETUP	30% ☐	25% ☐	15% ☐
DAMPING LINEAR	☐ P1	☐ P2	☑
DAMPER SPACER / MM	0.5mm		
C45	YES ☐	NO	☑

REAR

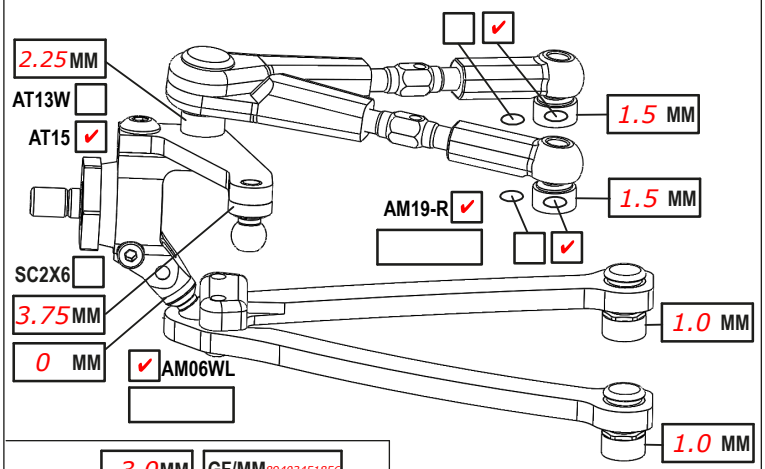

CAMBER ANGLE /°	2.0
CASTER ANGLE /°	2.0
TOE ANGLE /°	2.0
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	5.2
UPSTOP / MM	20.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☑	GD2B-R
DRIVE POS. DOWN ☑ UP ☐ +1 ☐	
DIFF OIL 10k	DIFF SHIMS SH5x7x0.4

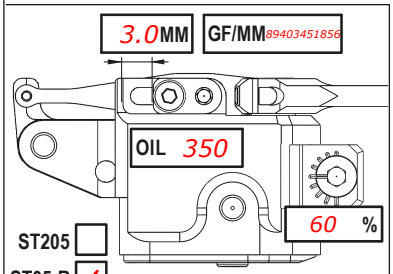


ST205 ☐
ST05-R ☑

SHOCKS SETUP

DAMPER	D4 ☑		
ROTOR	2 HOLES ☑		
SPRING	STD ☐	S	☑
SRS/RHS ARR.	I ☑	II	☐
PSS SETUP	30% ☐	25% ☐	15% ☐
DAMPING LINEAR	☐ P1	☐ P2	☑
DAMPER SPACER / MM	0.5mm		
C45	YES ☑	NO	☐

CHASSIS FLEX AND WEIGHT SETTINGS

BW22-R ☑ ABH ☐ BW52-R ☐

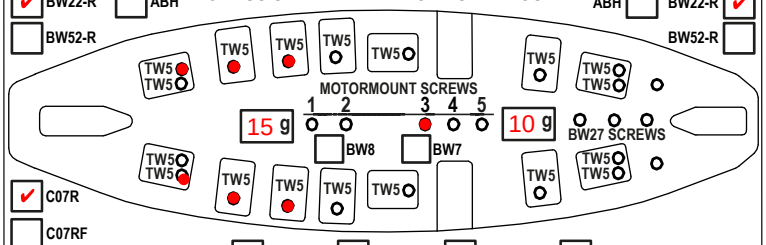


ABH ☐ BW22-R ☑ BW52-R ☐

C07R ☑
C07RF ☐

LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER


BUMPER TOP PLATE CUT ☐ FRONT BUMPER P15L ☐ OTHER MXLR (M-Flex)

C26 ☐ C26 ☐




FRONT TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
REAR TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☑ OTHER

BODY POSITION




BOTTOM WINDW LINE TO BODY POST DISTANCE

FRONT BODY POSTS
ORING YES ☑ NO ☐
HOLE # 3(2 orings)

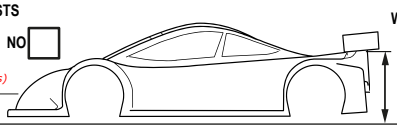

WINGLETS YES ☑ NO ☐
REAR HRB SETTING / MM 0
SURFACE TO WING MOUNT DISTANCE / MM 89.5

TIRES	Gravity Gold
INSERTS	Gravity Gold
SIDEWALLS GLUE Ø / MM	F 0 R 0
ADDITIVE	SXT 3.0
TOTAL WEIGHT	1302
NOTES:	Clean with motor spray



TIME MIN. F 6 R 6
WEIGHT DISTRIBUTION % F 50.4 R 49.6

MOTOR LATERAL SHIFT / MM	0	SERVO	Sanwa PGS-LH II
MOTOR	Hobbywing V10 G5 21.5	SERVO HORN / HEIGHT	Xray Hard Saver/17mm
SPUR 89 PINION 47 RATIO 2340425532		ACKERMANN POSITION	Back
BODY	ZooRacing Wolverine MAX 0.4	STEER. TRAVEL IN 24 OUT	
WING	Xtreme Twister 0.4	BATTERY	TeamEAM 5400 UULCG
ESC	Hobbywing XR10 Pro G3X	RECEIVER	Sanwa RX-492
ESC SETTINGS	Blinky	RADIO	Sanwa M17
BEST LAPTIME	8.554	QUALIF./FINAL POSITION	1 / 1

COMMENTS:

MR33 oils, FSS; RCMaker rear body holders; 1up Ti turnbuckle and screw kit; 21g in front of servo; 20g under receiver; 17g between motor and esc