FACTORY X-60

www.xfactoryrc.com



Driver: Paul Sinclair Date: 08-22-10

Track/Event: 2010 ROAR Nats Final Set-Up

Front Suspension

Ride Height: Arms Level

Camber: -3.0 ° Toe: In 1 °

Ackerman: ▣Forward □Back


Servo: ▣ Fwd □ Back

Axles: ▣ Trailing □ Inline


Caster Block:
□20° □25° ▣30°



Washers: 1

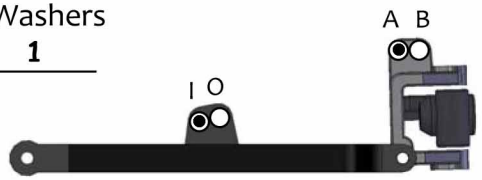

Axle Height:
□ High
▣ Med
□ Low



Washers: 2

Position:
▣Fwd □Back

Front Shocks

	Spring	Piston	Oil
AE	Blue	#2	35
Losi	Red	56	35
Kyosho			

Shock Length: 3.32"

Compressed Length: _____


Rear Suspension

Ride Height: Chassis Level

Camber: -1.5 °


Transmission Height: .060"


Sway Bar: no



Washers: -.060"


○E-Speed High
○E-Speed Low

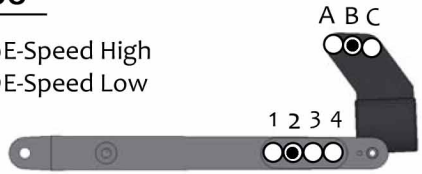



Anti-Squat: .090"

Arm Position:
□Back □Mid ▣Fwd



Hub Position:
□Back □Mid ▣Fwd


Rear Shocks

	Spring	Piston	Oil
AE	Silver	#3	27.5
Losi	Pink	57	27.5
Kyosho			

Shock Length: 3.94"

Compressed Length: _____

Weight

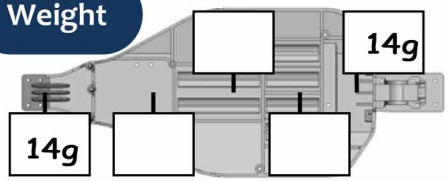

Total Weight: 1890g

F/R Bias: ____ / ____

Notes/Rants/Excuses

0° Rear hubs, no washers

If the front feels grabby try a stiffer front spring

Front shocks should have A LOT of limiting inside to get the correct droop

Battery: SMC C-Max 5200 Motor: SP V3 7.5 Gearing: 18 / 81