AWESOMATIX A12X

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

SETUP SHEET
210426

NAME Al Sodano
RACE 2026 MonTech NYGP
TRACK 360v2
COUNTRY United States CLASS 21.5T GT-12

DATE 18.10.2026 TEMPERATURE AIR / TRACK °C / °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☑ TECHNICAL ☐ MIXED ☑ FAST ☐
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER ____ °

SUSPENSION PLATE
C1205-X ☐ C1205AFS ☐
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☑
C1205-6.0 ☐ OTHER ____


SERVO PLATE
C1201-X ☐ C1201AFS ☐
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☑
OTHER ____

STEERING BLOCKS
AT1204-X ☐ OTHER ____
AT1204-ZTX ☑
BUMPSTEER SHIMS 1.5 mm

FRONT BUMPER
P1215 ☐
OTHER Fab Tek
SPACER ____ mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☐
SPR12XR-C1.2 ☐ OTHER Na

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT ____ mm
REAR ____ mm

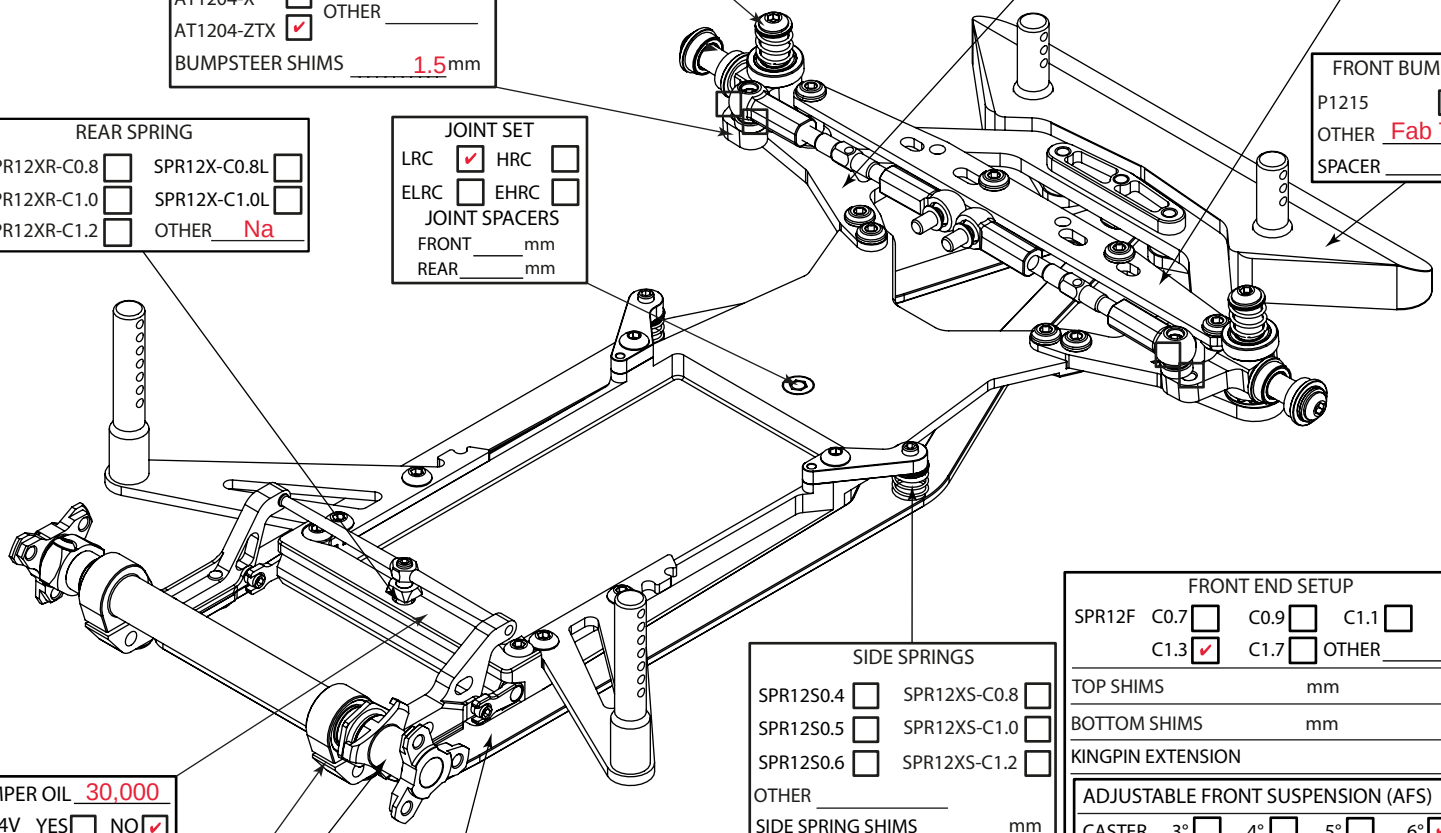

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☐ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER ____
SIDE SPRING SHIMS ____ mm
SIDE SPRING GAP ____ mm

FRONT END SETUP
SPR12F C0.7 ☐ C0.9 ☐ C1.1 ☐ C1.3 ☑ C1.7 ☐ OTHER ____

TOP SHIMS	mm	pcs
BOTTOM SHIMS	mm	pcs
KINGPIN EXTENSION	mm	

ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.0 ° DROOP .5 mm
SPRING PRELOAD 0 mm

O-RINGS 0pcs ☑ 1pcs ☐ 2pcs ☐
O-RING TYPE
GREASE Mxlr 15k

DAMPER OIL 30,000
OR14V YES ☐ NO ☑

RIDE HEIGHT SPACERS 2.0 mm

REAR AXLE
SSS SPOOL ☐ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☑ BRAND ____
STEEL ☐ OIL ____

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☐
AM1204WC ☑
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.5 mm	FRONT DROOP (FD)	.5 mm
REAR RIDE HEIGH (RRH)	3.7 mm	REAR DOWNSTOP (RD)	2 mm
GAP UNDER DAMPER (GUD)	mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1 mm	FRONT	.5 inside mm
SPRING ROD HEIGHT (SRH)	mm	REAR	172 mm

BATTERY		
BATTERY PLUGS	FRONT ☑	BACK ☐
SERVO POSITION	LEFT ☐	RIGHT ☑
ESC POSITION	LEFT ☑	RIGHT ☐

SERVO	Sanwa
SERVO SAVER	Hudy
SHIMS ON SERVO SAVER	mm
TOE OUT	1.0 °
STEER. TRAVEL	IN 27 ° OUT °

TIRES	FRONT	REAR
BRAND	Gravity	Gravity
TYPE	Rubber	Rubber
DIAMETER	mm	45 mm
GLUED SIDEWALLS	FRONT ☐	REAR ☐

ADDITIVE ____
FRONT ____ mm REAR
TIME 5 min TIME 5 min

MOTOR	)bbywing 21.5 (	TOTAL WEIGHT	753
SPUR 1 PINION 1 ROLLOUT 0		F/R WEIGHT DISTRIBUTION	
ESC	)by wing Just st	RECEIVER	Sanwa
ESC SETTINGS		RADIO	Sanwa
BODY	Zoo Zerda	REAR BODY HEIGHT (SIDE DAMS)	mm
BEST LAPTIME		QUALIF / FINAL POSITION	1 / 1

COMMENTS:
Side springs in rear Awesomatix gold .6
Small esc and TQ 16 Gauge wire to offset heavy tires
Fabtek front bumper and fan mount
.5 rear up travel
Shims under fr plate to get ride height
Sagami offset servo arm