AWESOMATIX A12X

SETUP SHEET

210426

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Jeff Dayger
RACE NYGP
TRACK 360v2
COUNTRY USA CLASS 13.5 1/12

DATE 10-16-26 TEMPERATURE AIR / TRACK °C / °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☐ TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☐ HIGH ☑

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER AFS,1.25 °

SUSPENSION PLATE
C1205-X ☑ C1205AFS ☐
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER ____


SERVO PLATE
C1201-X ☑ C1201AFS ☐
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER ____

STEERING BLOCKS
AT1204-X ☐ OTHER ____
AT1204-ZTX ☐
BUMPSTEER SHIMS ____ mm

FRONT BUMPER
P1215 ☐
OTHER FAB
SPACER 0 mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☐
SPR12XR-C1.2 ☐ OTHER NONE

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT ____ mm
REAR ____ mm

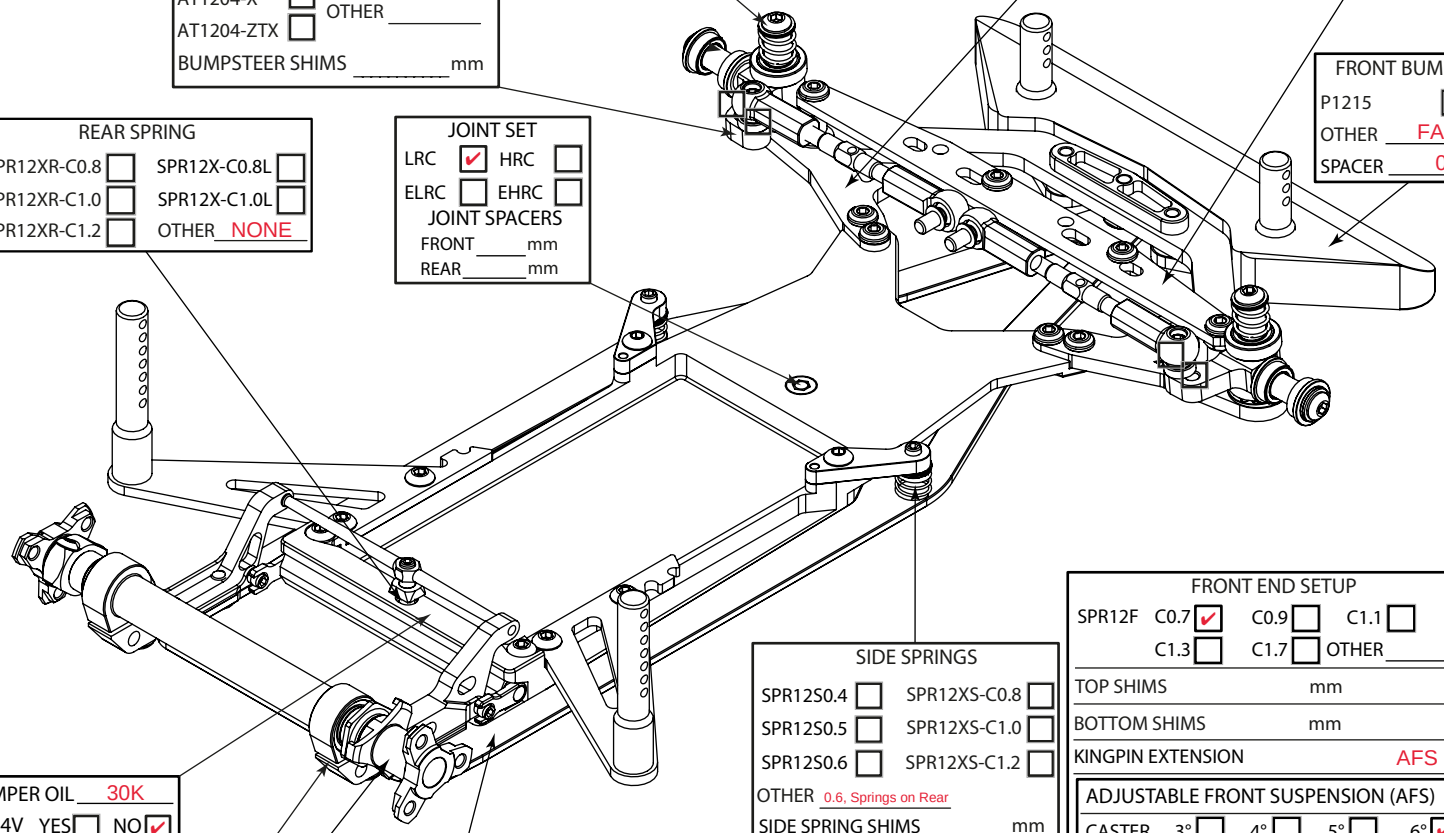

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☐ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER 0.6, Springs on Rear
SIDE SPRING SHIMS ____ mm
SIDE SPRING GAP ____ mm

FRONT END SETUP
SPR12F C0.7 ☑ C0.9 ☐ C1.1 ☐
C1.3 ☐ C1.7 ☐ OTHER ____
TOP SHIMS mm pcs
BOTTOM SHIMS mm pcs
KINGPIN EXTENSION AFS mm
ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.25 ° DROOP 1 mm
SPRING PRELOAD mm
O-RINGS 0pcs ☐ 1pcs ☐ 2pcs ☐
O-RING TYPE
GREASE Kyosho 15K

DAMPER OIL 30K
OR14V YES ☐ NO ☑

RIDE HEIGHT SPACERS 0 mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND ____
STEEL ☐ OIL ____

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☐
AM1204WC ☑
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.5 mm	FRONT DROOP (FD)	1 mm
REAR RIDE HEIGH (RRH)	3.5 mm	REAR DOWNSTOP (RD)	2,00 mm
GAP UNDER DAMPER (GUD)	3.7 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1.0 mm	FRONT	168 mm
SPRING ROD HEIGHT (SRH)	mm	REAR	169 mm

BATTERY	SMC 9200	SERVO
BATTERY PLUGS	FRONT ☑ BACK ☐	SERVO SAVER
SERVO POSITION	LEFT ☐ RIGHT ☐	SHIMS ON SERVO SAVER mm
ESC POSITION	LEFT ☑ RIGHT ☐	TOE OUT °
		STEER. TRAVEL IN ° OUT °

TIRES	FRONT	REAR
BRAND	Jaco	Jaco
TYPE	Blue	Green
DIAMETER	39.1 mm	40.2 mm
GLUED SIDEWALLS	FRONT ☑	REAR ☑

ADDITIVE ____
FRONT ____ mm REAR
TIME 10 min TIME 10 min

MOTOR	JDR 13.5	TOTAL WEIGHT	731
SPUR 69 PINION 46 ROLLOUT 84,19		F/R WEIGHT DISTRIBUTION	
ESC	HOBBYWING 1S	RECEIVER	Sanwa
ESC SETTINGS		RADIO	Sanwa
BODY	M20	REAR BODY HEIGHT (SIDE DAMS)	mm
BEST LAPTIME	9.2	QUALIF / FINAL POSITION	3 / 3

COMMENTS: