AWESOMATIX A12X

SETUP SHEET 210426

This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Jeff Dayger
RACE NYGP
TRACK 360v2
COUNTRY USA CLASS 17.5 1/12

DATE 10-16-26 TEMPERATURE AIR / TRACK °C / °C
SURFACE ASPHALT ☐ OUTDOOR ☐ INDOOR ☑ CARPET ☑
TRACK CONDITIONS BUMPY ☐ FLAT ☐ TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☐ HIGH ☑

STEERING HUB POST
ST1208-C4S ☐ ST1208-C5AL ☐
ST1208-C5S ☐ ST1208-C5AL ☐
ST1208-C6S ☐ ST1208-C6AL ☐
CAMBER AFS,1.25 °

SUSPENSION PLATE
C1205-X ☑ C1205AFS ☐
C1205-ZT ☐ C1205AFS-1.5 ☐
C1205-X-1.5 ☐ C1205AFS-5.0 ☐
C1205-6.0 ☐ OTHER ____


SERVO PLATE
C1201-X ☑ C1201AFS ☐
C1201-ZT ☐ C1201AFS-1.5 ☐
C1201 ☐ C1201AFS-5.0 ☐
OTHER ____

STEERING BLOCKS
AT1204-X ☐ OTHER ____
AT1204-ZTX ☐
BUMPSTEER SHIMS ____ mm

FRONT BUMPER
P1215 ☐
OTHER FAB
SPACER 0 mm

REAR SPRING
SPR12XR-C0.8 ☐ SPR12X-C0.8L ☐
SPR12XR-C1.0 ☐ SPR12X-C1.0L ☐
SPR12XR-C1.2 ☐ OTHER NONE

JOINT SET
LRC ☑ HRC ☐
ELRC ☐ EHRC ☐
JOINT SPACERS
FRONT ____ mm
REAR ____ mm

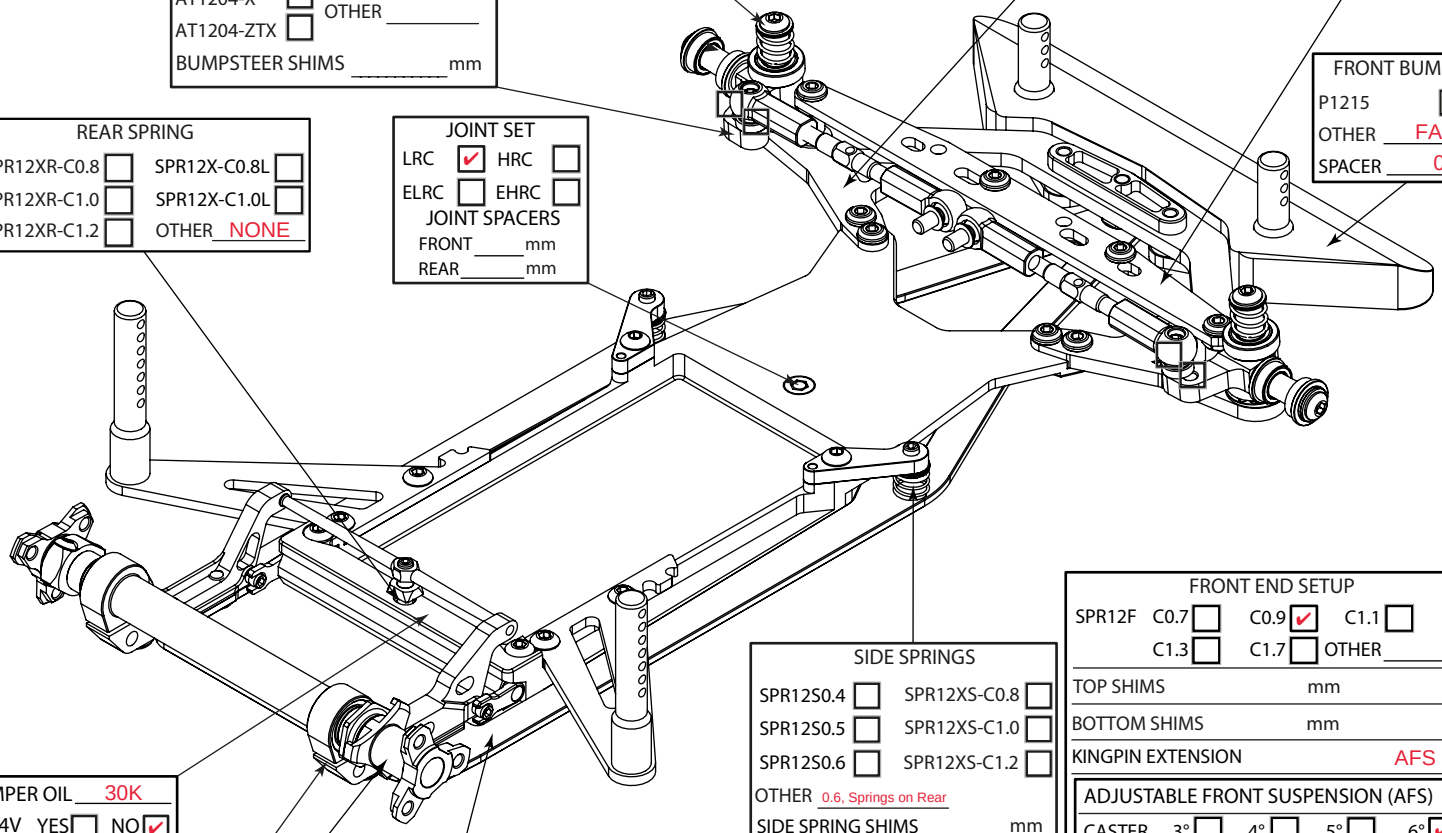

SIDE SPRINGS
SPR12S0.4 ☐ SPR12XS-C0.8 ☐
SPR12S0.5 ☐ SPR12XS-C1.0 ☐
SPR12S0.6 ☐ SPR12XS-C1.2 ☐
OTHER 0.6, Springs on Rear
SIDE SPRING SHIMS ____ mm
SIDE SPRING GAP ____ mm

FRONT END SETUP
SPR12F C0.7 ☐ C0.9 ☑ C1.1 ☐ C1.3 ☐ C1.7 ☐ OTHER ____
TOP SHIMS mm pcs
BOTTOM SHIMS mm pcs
KINGPIN EXTENSION AFS mm
ADJUSTABLE FRONT SUSPENSION (AFS) ☑
CASTER 3° ☐ 4° ☐ 5° ☐ 6° ☑
CAMBER 1.25 ° DROOP 1 mm
SPRING PRELOAD mm
O-RINGS 0pcs ☐ 1pcs ☐ 2pcs ☐
O-RING TYPE
GREASE Kyosho 15K

DAMPER OIL 30K
OR14V YES ☐ NO ☑

RIDE HEIGHT SPACERS 0 mm

REAR AXLE
SSS SPOOL ☑ BALL DIFF ☐
CS-1 SPOOL ☐ GEAR DIFF ☐
CARBON ☐ BRAND ____
STEEL ☐ OIL ____

OUTER FRAME
AM1204X-ST ☐
AM1204X-STS ☐
AM1204WC ☑
AM1204XT ☐

FRONT RIDE HEIGHT (FRH)	3.5 mm	FRONT DROOP (FD)	1 mm
REAR RIDE HEIGH (RRH)	3.5 mm	REAR DOWNSTOP (RD)	2,00 mm
GAP UNDER DAMPER (GUD)	3.7 mm	TRACK WIDTH	
DOWNSTOP NUT GAP (DNG)	1.0 mm	FRONT	168 mm
SPRING ROD HEIGHT (SRH)	mm	REAR	169 mm

BATTERY SMC 9200
BATTERY PLUGS FRONT ☑ BACK ☐
SERVO POSITION LEFT ☐ RIGHT ☐
ESC POSITION LEFT ☑ RIGHT ☐

SERVO
SERVO SAVER
SHIMS ON SERVO SAVER mm
TOE OUT °
STEER. TRAVEL IN ° OUT °

TIRES	FRONT	REAR
BRAND	Jaco	Jaco
TYPE	Spec	Spec
DIAMETER	39.1 mm	40.0 mm
GLUED SIDEWALLS	FRONT ☑	REAR ☑

ADDITIVE
FRONT ____ mm REAR
TIME 10 min TIME 10 min

MOTOR JDR 17.5
SPUR 65 PINION 52 ROLLOUT 100,53
ESC HOBBYWING 1S
ESC SETTINGS
BODY M20
BEST LAPTIME 9.8

TOTAL WEIGHT 731
F/R WEIGHT DISTRIBUTION
RECEIVER Sanwa
RADIO Sanwa
REAR BODY HEIGHT (SIDE DAMS) mm
QUALIF / FINAL POSITION 1 / 1

COMMENTS: